


3026

Mat = C45  
Max T/m = 50  
 $\alpha = 45^\circ$


835 mm	13,0 kg
415 mm	6,0 kg
805 mm	13,0 kg
FRAZ. / SECT.	

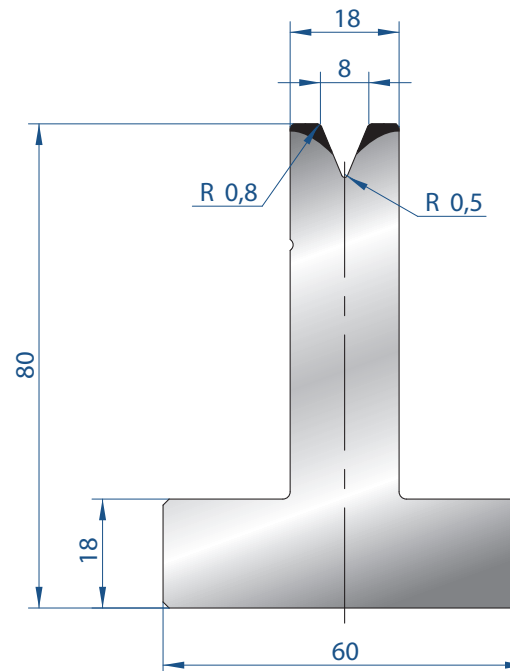

3027

Mat = C45  
Max T/m = 50  
 $\alpha = 45^\circ$


835 mm	15,0 kg
415 mm	7,0 kg
805 mm	15,0 kg
FRAZ. / SECT.	

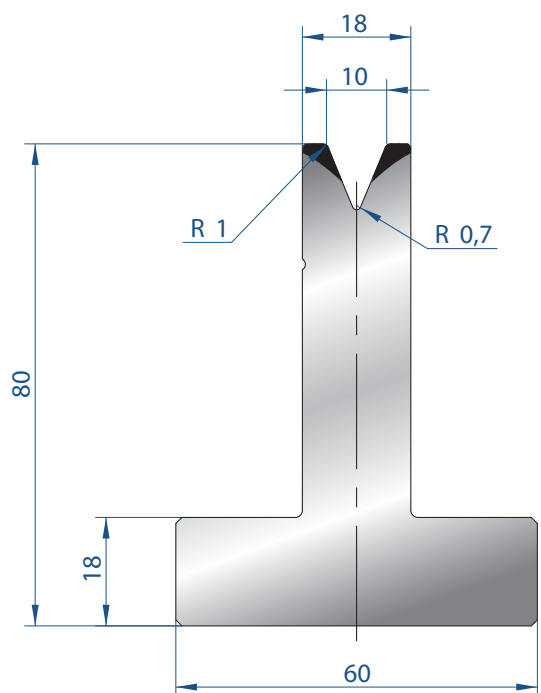

3028

Mat = C45  
Max T/m = 50  
 $\alpha = 45^\circ$

835 mm	15,0 kg
415 mm	7,0 kg
805 mm	15,0 kg
FRAZ. / SECT.	

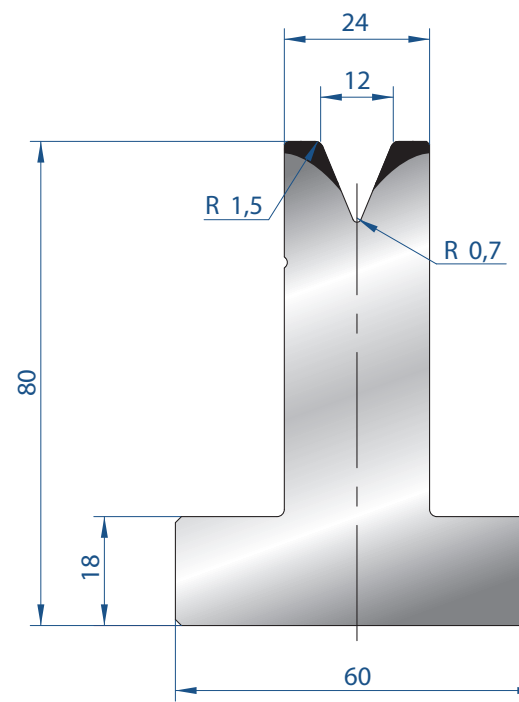


3029

Mat = C45  
Max T/m = 50  
 $\alpha = 45^\circ$

835 mm	18,0 kg
415 mm	9,0 kg
805 mm	18,0 kg
FRAZ. / SECT.	




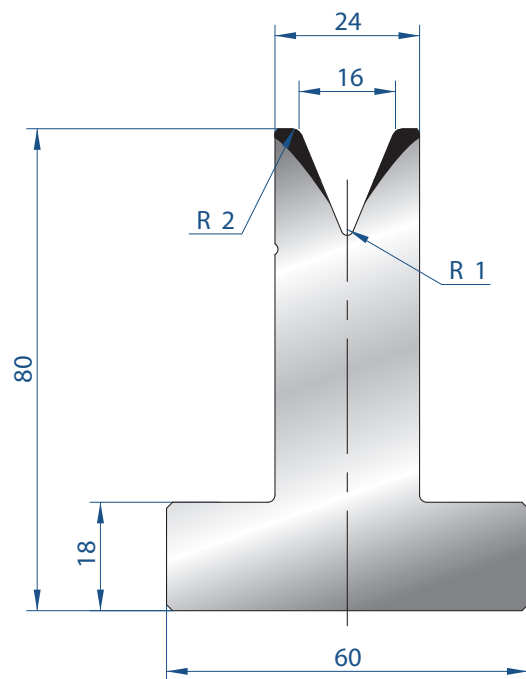

3030

Mat = C45  
Max T/m = 50  
 $\alpha = 45^\circ$


835 mm	18,0 kg
415 mm	9,0 kg
805 mm FRAZ. / SECT.	18,0 kg

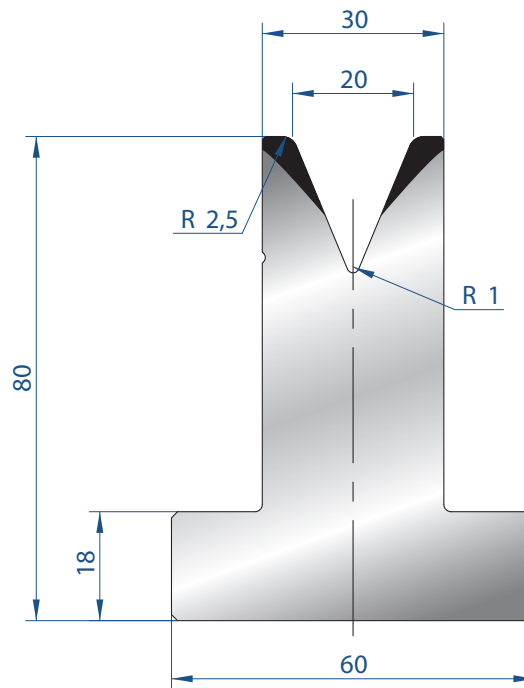

3031

Mat = C45  
Max T/m = 50  
 $\alpha = 45^\circ$


835 mm	18,0 kg
415 mm	9,0 kg
805 mm FRAZ. / SECT.	18,0 kg

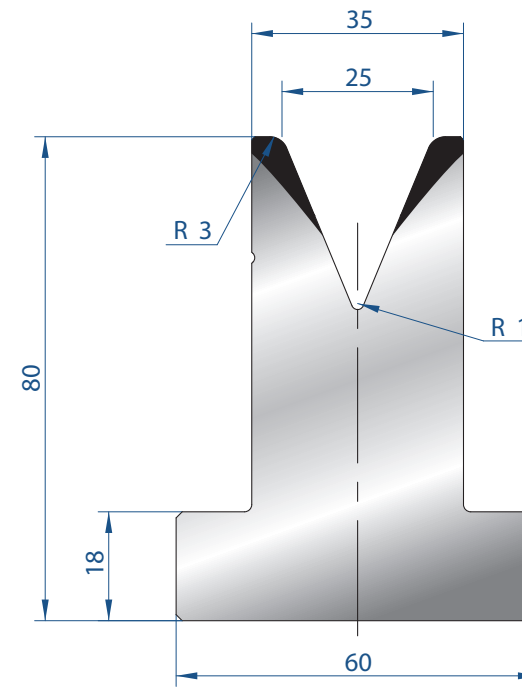

3032

Mat = C45  
Max T/m = 50  
 $\alpha = 45^\circ$


835 mm	20,0 kg
415 mm	10,0 kg
805 mm FRAZ. / SECT.	20,0 kg

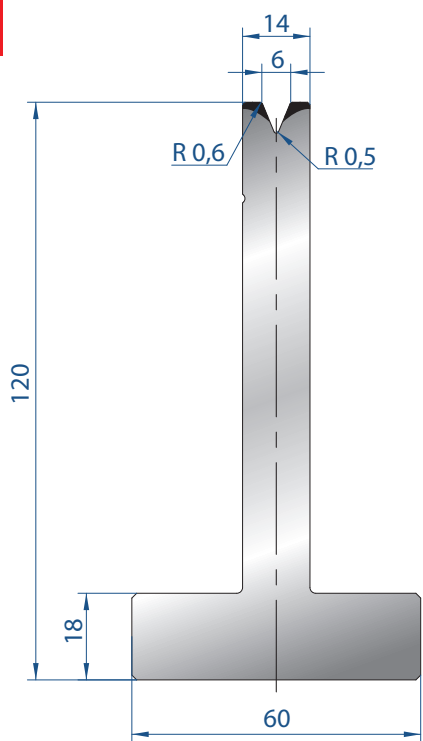

3066

Mat = C45  
Max T/m = 50  
 $\alpha = 45^\circ$


835 mm	17,0 kg
415 mm	8,0 kg
805 mm FRAZ. / SECT.	17,0 kg

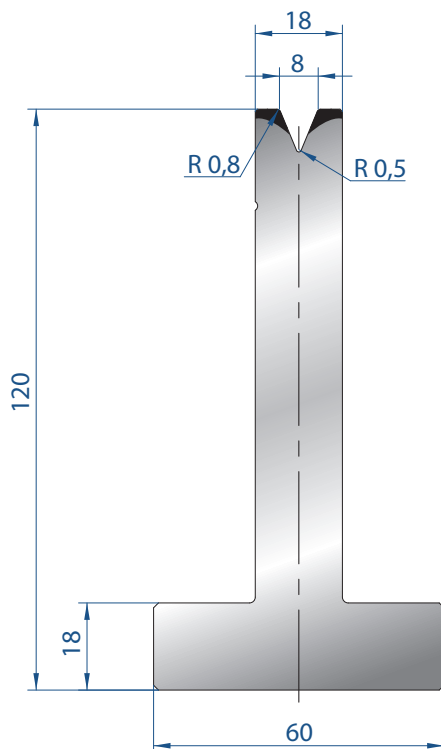

3067

Mat = C45  
Max T/m = 50  
 $\alpha = 45^\circ$


835 mm	17,0 kg
415 mm	8,0 kg
805 mm FRAZ. / SECT.	17,0 kg

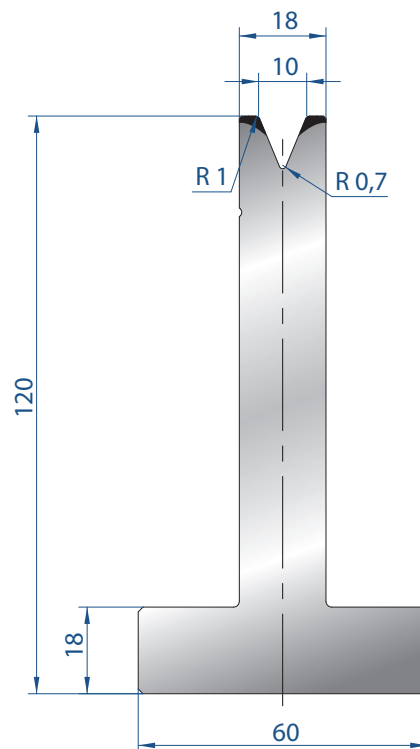

3068

Mat = C45  
Max T/m = 50  
 $\alpha = 45^\circ$

835 mm	18,0 kg
415 mm	8,0 kg
805 mm FRAZ. / SECT.	17,0 kg

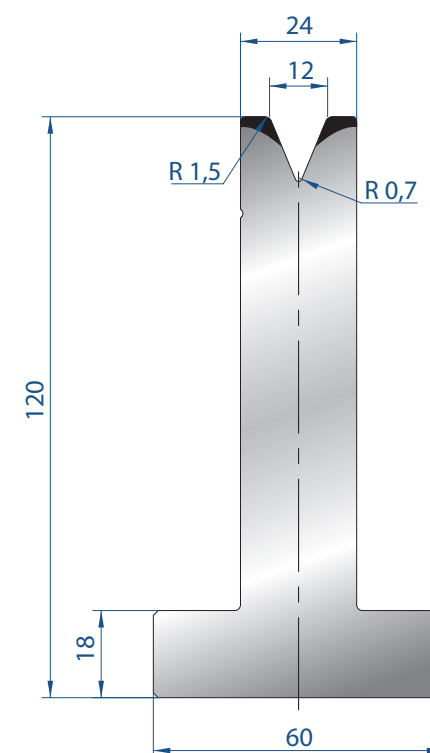


3069

Mat = C45  
Max T/m = 50  
 $\alpha = 45^\circ$

835 mm	22,0 kg
415 mm	11,0 kg
805 mm FRAZ. / SECT.	22,0 kg




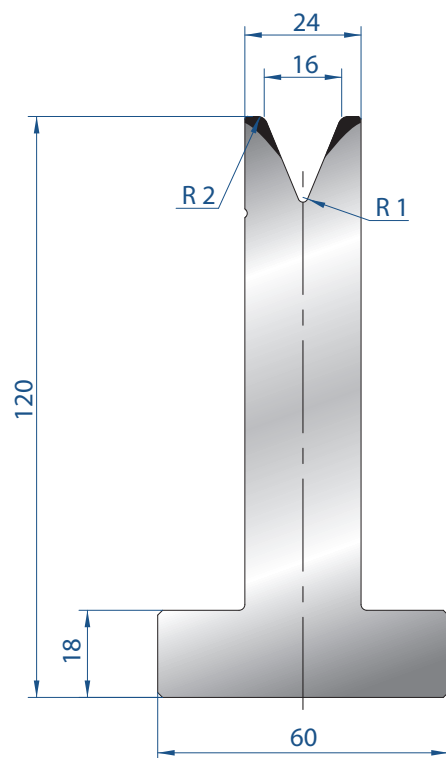

3070

Mat = C45  
Max T/m = 50  
 $\alpha = 45^\circ$


835 mm	22,0 kg
415 mm	11,0 kg
805 mm FRAZ. / SECT.	22,0 kg

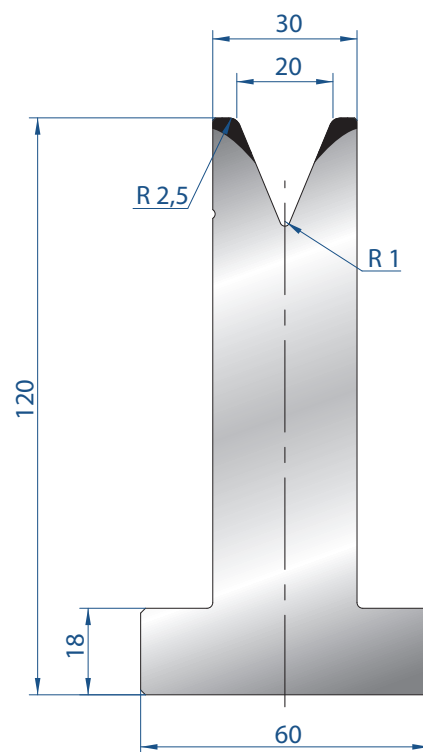

3071

Mat = C45  
Max T/m = 50  
 $\alpha = 45^\circ$


835 mm	27,0 kg
415 mm	13,0 kg
805 mm FRAZ. / SECT.	27,0 kg

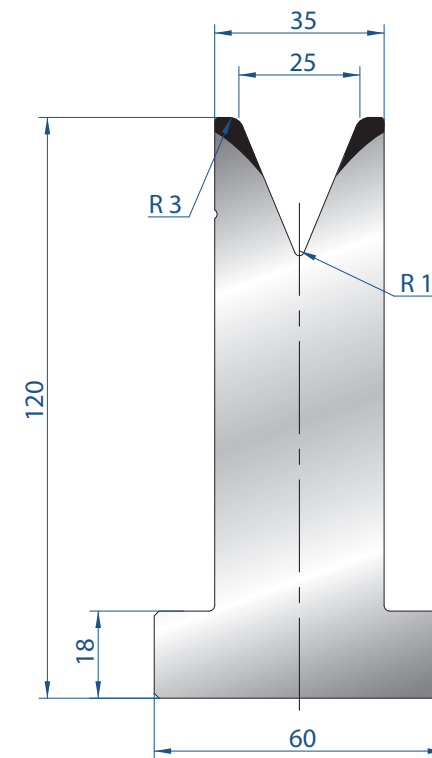

3072

Mat = C45  
Max T/m = 50  
 $\alpha = 45^\circ$


835 mm	30,0 kg
415 mm	15,0 kg
805 mm FRAZ. / SECT.	30,0 kg

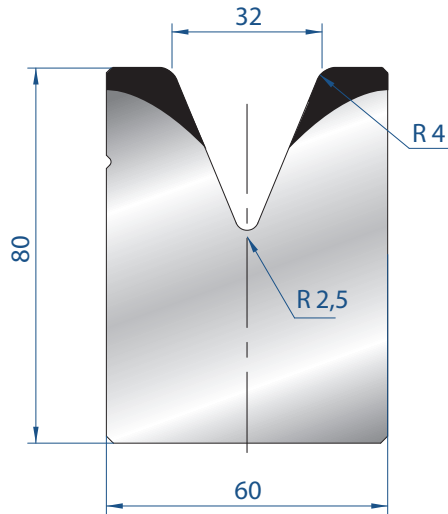

2088

Mat = C45  
Max T/m = 100  
 $\alpha = 45^\circ$


835 mm	28,0 kg
415 mm	14,0 kg
805 mm FRAZ. / SECT.	28,0 kg

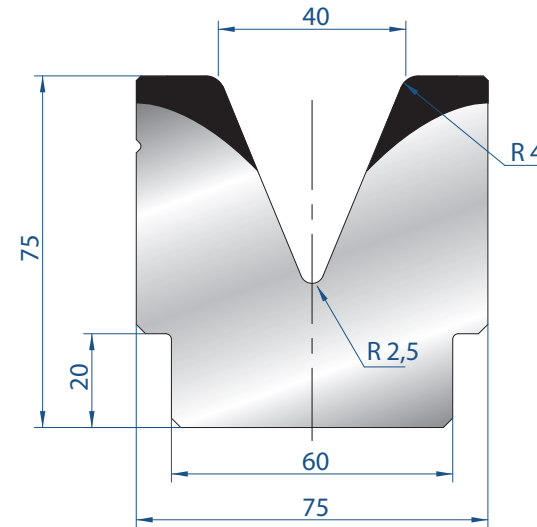

2081

Mat = C45  
Max T/m = 100  
 $\alpha = 45^\circ$


835 mm	33,0 kg
415 mm	16,0 kg
805 mm FRAZ. / SECT.	33,0 kg

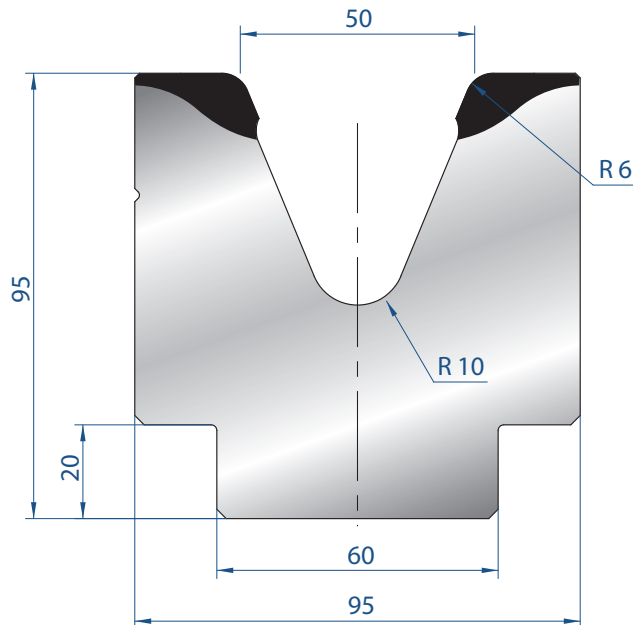

2118

Mat = C45  
Max T/m = 100  
 $\alpha = 45^\circ$

835 mm	36,0 kg
415 mm	18,0 kg
805 mm FRAZ. / SECT.	36,0 kg

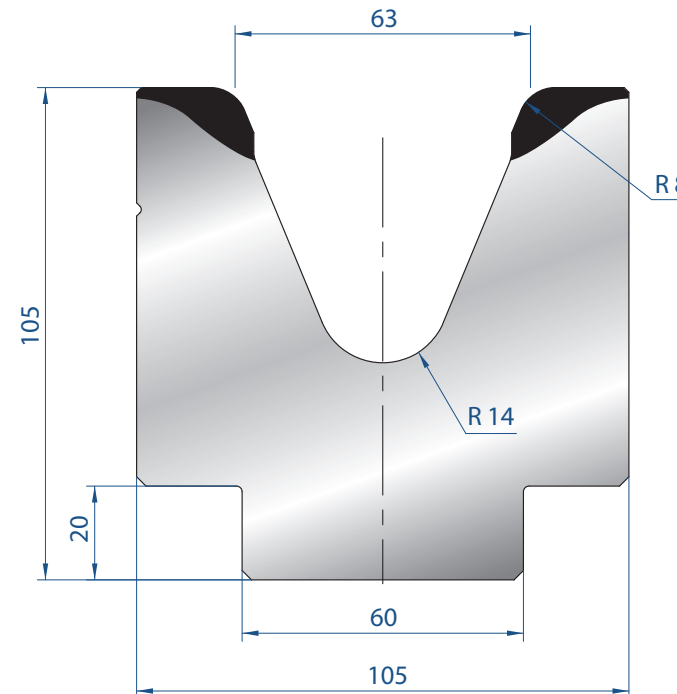

2117


Mat = C45  
Max T/m = 100  
 $\alpha = 45^\circ$

835 mm	34,0 kg
415 mm	17,0 kg
805 mm FRAZ. / SECT.	34,0 kg



MATRICI 1V - 45° / 1V DIES - 45°

AMADA  
PROMECAM STYLE

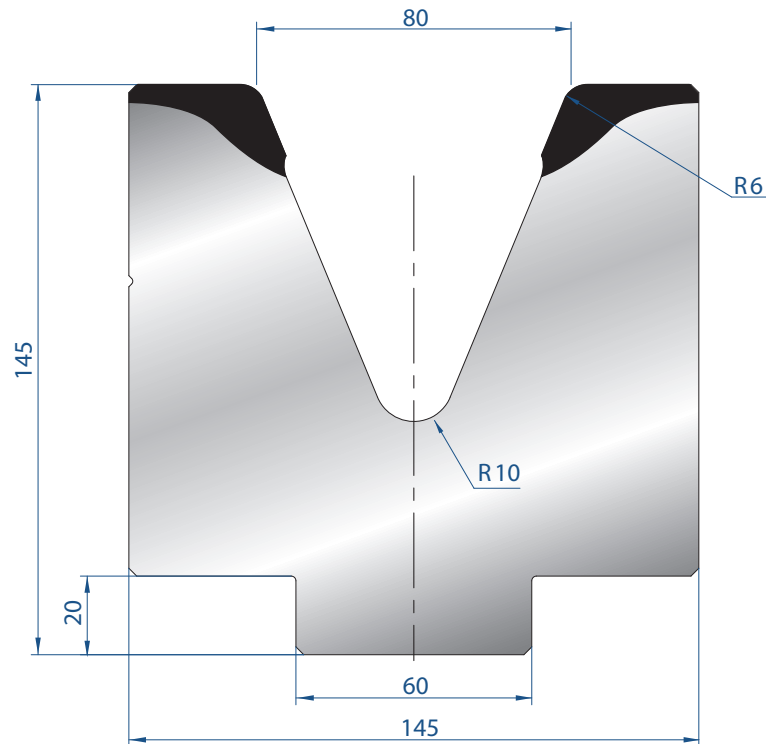

2084

Mat = C45

Max T/m = 100

$\alpha = 45^\circ$

835 mm	102,0 kg
415 mm	51,0 kg
805 mm FRAZ. / SECT.	102,0 kg