


1035

Mat = C45  
 H = 80.00  
 Max T/m = 70  
 $\alpha = 35^\circ$   
 R = 0.5


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

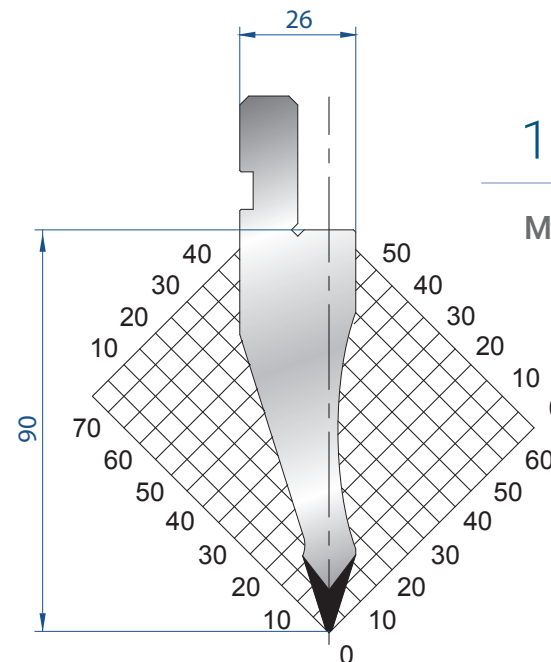

1047

Mat = C45  
 H = 90.00  
 Max T/m = 70  
 $\alpha = 35^\circ$   
 R = 0.8


835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	

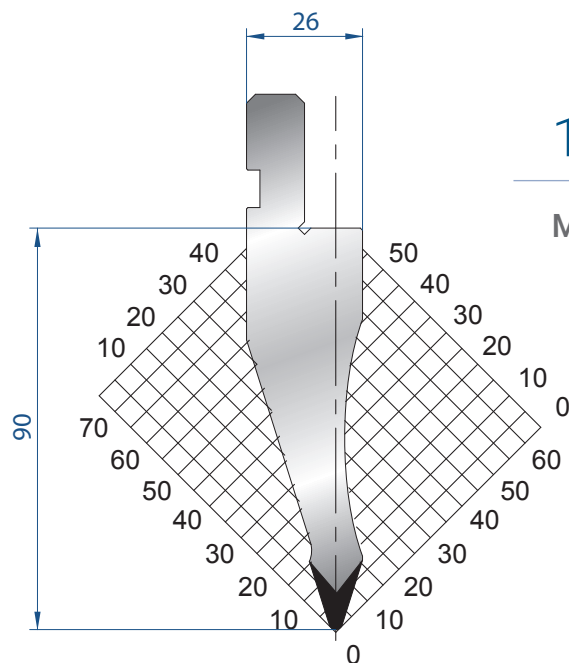

1282

Mat = C45  
 H = 90.00  
 Max T/m = 70  
 $\alpha = 35^\circ$   
 R = 1.5

835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	

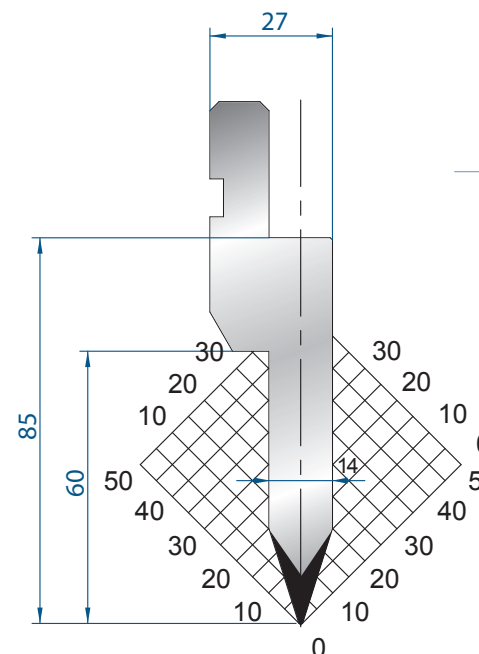

1034

Mat = C45  
 H = 85.00  
 Max T/m = 100  
 $\alpha = 35^\circ$   
 P = 0.8

835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	