


1053

Mat = C45
H = 100.00
Max T/m = 100
 $\alpha = 45^\circ$
R = 6


835 mm	19,0 kg
415 mm	9,0 kg
805 mm	19,0 kg
FRAZ. / SECT.	

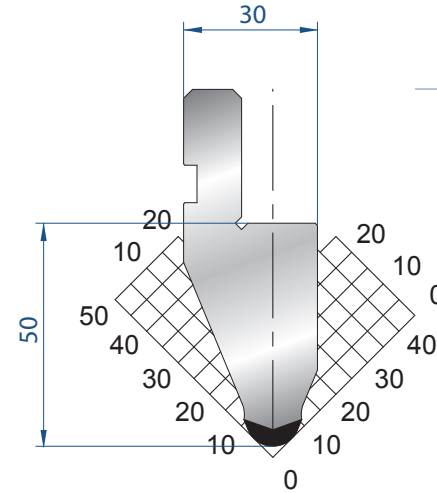

1054

Mat = C45
H = 50.00
Max T/m = 100
 $\alpha = 45^\circ$
R = 6


835 mm	9,0 kg
415 mm	4,0 kg
805 mm	9,0 kg
FRAZ. / SECT.	

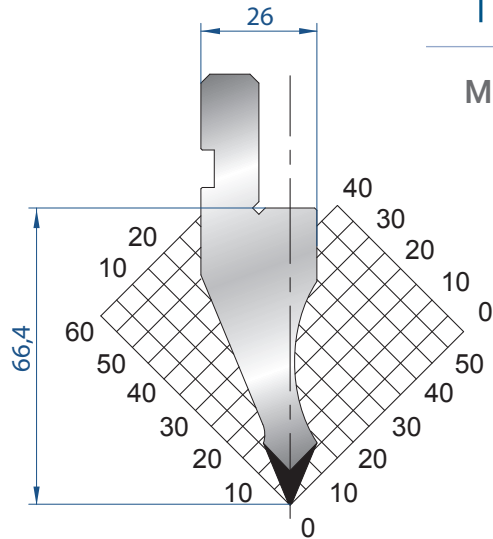

1024

Mat = C45
H = 66.40
Max T/m = 80
 $\alpha = 45^\circ$
R = 0.5

835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	

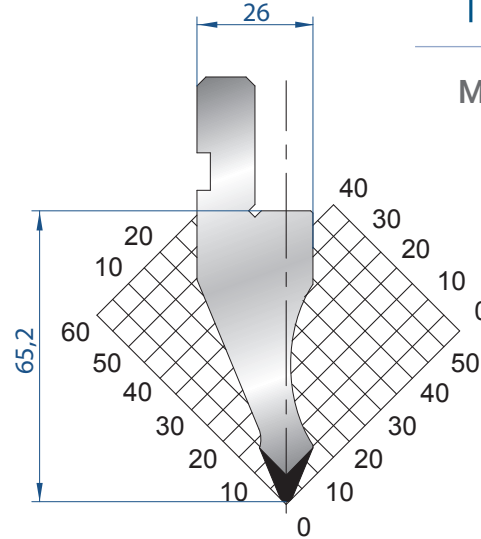

1025

Mat = C45
H = 65.20
Max T/m = 80
 $\alpha = 45^\circ$
R = 1.5

835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	

