


1177

Mat = C45
H = 65.50
Max T/m = 100
 $\alpha = 85^\circ$
R = 3


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

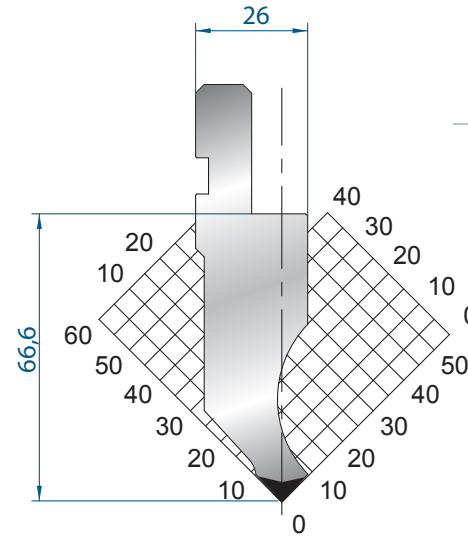

1260

Mat = C45
H = 66.60
Max T/m = 100
 $\alpha = 85^\circ$
R = 0.8


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

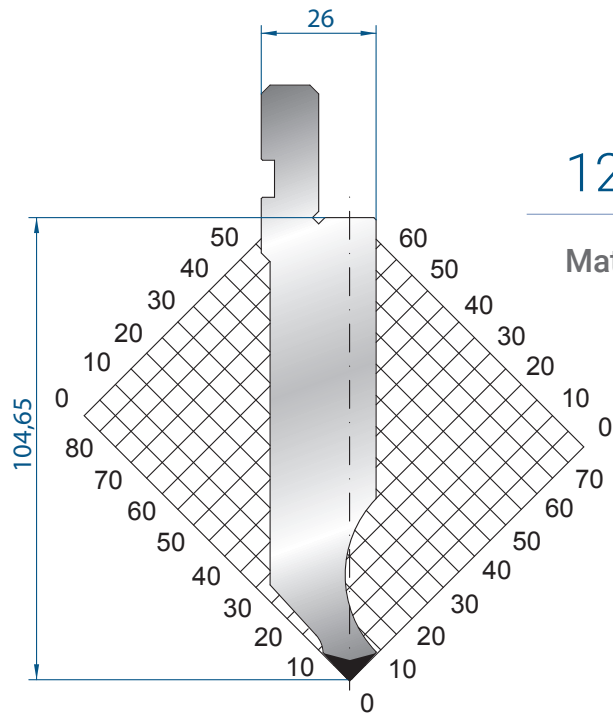

1281

Mat = C45
H = 104.65
Max T/m = 100
 $\alpha = 85^\circ$
R = 0.8

835 mm	17,0 kg
415 mm	9,0 kg
805 mm	17,0 kg
FRAZ. / SECT.	

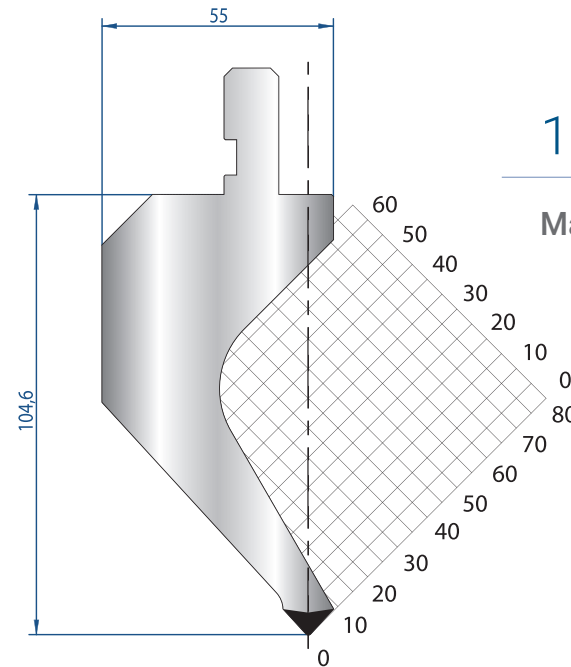


1172

Mat = C45
H = 104.60
Max T/m = 50
 $\alpha = 85^\circ$
R = 0.8

835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	




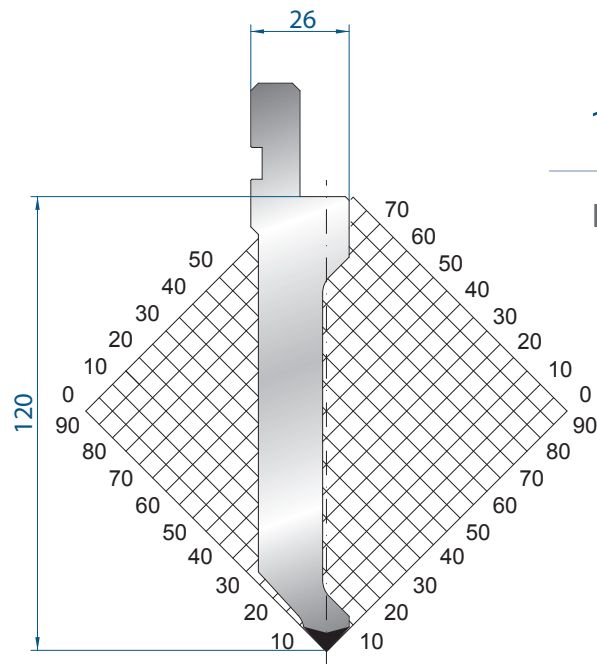

1309

Mat = C45
H = 120.00
Max T/m = 70
 $\alpha = 85^\circ$
R = 0.8


835 mm	15,9 kg
415 mm	8,0 kg
805 mm	15,9 kg
FRAZ. / SECT.	

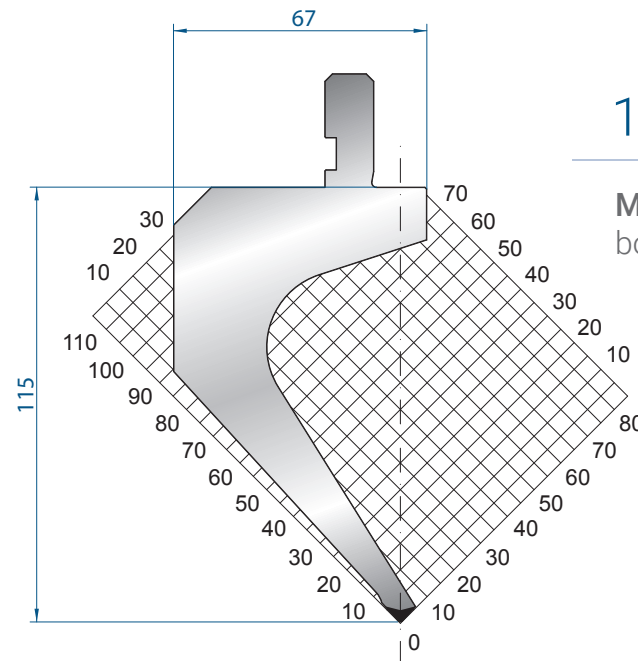

1310

Mat = 42CrMo4
bonificato / tempered
H = 115.00
Max T/m = 35
 $\alpha = 85^\circ$
R = 0.8


835 mm	23,0 kg
415 mm	11,5 kg
805 mm	23,0 kg
FRAZ. / SECT.	

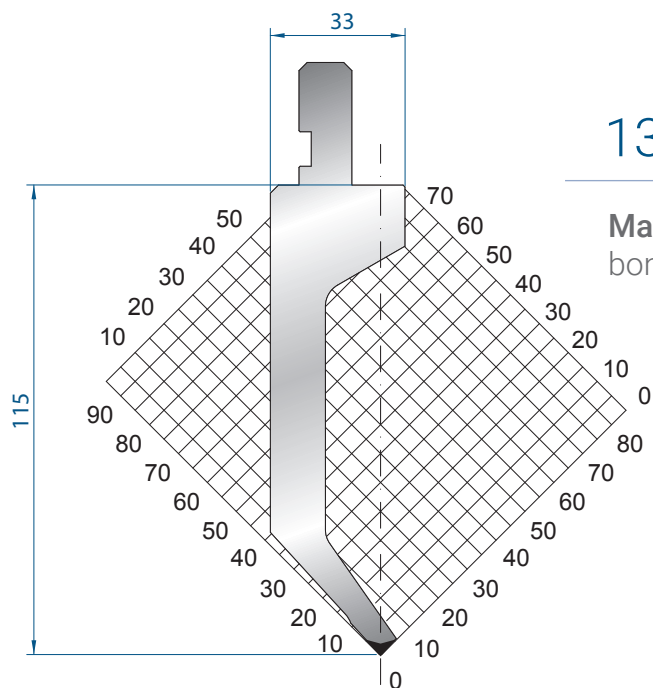

1312

Mat = 42CrMo4
bonificato / tempered
H = 115.00
Max T/m = 20
 $\alpha = 85^\circ$
R = 0.6

835 mm	14,5 kg
415 mm	7,2 kg
805 mm	14,5 kg
FRAZ. / SECT.	

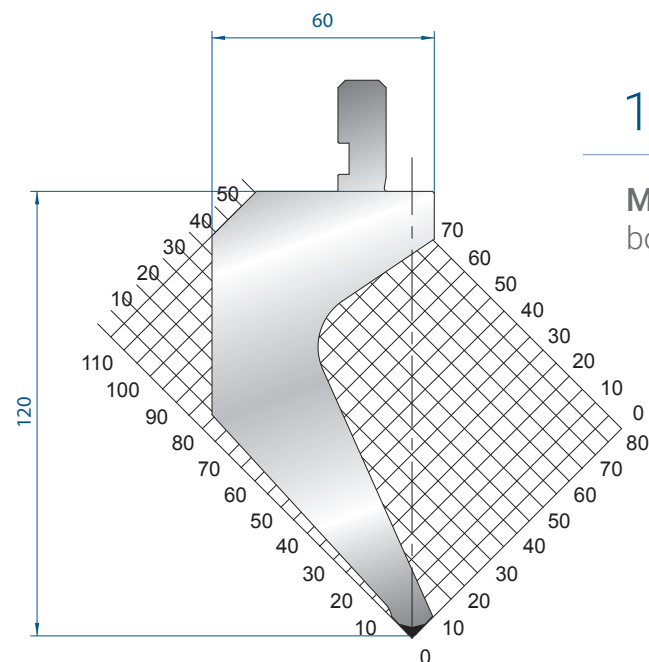

1322

Mat = 42CrMo4
bonificato / tempered
H = 120.00
Max T/m = 100
 $\alpha = 85^\circ$
R = 1.5

835 mm	26,7 kg
415 mm	13,3 kg
805 mm	26,7 kg
FRAZ. / SECT.	