


1011

Mat = C45  
 H = 66.65  
 Max T/m = 100  
 $\alpha = 88^\circ$   
 R = 0.8


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

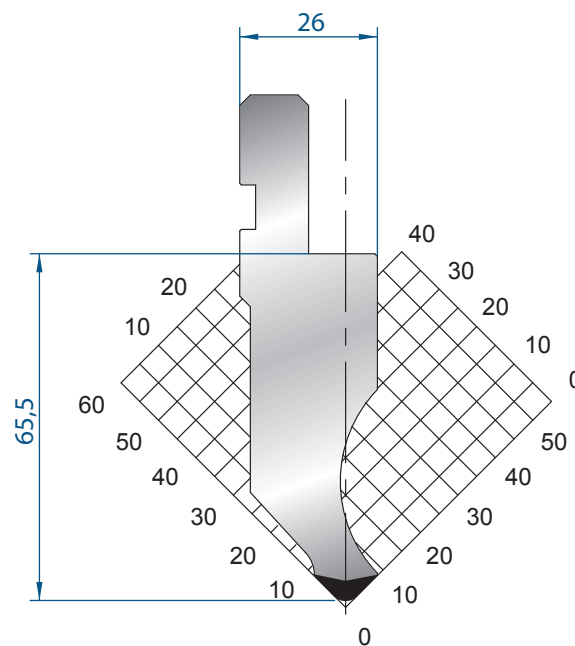

1012

Mat = C45  
 H = 65.50  
 Max T/m = 100  
 $\alpha = 88^\circ$   
 R = 3


835 mm	11,0 kg
415 mm	4,5 kg
805 mm	11,0 kg
FRAZ. / SECT.	

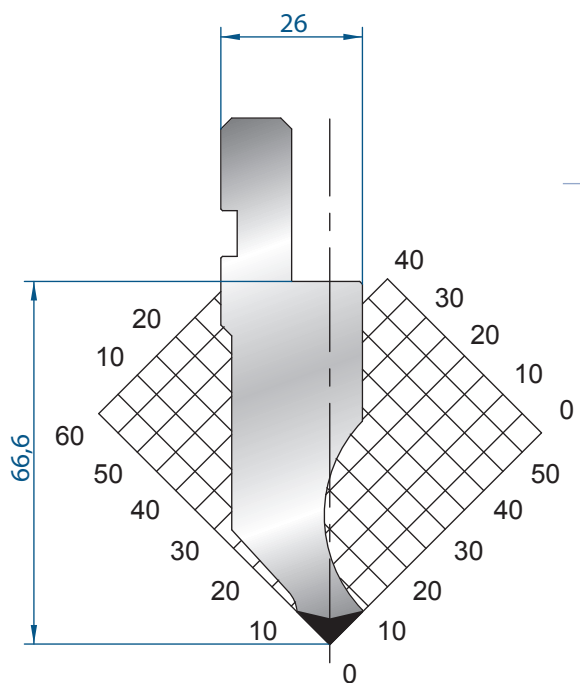

1065

Mat = C45  
 H = 66.60  
 Max T/m = 100  
 $\alpha = 88^\circ$   
 R = 0.25


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

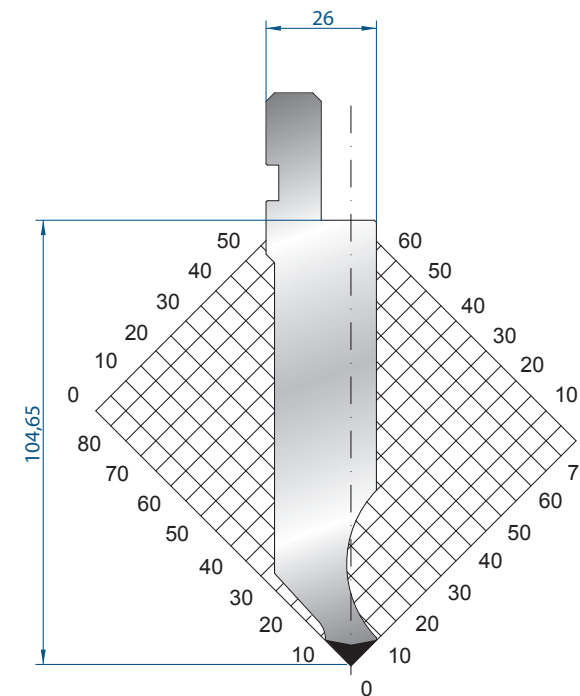

1063

Mat = C45  
 H = 104.65  
 Max T/m = 100  
 $\alpha = 88^\circ$   
 R = 0.8


835 mm	17,0 kg
415 mm	9,0 kg
805 mm	17,0 kg
FRAZ. / SECT.	

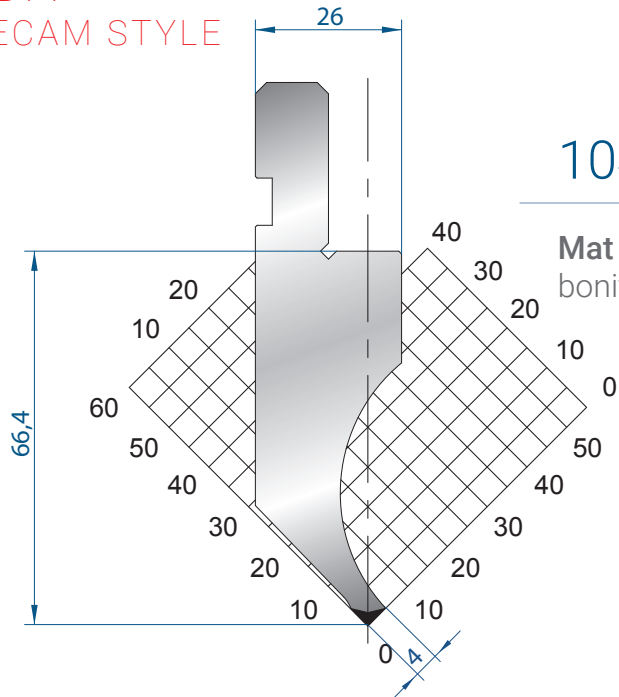

1049

Mat = C45  
bonificato / tempered  
H = 66.40  
Max T/m = 35  
 $\alpha = 88^\circ$   
R = 0.6


835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	

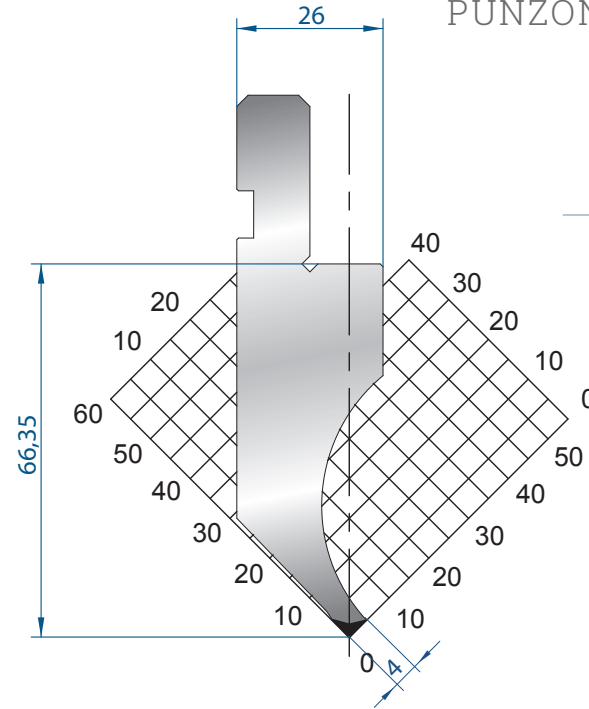

1264

Mat = C45  
bonificato / tempered  
H = 66.35  
Max T/m = 35  
 $\alpha = 88^\circ$   
R = 0.25


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

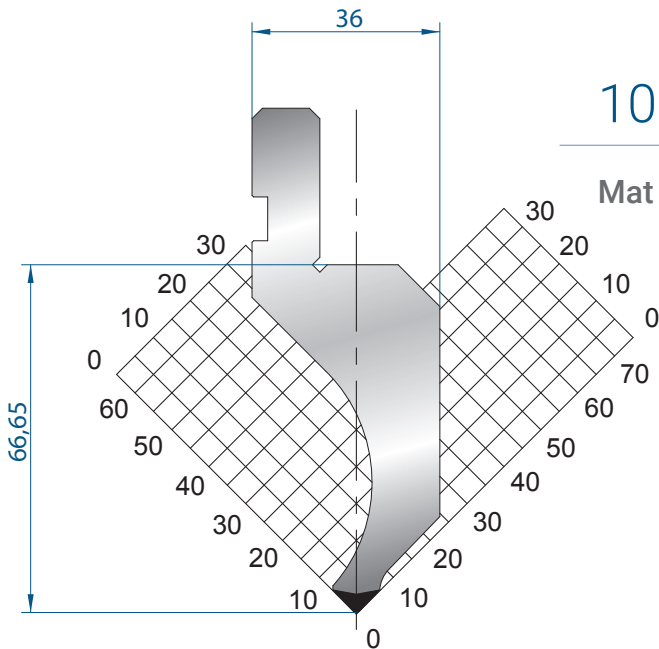

1081

Mat = C45  
H = 66.65  
Max T/m = 60  
 $\alpha = 88^\circ$   
R = 0.8

835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	

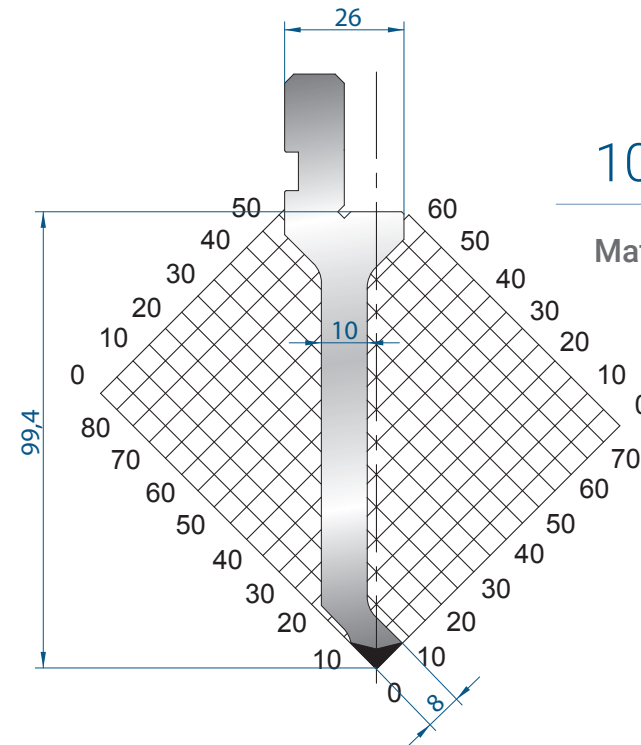


1029

Mat = C45  
H = 99.40  
Max T/m = 50  
 $\alpha = 88^\circ$   
R = 0.6

835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	




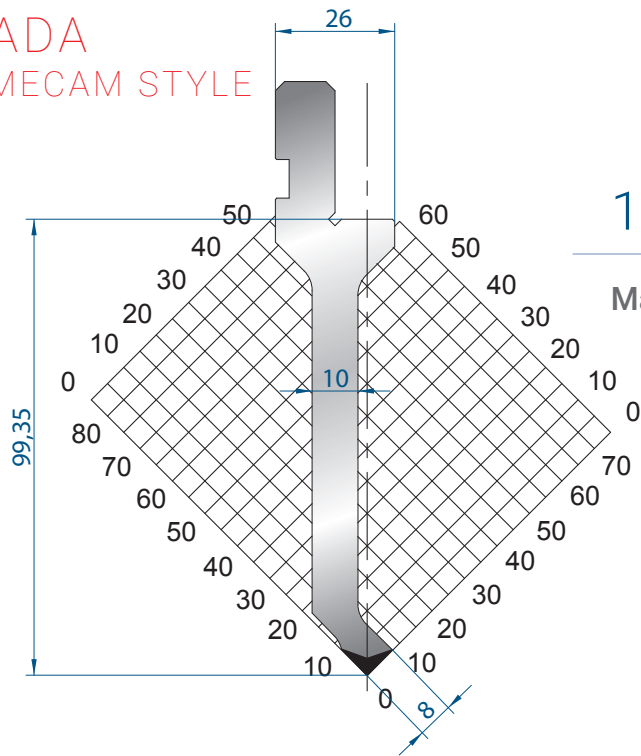

1262

Mat = C45  
H = 99.35  
Max T/m = 50  
 $\alpha = 88^\circ$   
R = 0.25


835 mm	9,0 kg
415 mm	4,0 kg
805 mm	9,0 kg
FRAZ. / SECT.	

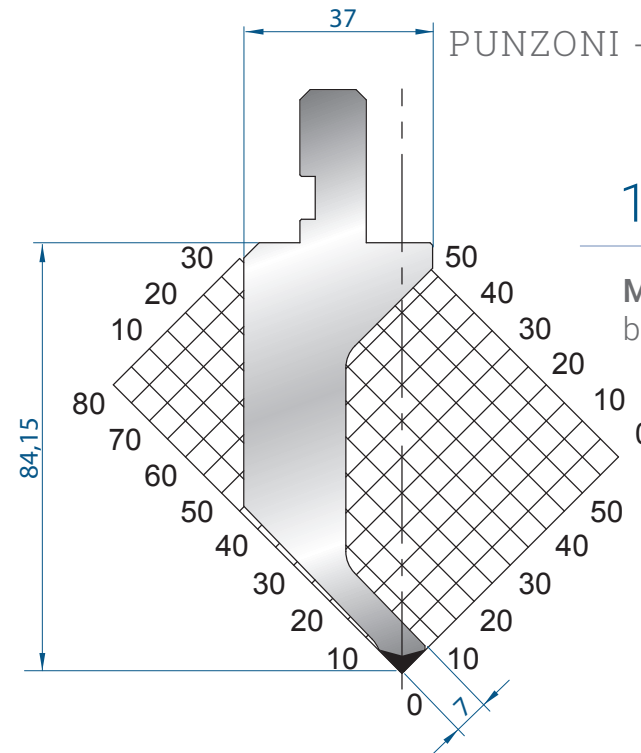

1020

Mat = 42CrMo4  
bonificato / tempered  
H = 84.15  
Max T/m = 20  
 $\alpha = 88^\circ$   
R = 0.6


835 mm	14,0 kg
415 mm	7,0 kg
805 mm	14,0 kg
FRAZ. / SECT.	

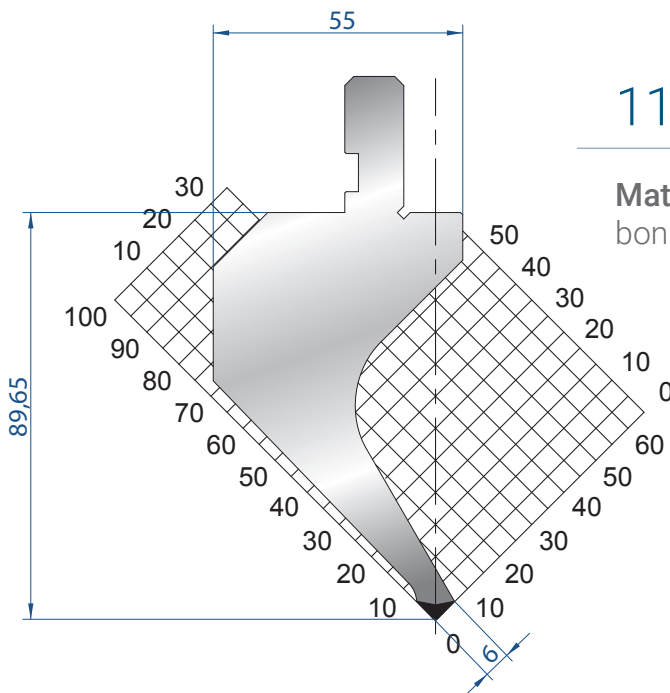

1175

Mat = C45  
bonificato / tempered  
H = 89.65  
Max T/m = 50  
 $\alpha = 88^\circ$   
R = 0.8

835 mm	21,0 kg
415 mm	10,0 kg
805 mm	21,0 kg
FRAZ. / SECT.	

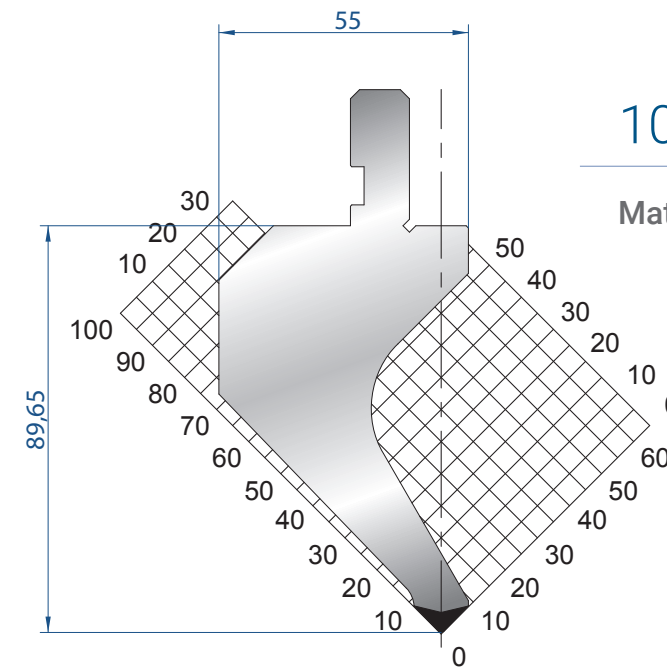


1014

Mat = C45  
H = 89.65  
Max T/m = 60  
 $\alpha = 88^\circ$   
R = 0.8

835 mm	21,0 kg
415 mm	10,5 kg
805 mm	21,0 kg
FRAZ. / SECT.	




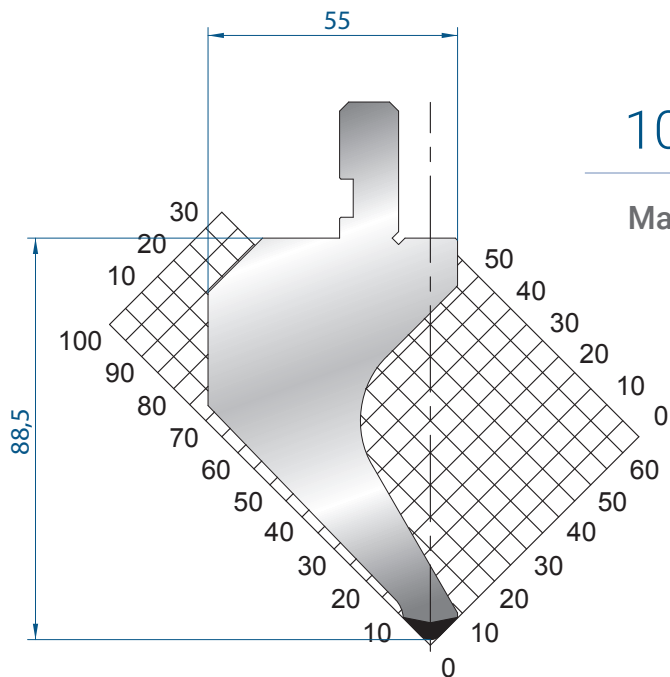

1015

Mat = C45  
H = 88.50  
Max T/m = 60  
 $\alpha = 88^\circ$   
R = 3


835 mm	21,0 kg
415 mm	10,5 kg
805 mm	21,0 kg
FRAZ. / SECT.	

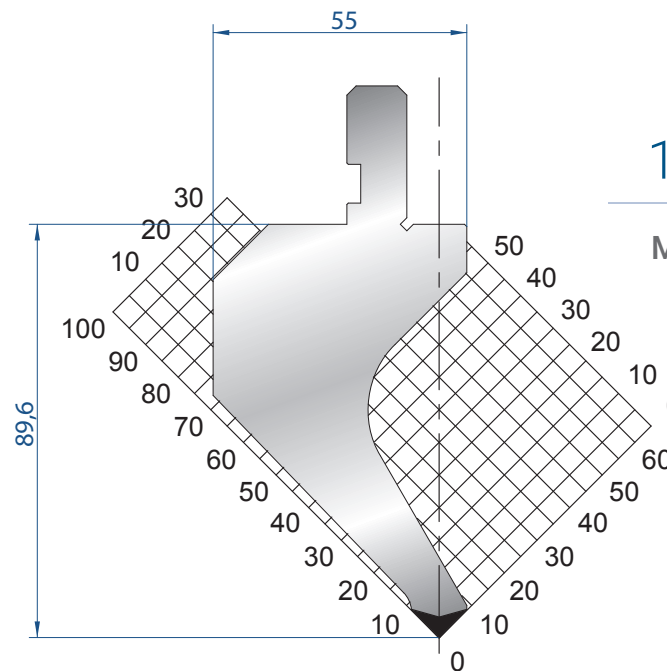

1266

Mat = C45  
H = 89.60  
Max T/m = 60  
 $\alpha = 88^\circ$   
R = 0.25


835 mm	21,0 kg
415 mm	10,0 kg
805 mm	21,0 kg
FRAZ. / SECT.	

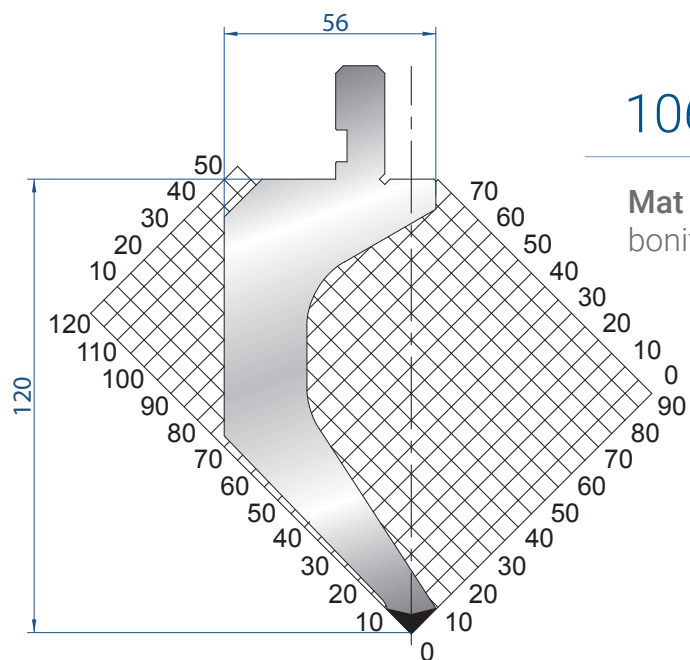

1061

Mat = C45  
bonificato / tempered  
H = 120.00  
Max T/m = 50  
 $\alpha = 88^\circ$   
R = 0.8


835 mm	24,0 kg
415 mm	12,0 kg
805 mm	24,0 kg
FRAZ. / SECT.	

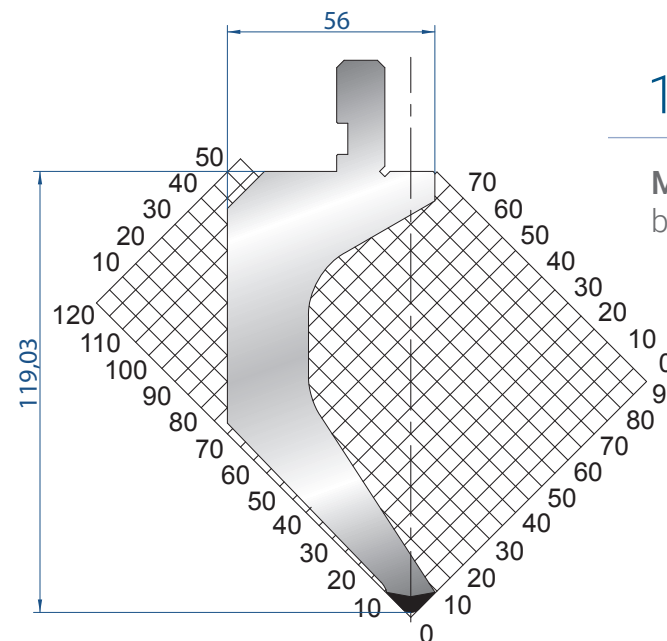

1062

Mat = C45  
bonificato / tempered  
H = 119.03  
Max T/m = 50  
 $\alpha = 88^\circ$   
R = 3


835 mm	24,0 kg
415 mm	12,0 kg
805 mm	24,0 kg
FRAZ. / SECT.	

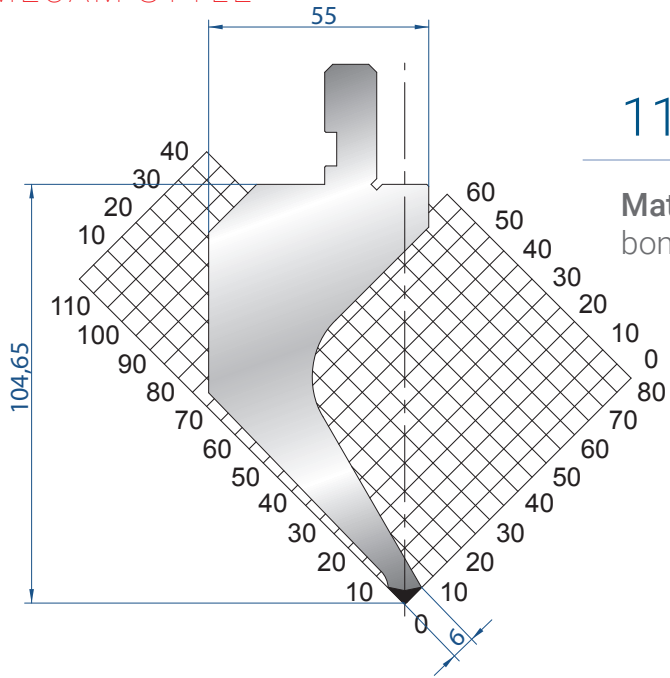

1173

Mat = C45  
bonificato / tempered  
H = 104.65  
Max T/m = 50  
 $\alpha = 88^\circ$   
R = 0.8


835 mm	23,0 kg
415 mm	11,0 kg
805 mm FRAZ. / SECT.	23,0 kg

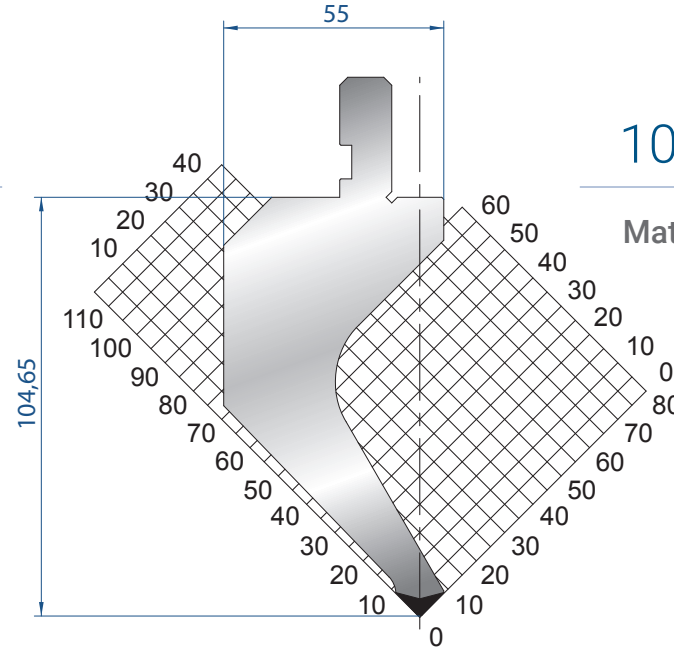

1017

Mat = C45  
H = 104.65  
Max T/m = 50  
 $\alpha = 88^\circ$   
R = 0.8


835 mm	23,0 kg
415 mm	11,0 kg
805 mm FRAZ. / SECT.	23,0 kg

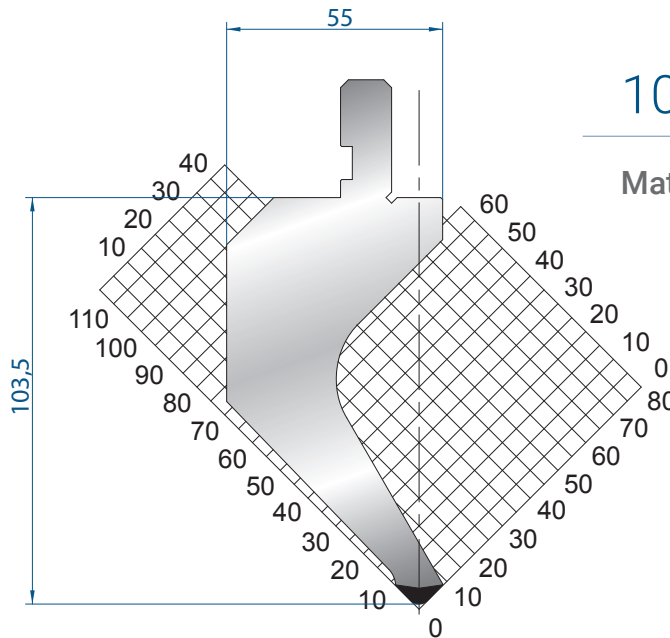

1018

Mat = C45  
H = 103.50  
Max T/m = 50  
 $\alpha = 88^\circ$   
R = 3

835 mm	23,0 kg
415 mm	11,0 kg
805 mm FRAZ. / SECT.	23,0 kg

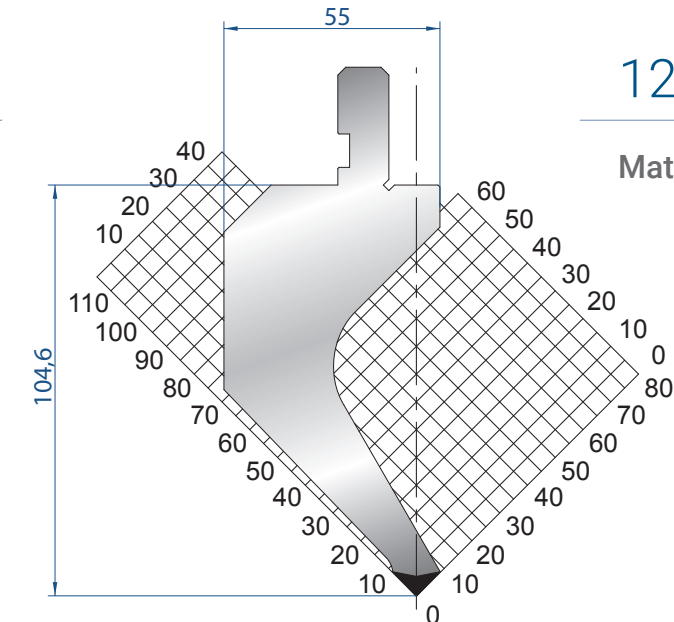


1268

Mat = C45  
H = 104.60  
Max T/m = 50  
 $\alpha = 88^\circ$   
R = 0.25

835 mm	23,0 kg
415 mm	11,0 kg
805 mm FRAZ. / SECT.	23,0 kg



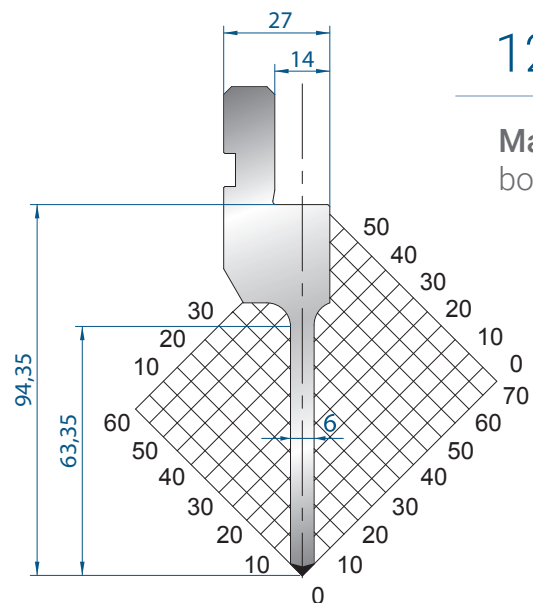


## 1270

Mat = C45  
bonificato / tempered

H = 94.35  
Max T/m = 50  
 $\alpha = 88^\circ$   
R = 0.25


835 mm	8,0 kg
415 mm	4,0 kg
805 mm	8,0 kg
FRAZ. / SECT.	

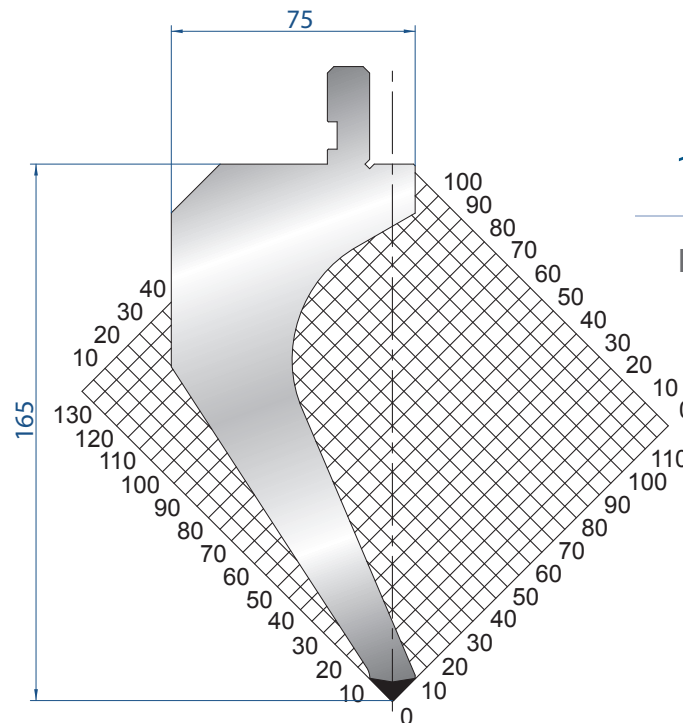

## 1031

Mat = C45  
H = 104.65  
Max T/m = 45  
 $\alpha = 88^\circ$   
R = 0.8

835 mm	41,0 kg
415 mm	20,0 kg
805 mm	41,0 kg
FRAZ. / SECT.	

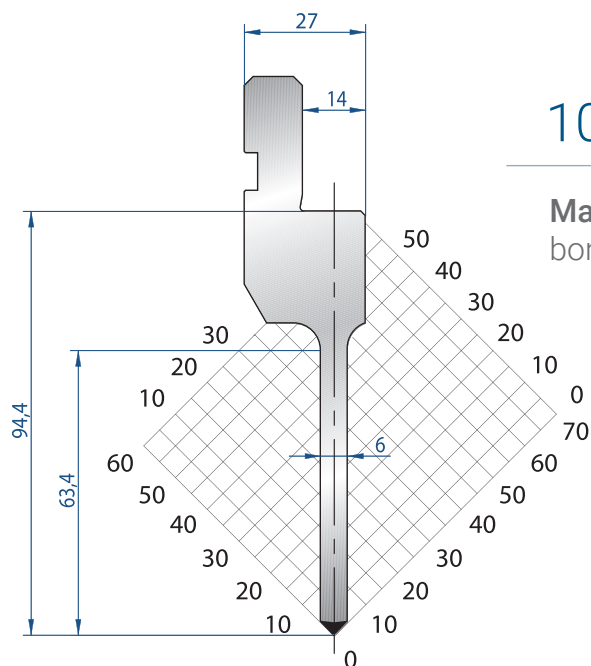


## 1084

Mat = C45  
bonificato / tempered

H = 94.40  
Max T/m = 50  
 $\alpha = 88^\circ$   
R = 0.6


835 mm	8,0 kg
415 mm	4,0 kg
805 mm	8,0 kg
FRAZ. / SECT.	

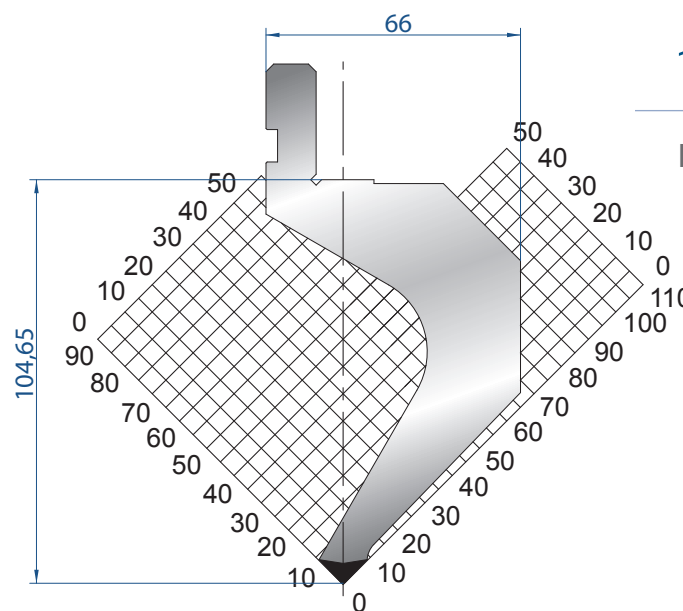

## 1082

Mat = C45  
H = 104.65  
Max T/m = 45  
 $\alpha = 88^\circ$   
R = 0.8


835 mm	25,0 kg
415 mm	12,0 kg
805 mm	25,0 kg
FRAZ. / SECT.	

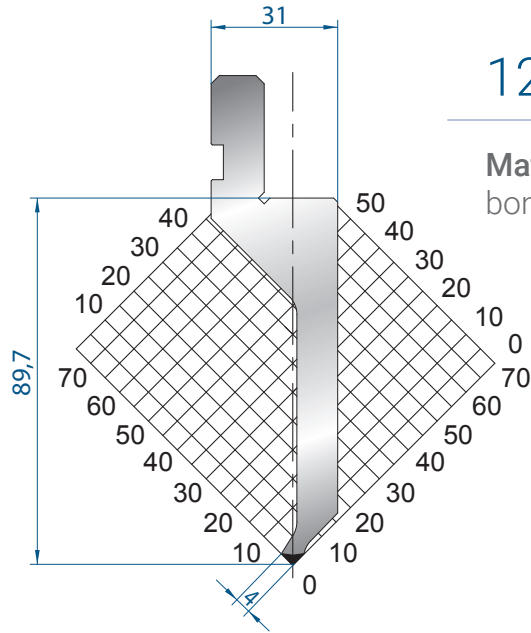

1290

Mat = C45  
bonificato / tempered  
H = 89.70  
Max T/m = 30  
 $\alpha = 88^\circ$   
R = 0.6


835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	

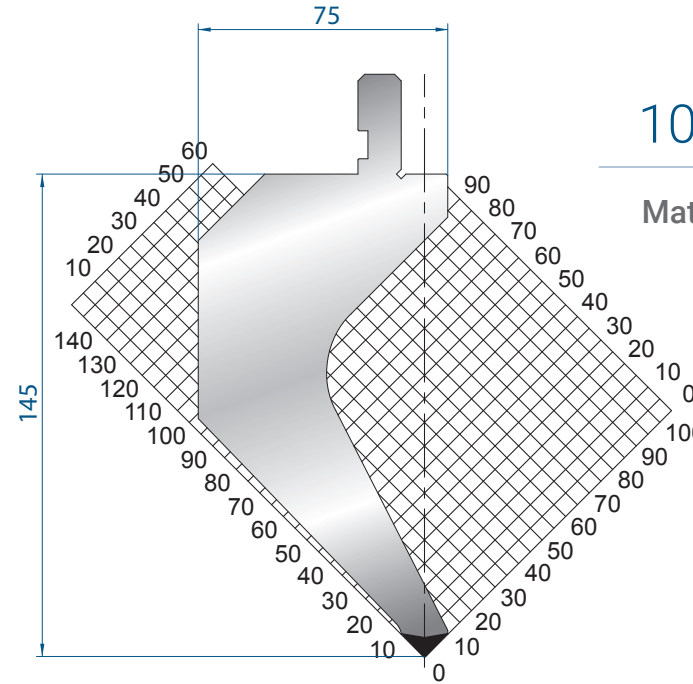

1030

Mat = C45  
H = 145.00  
Max T/m = 80  
 $\alpha = 88^\circ$   
R = 0.8


835 mm	39,0 kg
415 mm	19,0 kg
805 mm	39,0 kg
FRAZ. / SECT.	

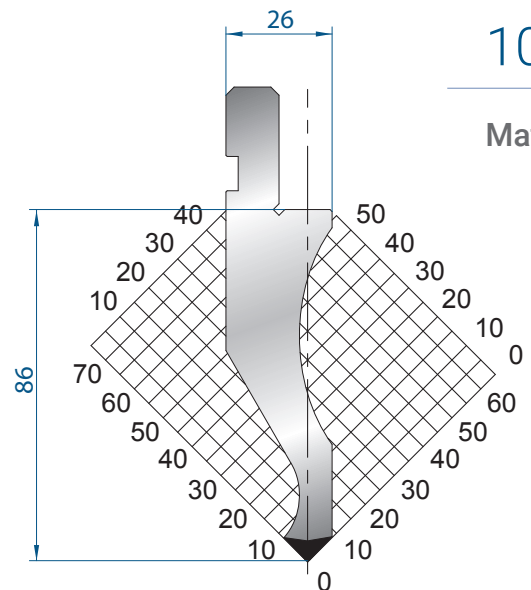

1022

Mat = C45  
H = 86.00  
Max T/m = 100  
 $\alpha = 88^\circ$   
R = 0.8

835 mm	13,0 kg
415 mm	6,0 kg
805 mm	13,0 kg
FRAZ. / SECT.	

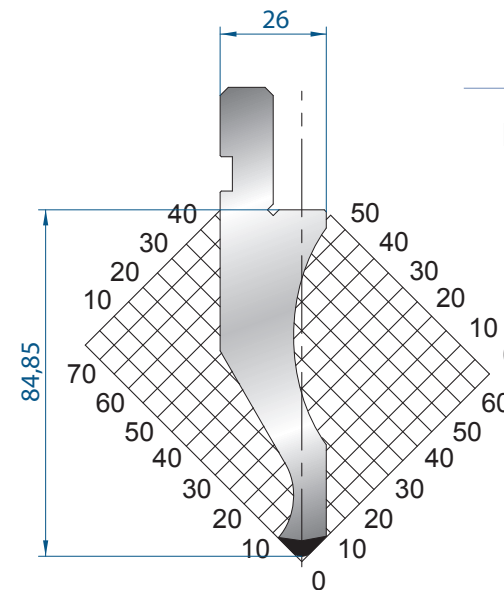

1023

Mat = C45  
H = 84.85  
Max T/m = 100  
 $\alpha = 88^\circ$   
R = 3

835 mm	13,0 kg
415 mm	6,0 kg
805 mm	13,0 kg
FRAZ. / SECT.	




# 1291

Mat = C45  
bonificato / tempered

H = 200.00  
Max T/m = 85  
 $\alpha = 88^\circ$   
R = 0.8

505 mm	32,5 kg
805 mm	54,0 kg
FRAZ. / SECT.	

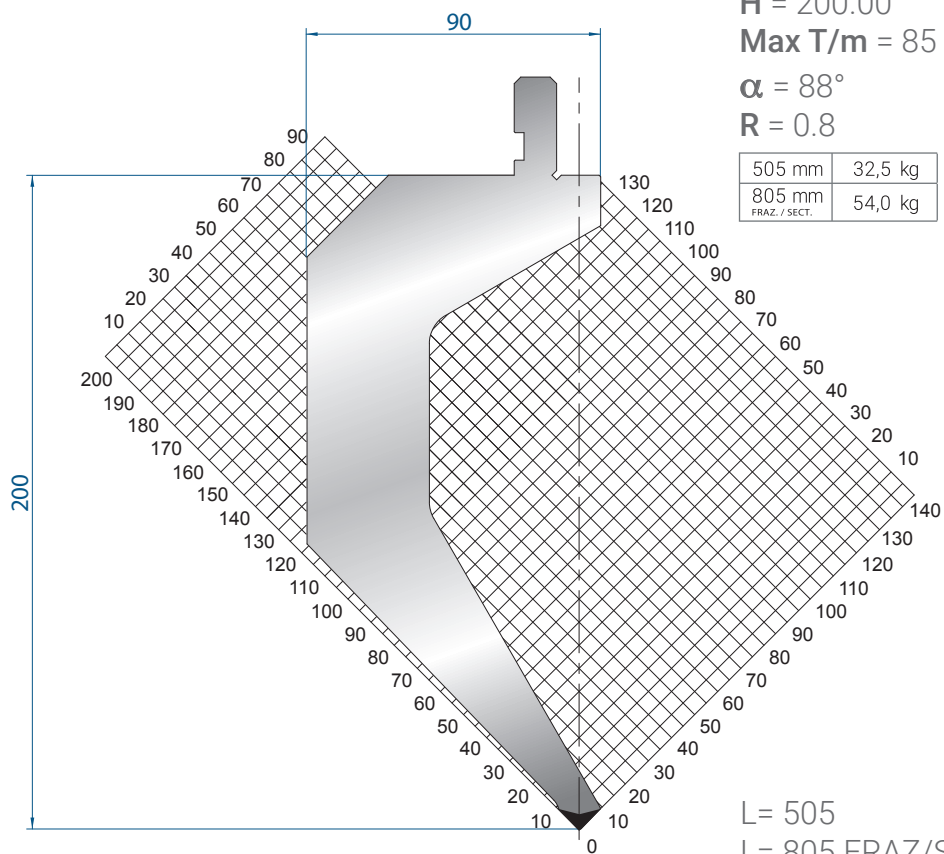


L = 505  
L = 805 FRAZ/SECT

# 1301

Mat = C45  
bonificato / tempered

H = 199.03  
Max T/m = 85  
 $\alpha = 88^\circ$   
R = 3

505 mm	32,5 kg
805 mm	54,0 kg
FRAZ. / SECT.	

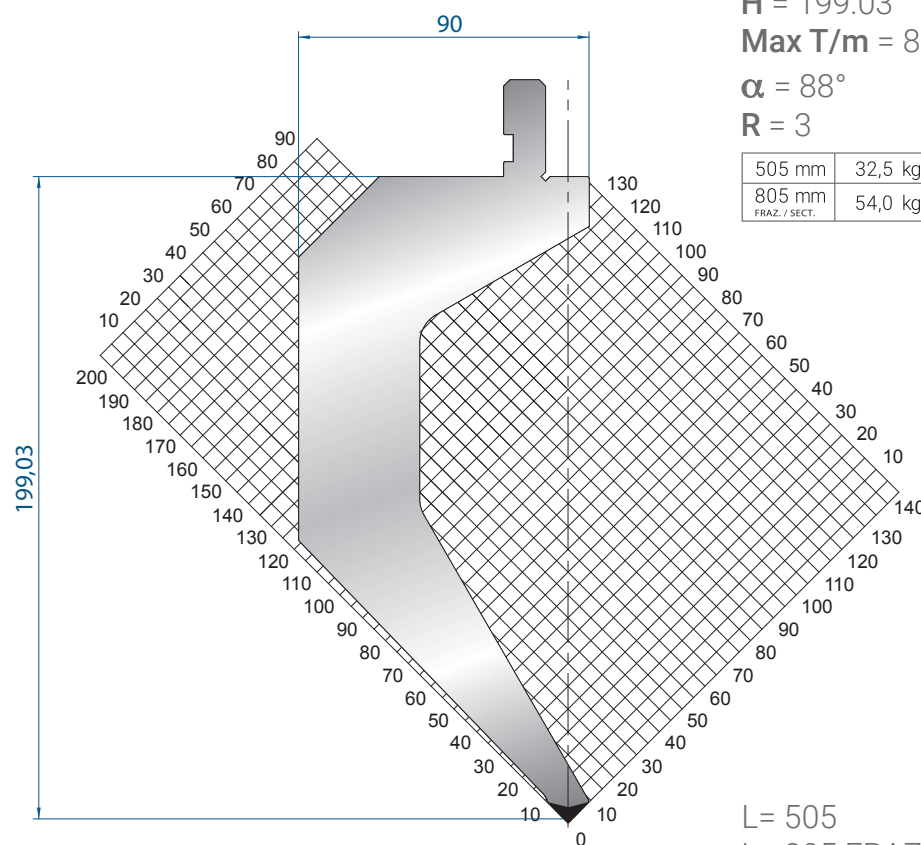

L = 505  
L = 805 FRAZ/SECT