


1010

Mat = C45
H = 66.65
Max T/m = 100
 $\alpha = 90^\circ$
R = 0.8


835 mm	11,0 kg
415 mm	4,5 kg
805 mm	11,0 kg
FRAZ. / SECT.	

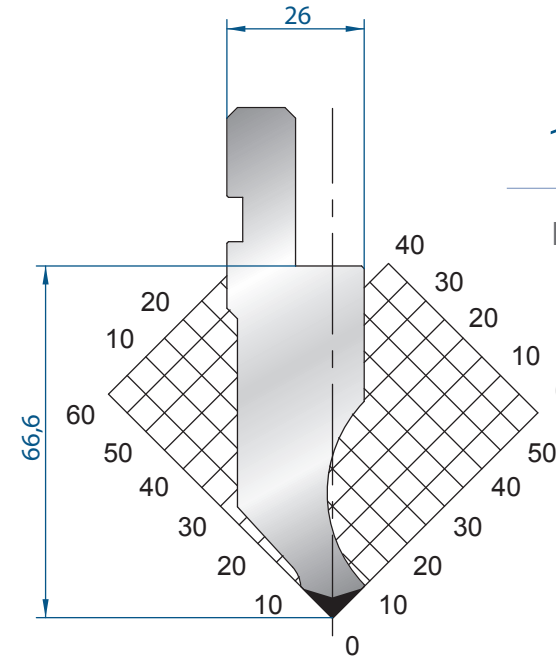

1064

Mat = C45
H = 66.60
Max T/m = 100
 $\alpha = 90^\circ$
R = 0.25


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

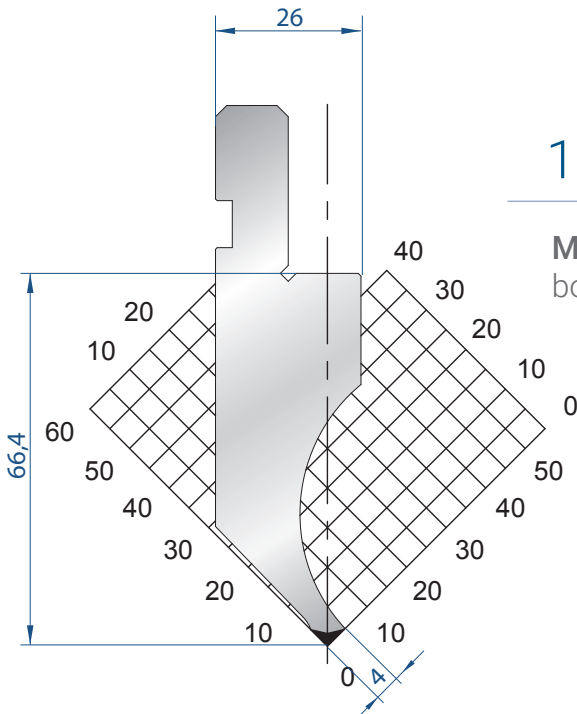

1048

Mat = C45
bonificato / tempered
H = 66.40
Max T/m = 35
 $\alpha = 90^\circ$
R = 0.6

835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	

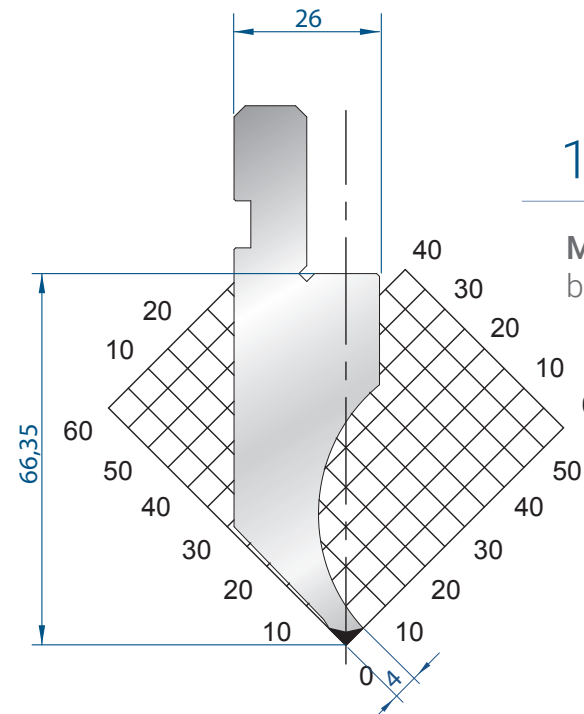


1263

Mat = C45
bonificato / tempered
H = 66.35
Max T/m = 35
 $\alpha = 90^\circ$
R = 0.25

835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	




1080

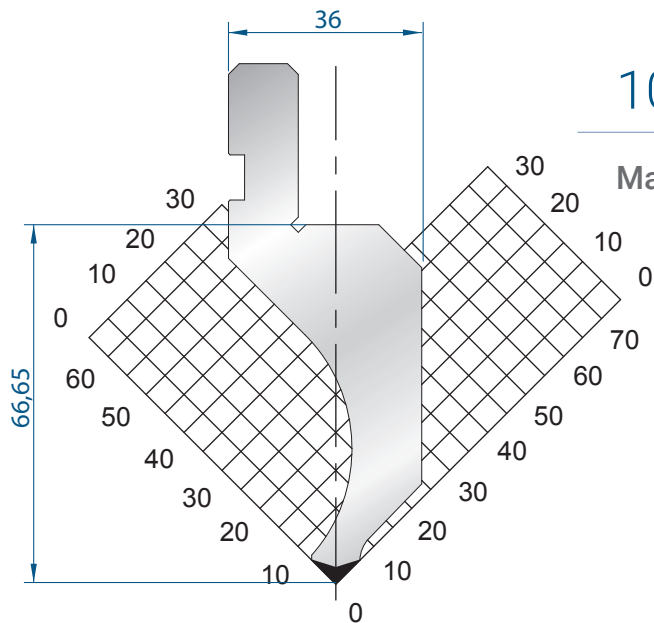

Mat = C45
 H = 66.65
 Max T/m = 60
 $\alpha = 90^\circ$
 R = 0.8

835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	


1028

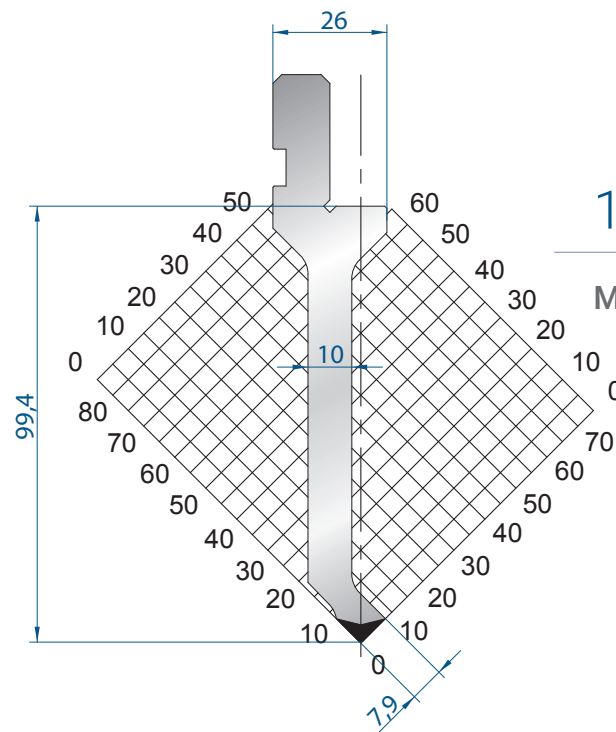

Mat = C45
 H = 99.40
 Max T/m = 50
 $\alpha = 90^\circ$
 R = 0.6

835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	


1261

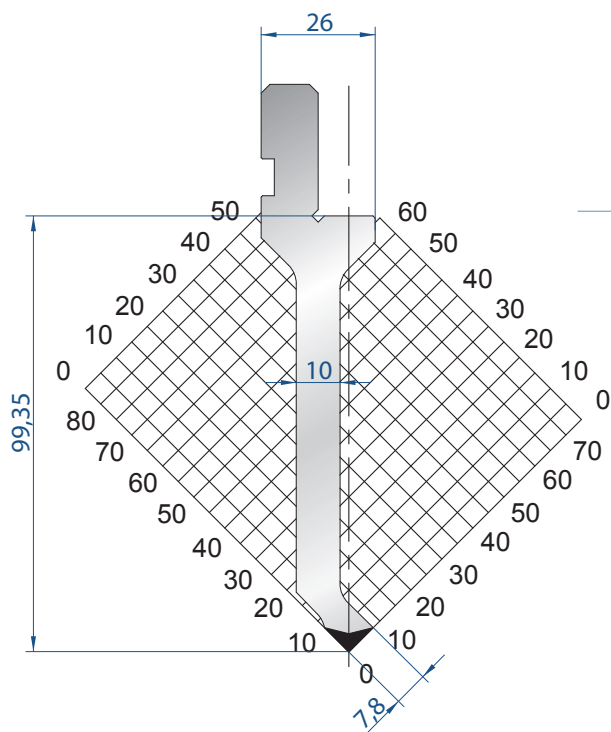

Mat = C45
 H = 99.35
 Max T/m = 50
 $\alpha = 90^\circ$
 R = 0.25


835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	

1019

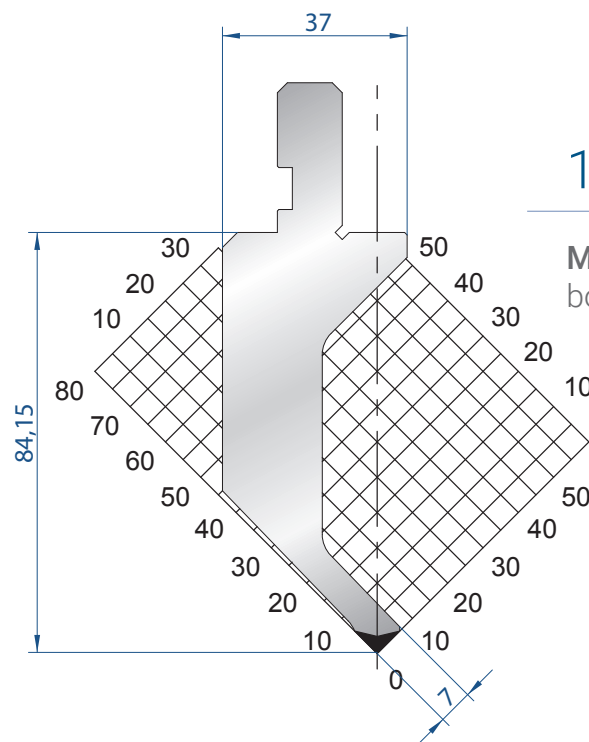

Mat = 42CrMo4
 bonificato / tempered
 H = 84.15
 Max T/m = 20
 $\alpha = 90^\circ$
 R = 0.6


835 mm	14,0 kg
415 mm	7,0 kg
805 mm	14,0 kg
FRAZ. / SECT.	

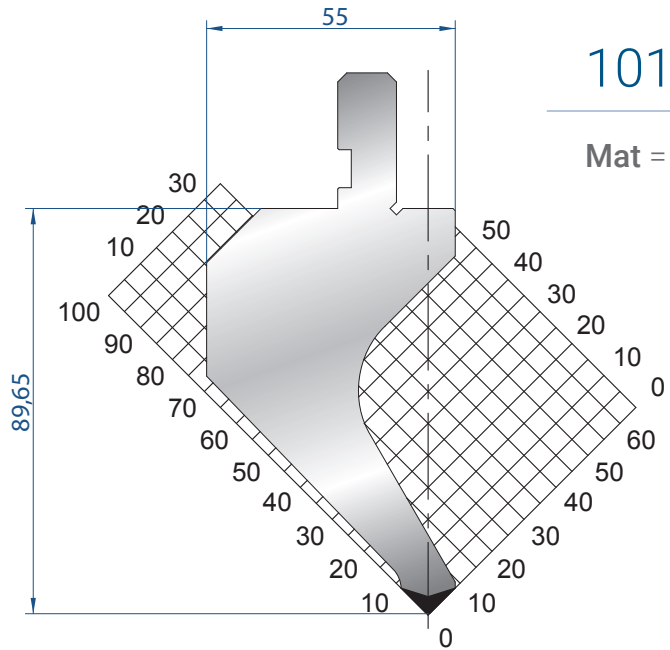

1013

Mat = C45
H = 89.65
Max T/m = 60
 $\alpha = 90^\circ$
R = 0.8


835 mm	21,0 kg
415 mm	10,5 kg
805 mm	21,0 kg
FRAZ. / SECT.	

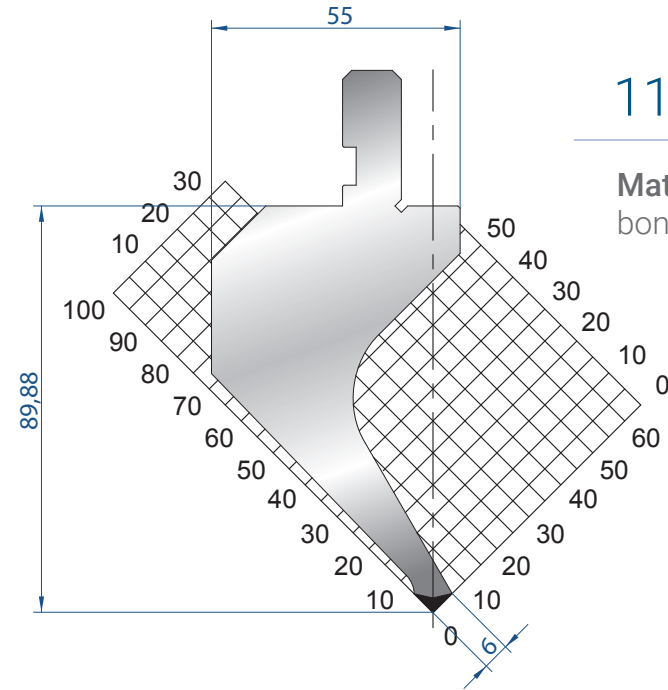

1176

Mat = C45
bonificato / tempered
H = 89.88
Max T/m = 50
 $\alpha = 90^\circ$
R = 0.25


835 mm	21,0 kg
415 mm	10,0 kg
805 mm	21,0 kg
FRAZ. / SECT.	

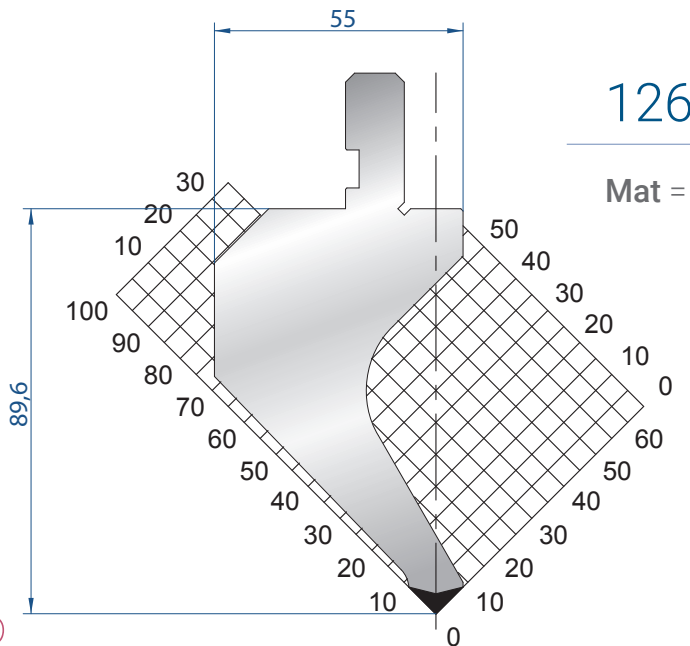

1265

Mat = C45
H = 89.60
Max T/m = 60
 $\alpha = 90^\circ$
R = 0.25

835 mm	19,0 kg
415 mm	9,0 kg
805 mm	19,0 kg
FRAZ. / SECT.	

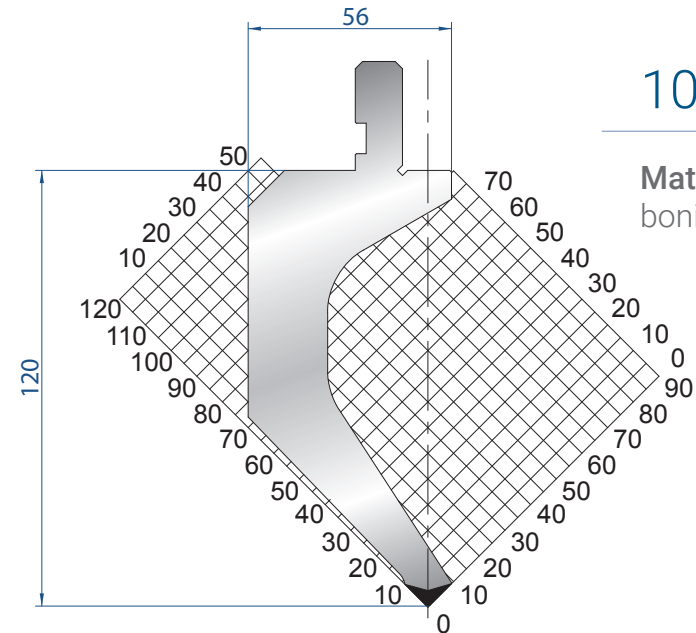


1060

Mat = C45
bonificato / tempered
H = 120.00
Max T/m = 50
 $\alpha = 90^\circ$
R = 0.8

835 mm	24,0 kg
415 mm	12,0 kg
805 mm	24,0 kg
FRAZ. / SECT.	




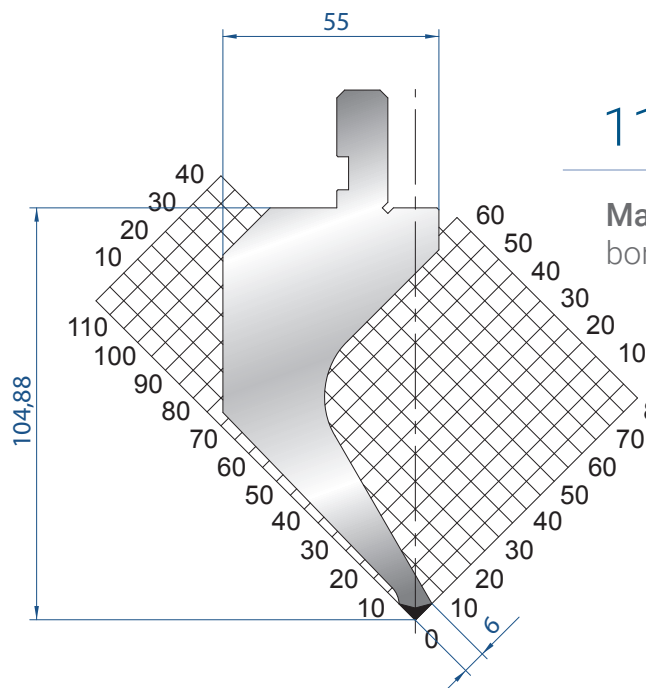

1174

Mat = C45
bonificato / tempered
H = 104.88
Max T/m = 50
 $\alpha = 90^\circ$
R = 0.25


835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	

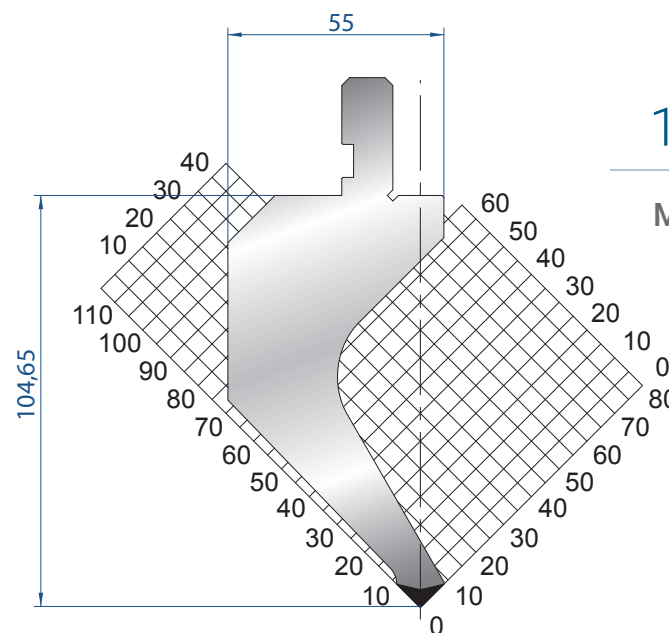

1016

Mat = C45
H = 104.65
Max T/m = 50
 $\alpha = 90^\circ$
R = 0.8


835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	

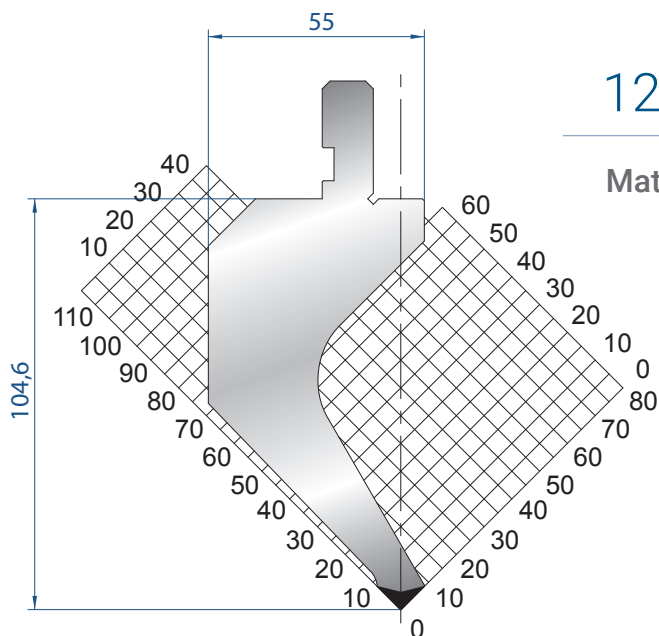

1267

Mat = C45
H = 104.60
Max T/m = 50
 $\alpha = 90^\circ$
R = 0.25


835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	

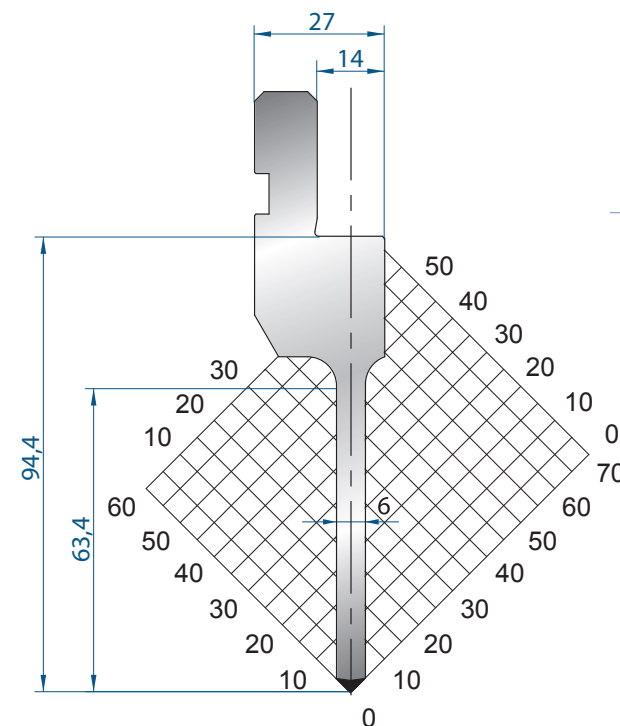

1083

Mat = C45
bonificato / tempered
H = 94.40
Max T/m = 50
 $\alpha = 90^\circ$
R = 0.6


835 mm	8,0 kg
415 mm	4,0 kg
805 mm	8,0 kg
FRAZ. / SECT.	

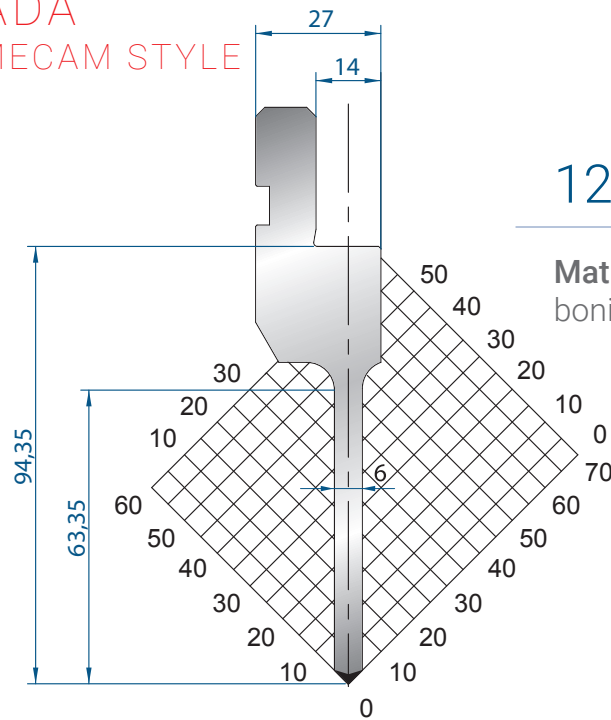

1269

Mat = C45
bonificato / tempered
H = 94.35
Max T/m = 50
 $\alpha = 90^\circ$
R = 0.25

835 mm	8,0k g
415 mm	4,0k g
805 mm FRAZ. / SECT.	8,0k g

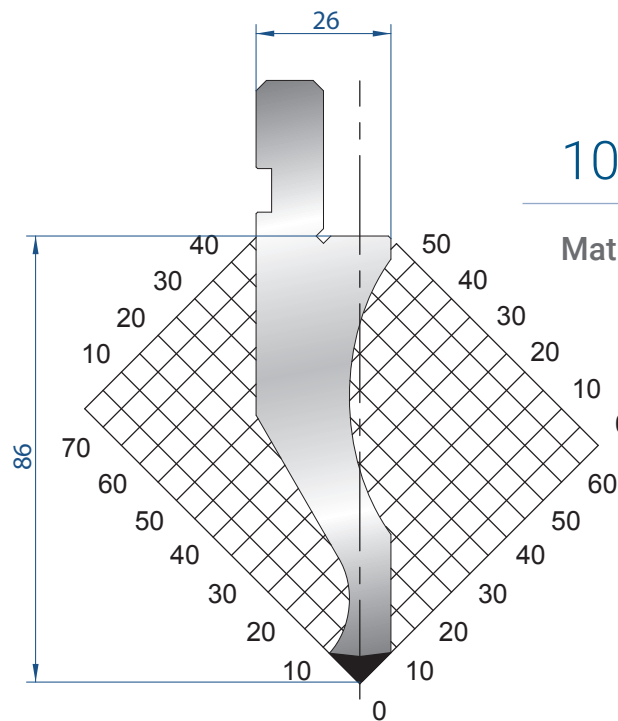

1021

Mat = C45
H = 86.00
Max T/m = 100
 $\alpha = 90^\circ$
R = 0.8

835 mm	13,0 kg
415 mm	6,0k g
805 mm FRAZ. / SECT.	13,0 kg

