
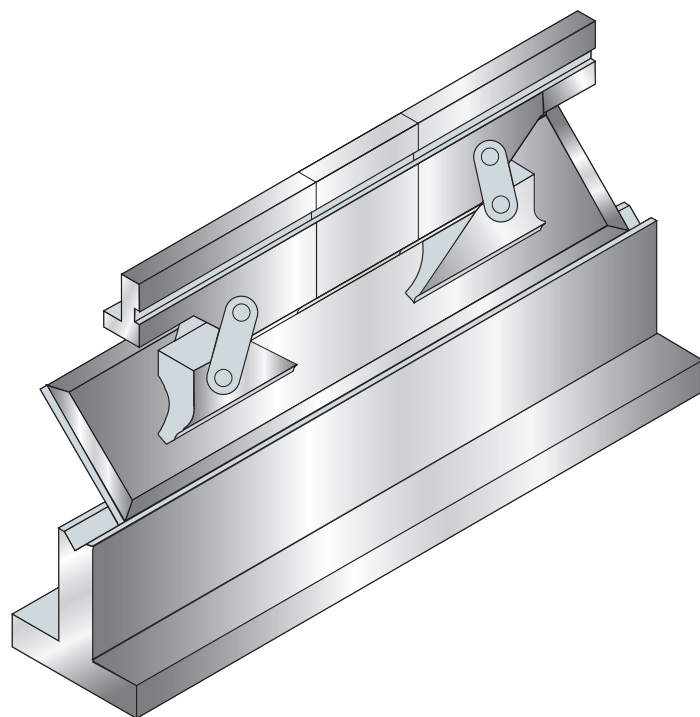
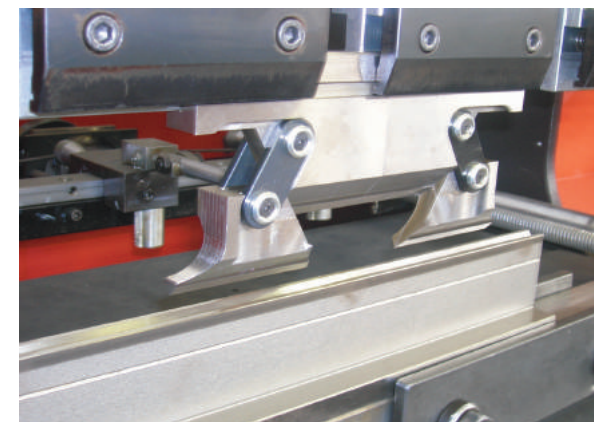
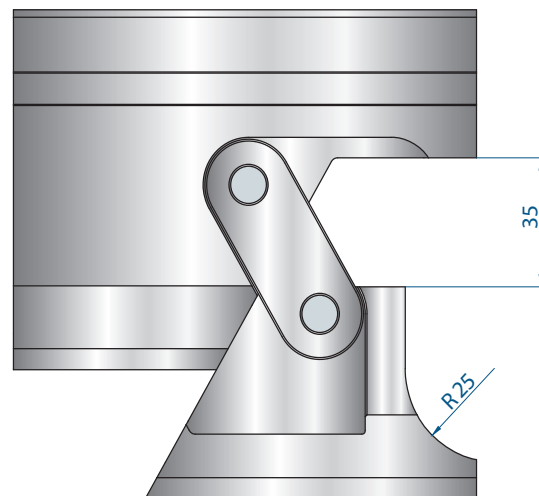


SCARPETTE MOBILI / MOVING HORNS

AMADA
PROMECAM STYLE

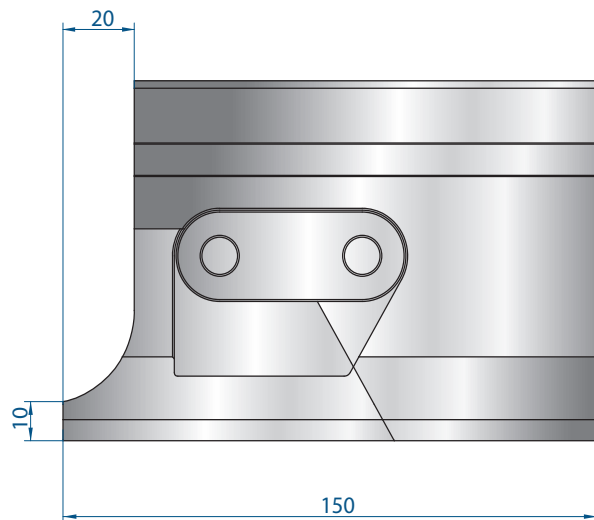

PUNZONE SCARPETTE MOBILI PUNCH MOVING HORNS


1010	1010S
2x150	833,00 € 3,5 kg

1011	1011S
2x150	808,00 € 3,5 kg

1064	1064S
2x150	833,00 € 3,5 kg

1065	1065S
2x150	808,00 € 3,5 kg


1047	1047S
2x150	1.366,00 € 4,0 kg

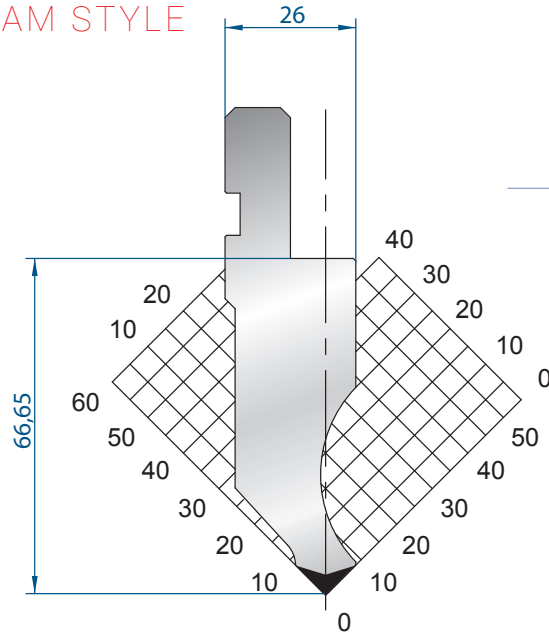

1010

Mat = C45
H = 66.65
Max T/m = 100
 $\alpha = 90^\circ$
R = 0.8


835 mm	11,0 kg
415 mm	4,5 kg
805 mm	11,0 kg
FRAZ. / SECT.	

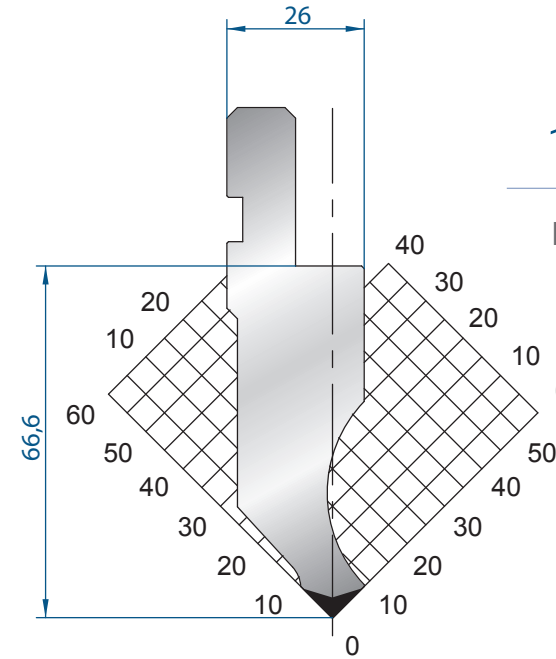

1064

Mat = C45
H = 66.60
Max T/m = 100
 $\alpha = 90^\circ$
R = 0.25


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

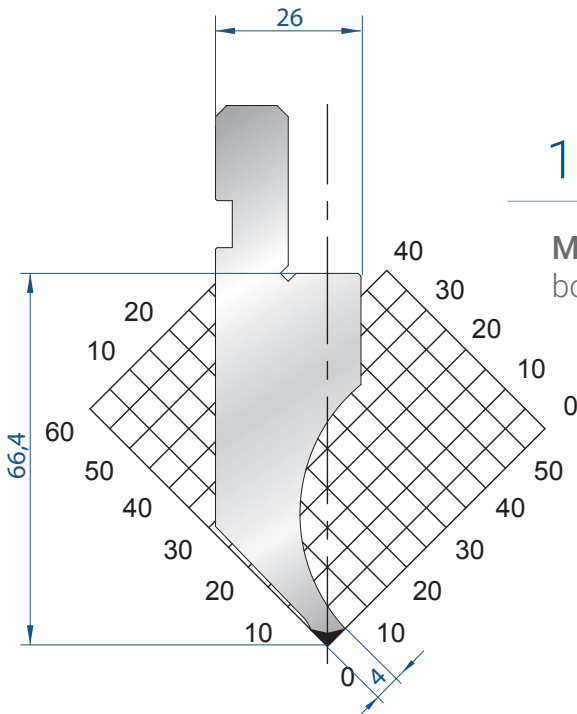

1048

Mat = C45
bonificato / tempered
H = 66.40
Max T/m = 35
 $\alpha = 90^\circ$
R = 0.6

835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	

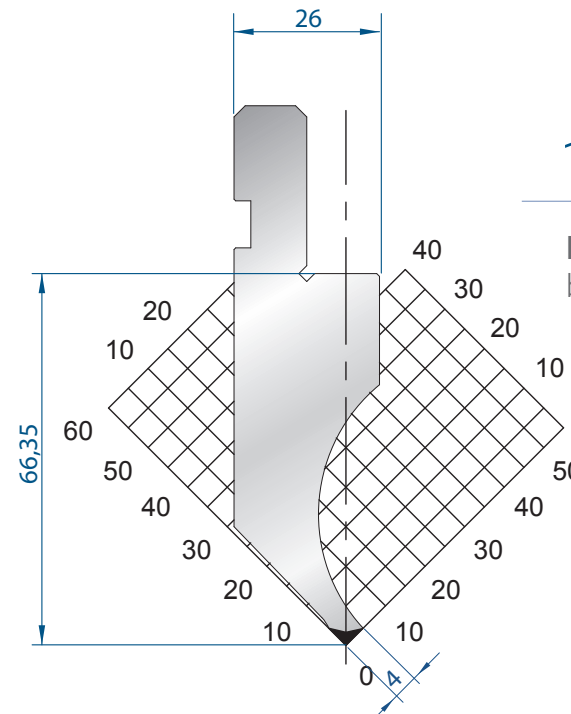


1263

Mat = C45
bonificato / tempered
H = 66.35
Max T/m = 35
 $\alpha = 90^\circ$
R = 0.25

835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	




1080

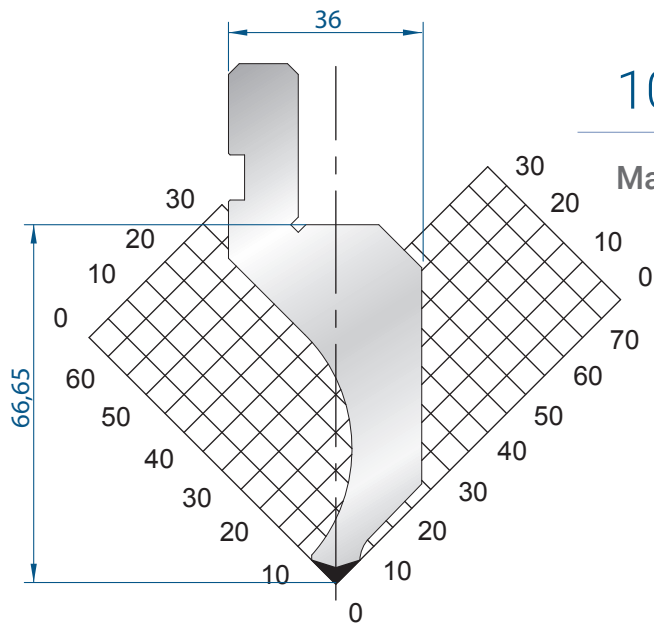

Mat = C45
 H = 66.65
 Max T/m = 60
 $\alpha = 90^\circ$
 R = 0.8

835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	


1028

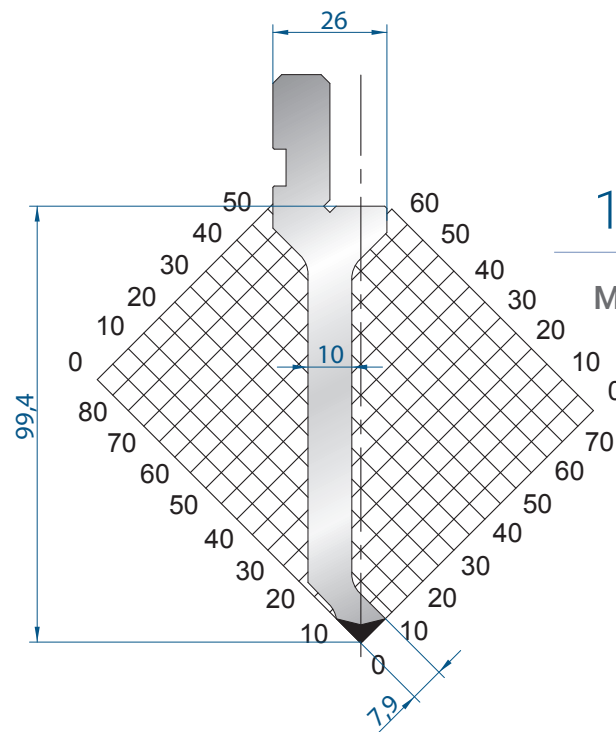

Mat = C45
 H = 99.40
 Max T/m = 50
 $\alpha = 90^\circ$
 R = 0.6

835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	


1261

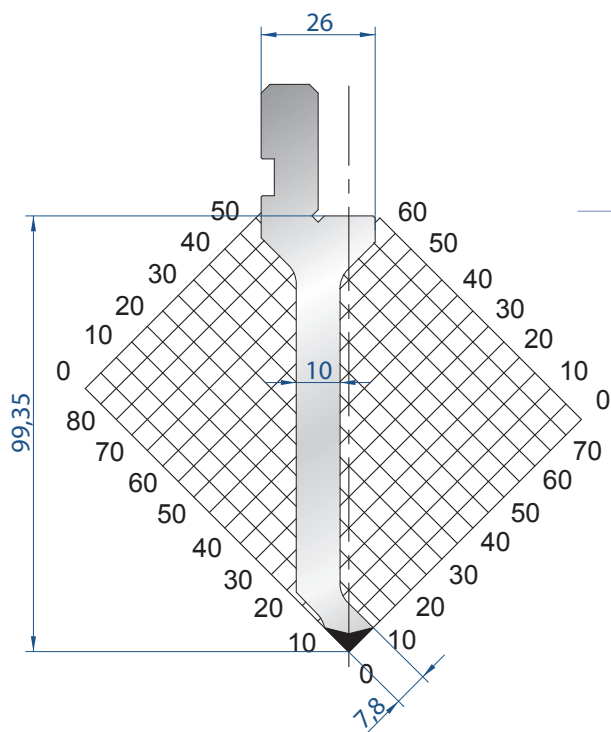

Mat = C45
 H = 99.35
 Max T/m = 50
 $\alpha = 90^\circ$
 R = 0.25


835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	

1019

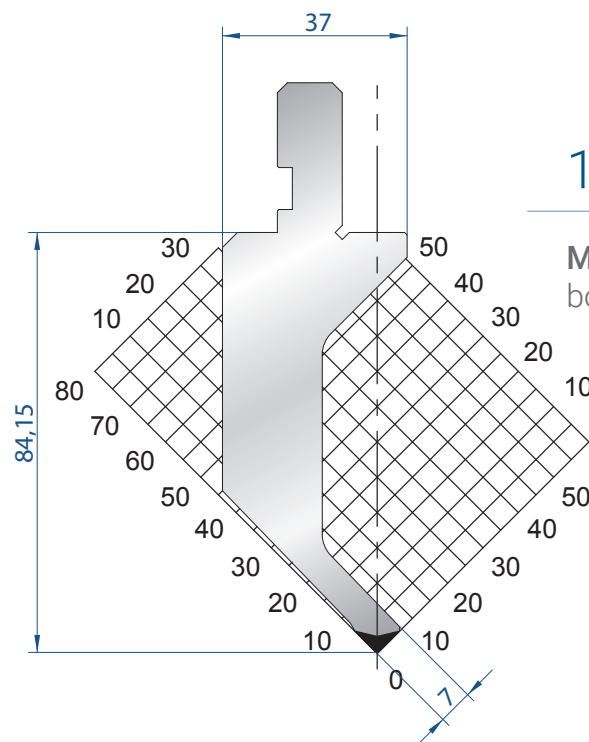

Mat = 42CrMo4
 bonificato / tempered
 H = 84.15
 Max T/m = 20
 $\alpha = 90^\circ$
 R = 0.6


835 mm	14,0 kg
415 mm	7,0 kg
805 mm	14,0 kg
FRAZ. / SECT.	

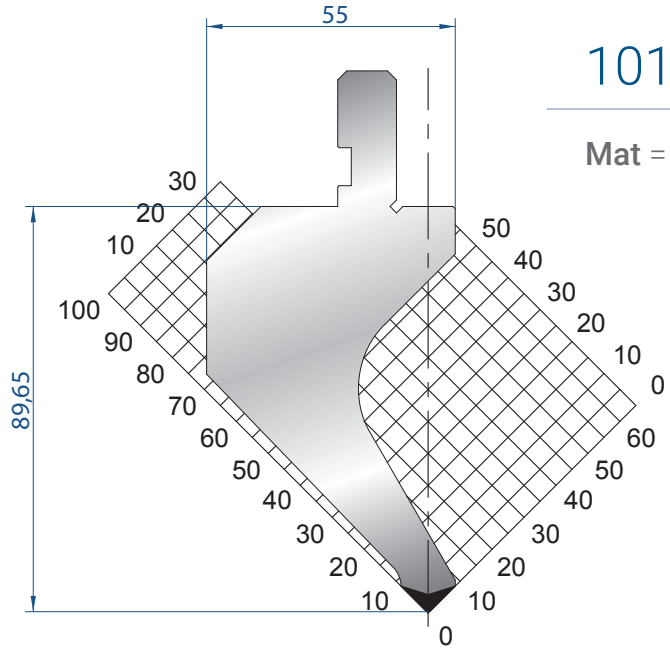

1013

Mat = C45
H = 89.65
Max T/m = 60
 $\alpha = 90^\circ$
R = 0.8


835 mm	21,0 kg
415 mm	10,5 kg
805 mm	21,0 kg
FRAZ. / SECT.	

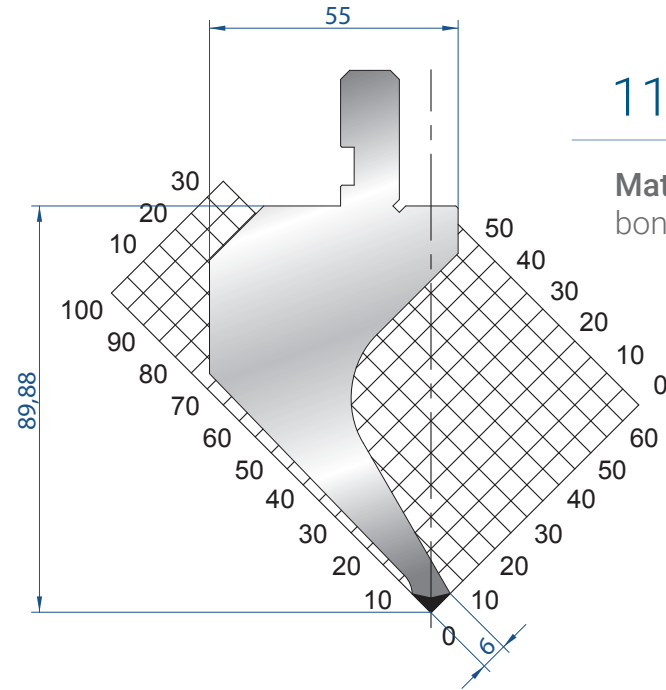

1176

Mat = C45
bonificato / tempered
H = 89.88
Max T/m = 50
 $\alpha = 90^\circ$
R = 0.25


835 mm	21,0 kg
415 mm	10,0 kg
805 mm	21,0 kg
FRAZ. / SECT.	

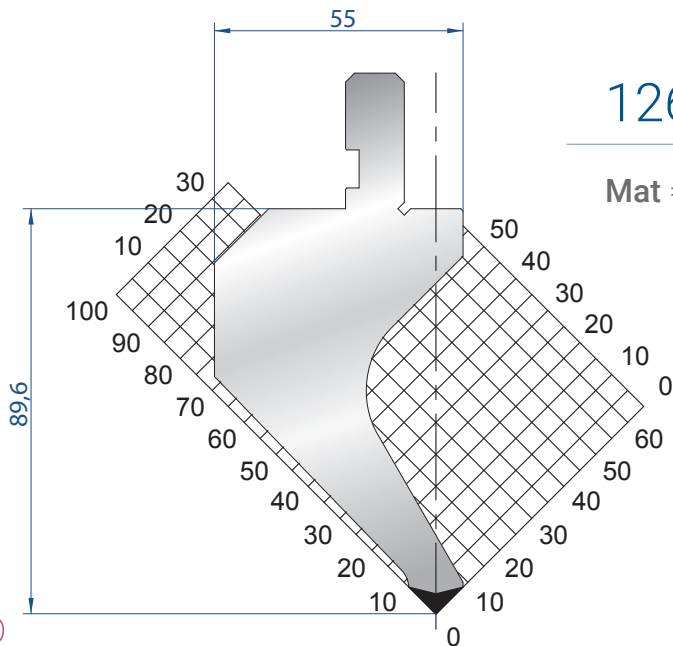

1265

Mat = C45
H = 89.60
Max T/m = 60
 $\alpha = 90^\circ$
R = 0.25

835 mm	19,0 kg
415 mm	9,0 kg
805 mm	19,0 kg
FRAZ. / SECT.	

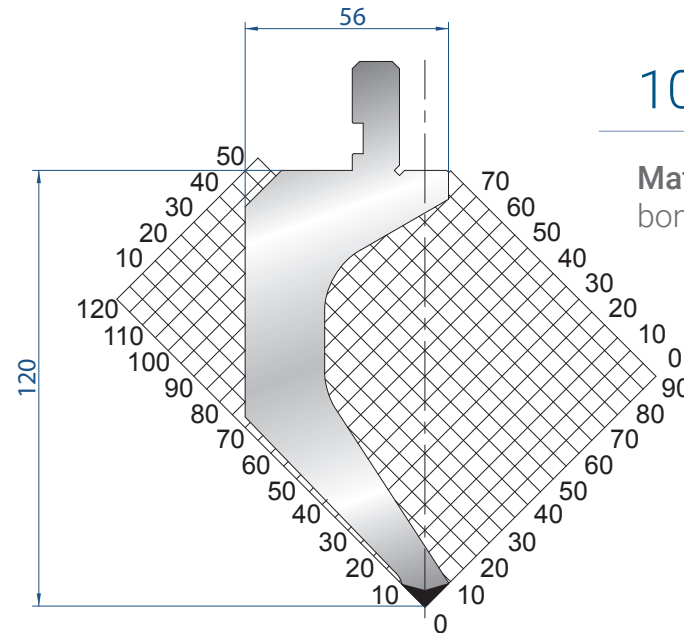


1060

Mat = C45
bonificato / tempered
H = 120.00
Max T/m = 50
 $\alpha = 90^\circ$
R = 0.8

835 mm	24,0 kg
415 mm	12,0 kg
805 mm	24,0 kg
FRAZ. / SECT.	




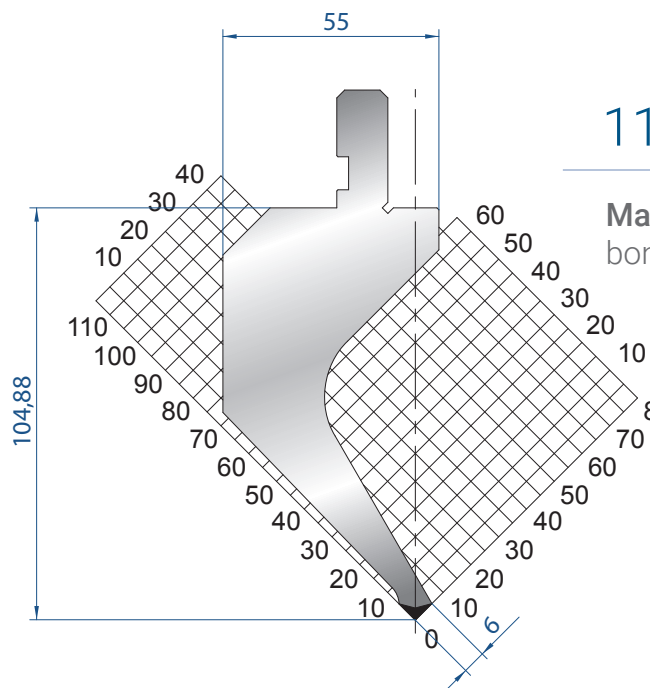

1174

Mat = C45
bonificato / tempered
H = 104.88
Max T/m = 50
 $\alpha = 90^\circ$
R = 0.25


835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	

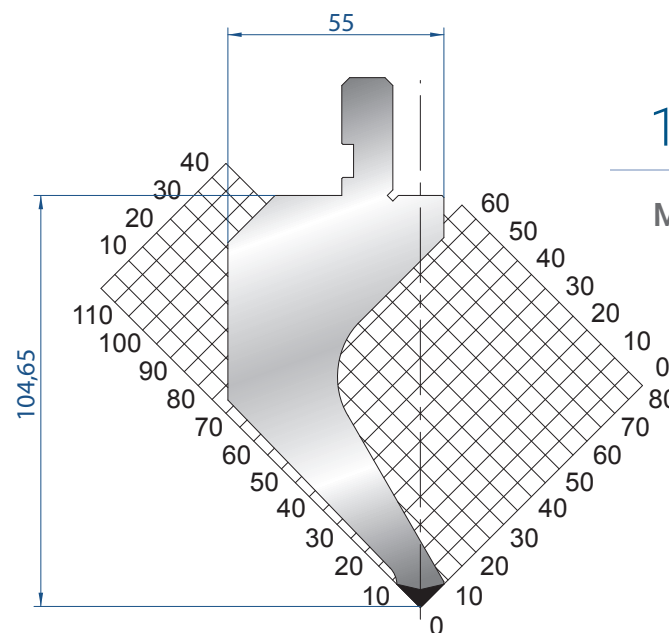

1016

Mat = C45
H = 104.65
Max T/m = 50
 $\alpha = 90^\circ$
R = 0.8


835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	

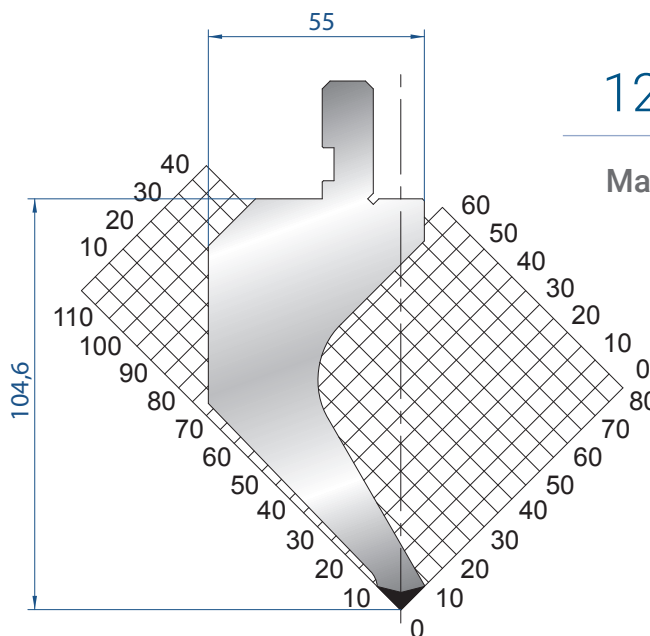

1267

Mat = C45
H = 104.60
Max T/m = 50
 $\alpha = 90^\circ$
R = 0.25


835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	

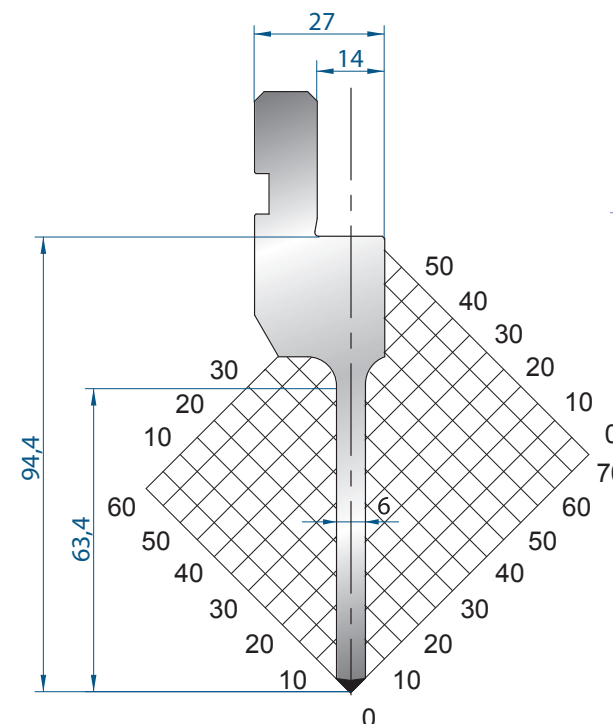

1083

Mat = C45
bonificato / tempered
H = 94.40
Max T/m = 50
 $\alpha = 90^\circ$
R = 0.6


835 mm	8,0 kg
415 mm	4,0 kg
805 mm	8,0 kg
FRAZ. / SECT.	

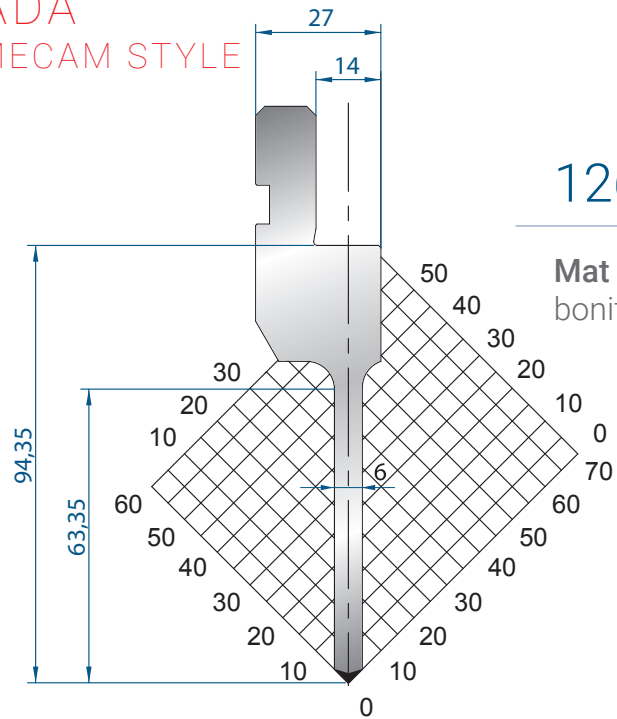

1269

Mat = C45
bonificato / tempered
H = 94.35
Max T/m = 50
 $\alpha = 90^\circ$
R = 0.25


835 mm	8,0k g
415 mm	4,0k g
805 mm FRAZ. / SECT.	8,0k g

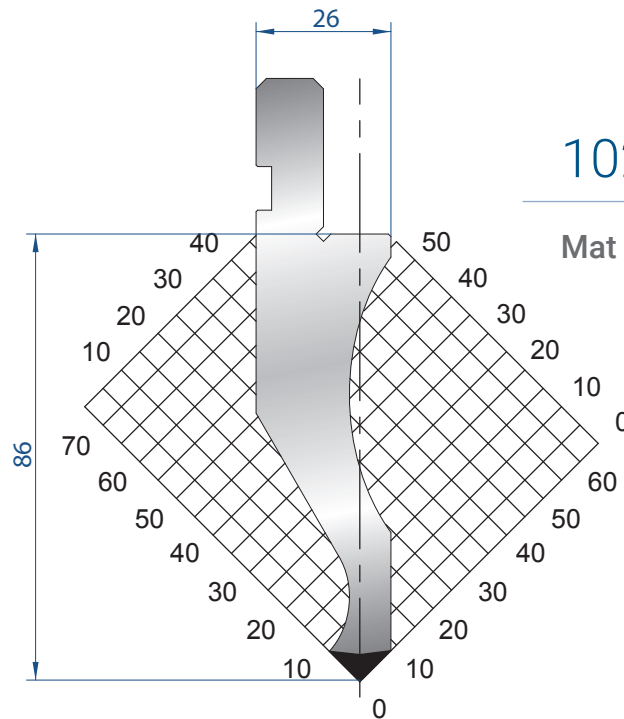


1021

Mat = C45
H = 86.00
Max T/m = 100
 $\alpha = 90^\circ$
R = 0.8

835 mm	13,0 kg
415 mm	6,0k g
805 mm FRAZ. / SECT.	13,0 kg

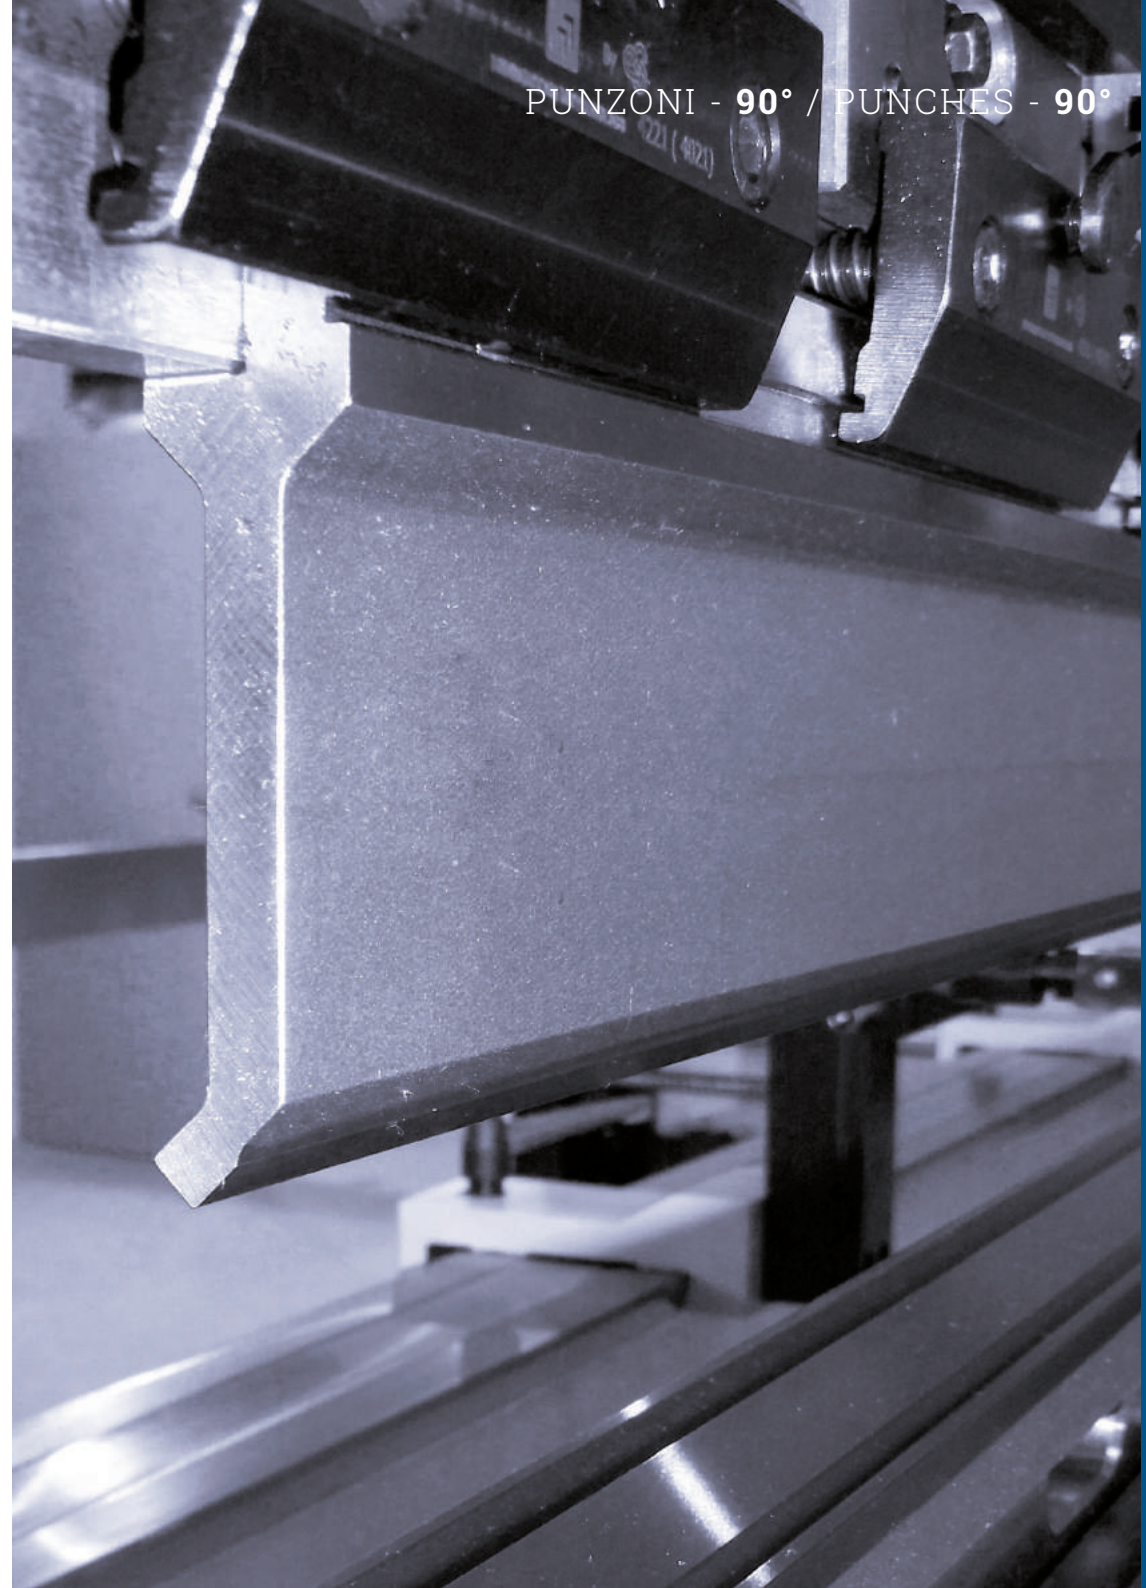


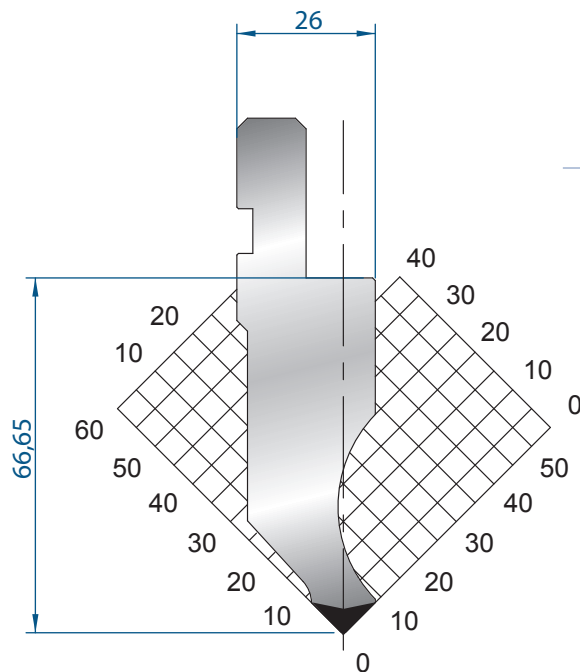

1011

Mat = C45
 H = 66.65
 Max T/m = 100
 $\alpha = 88^\circ$
 R = 0.8


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

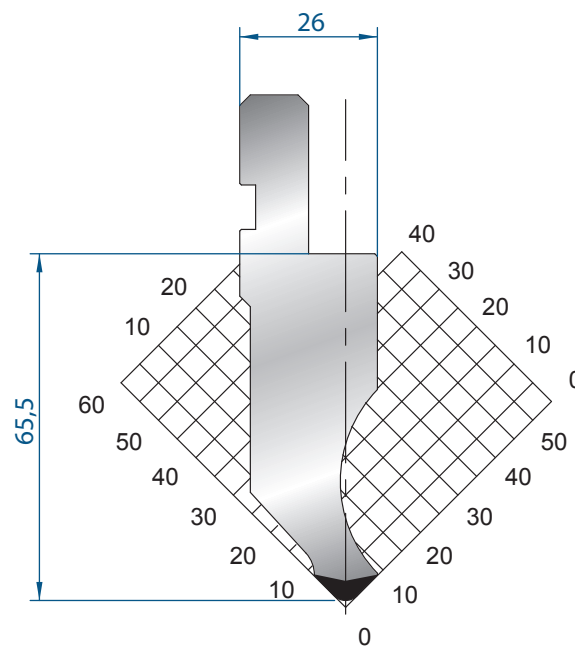

1012

Mat = C45
 H = 65.50
 Max T/m = 100
 $\alpha = 88^\circ$
 R = 3


835 mm	11,0 kg
415 mm	4,5 kg
805 mm	11,0 kg
FRAZ. / SECT.	

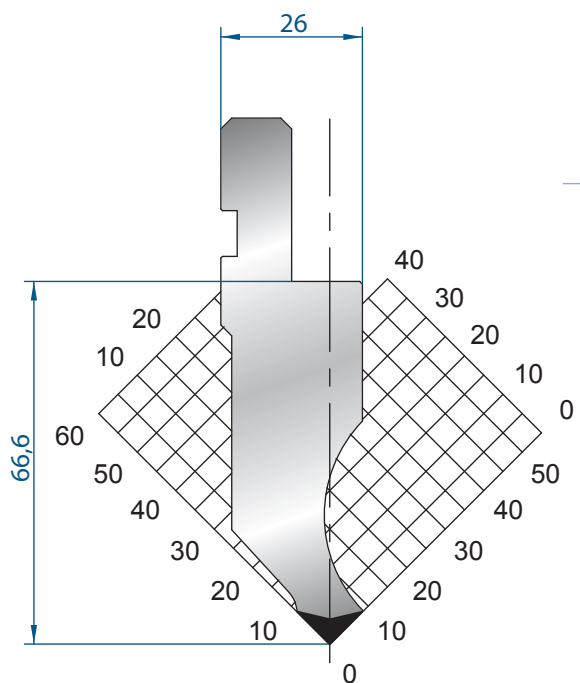

1065

Mat = C45
 H = 66.60
 Max T/m = 100
 $\alpha = 88^\circ$
 R = 0.25


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

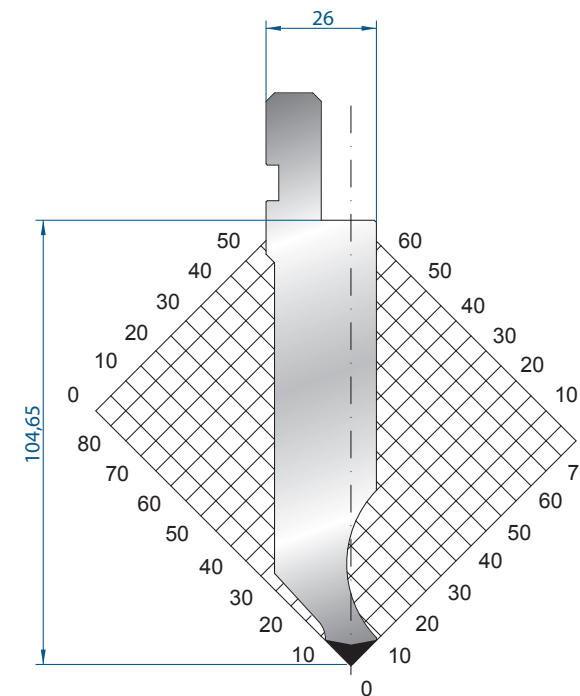

1063

Mat = C45
 H = 104.65
 Max T/m = 100
 $\alpha = 88^\circ$
 R = 0.8


835 mm	17,0 kg
415 mm	9,0 kg
805 mm	17,0 kg
FRAZ. / SECT.	

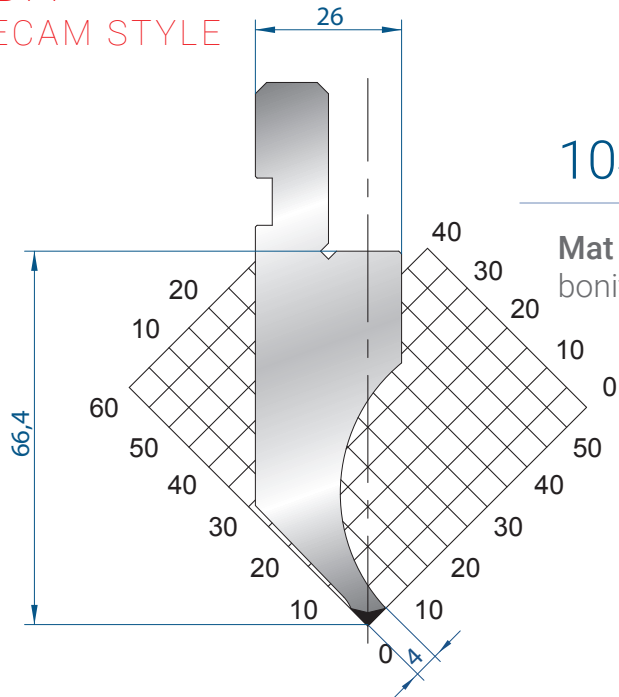

1049

Mat = C45
bonificato / tempered
H = 66.40
Max T/m = 35
 $\alpha = 88^\circ$
R = 0.6


835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	

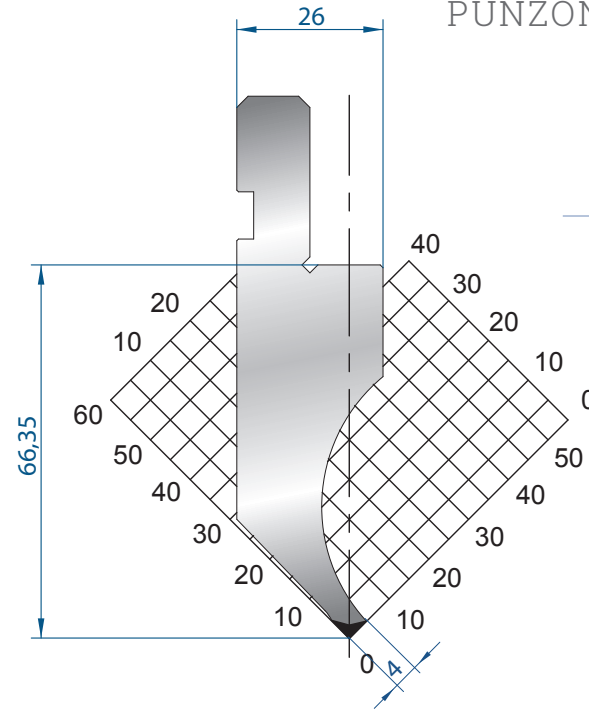

1264

Mat = C45
bonificato / tempered
H = 66.35
Max T/m = 35
 $\alpha = 88^\circ$
R = 0.25


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

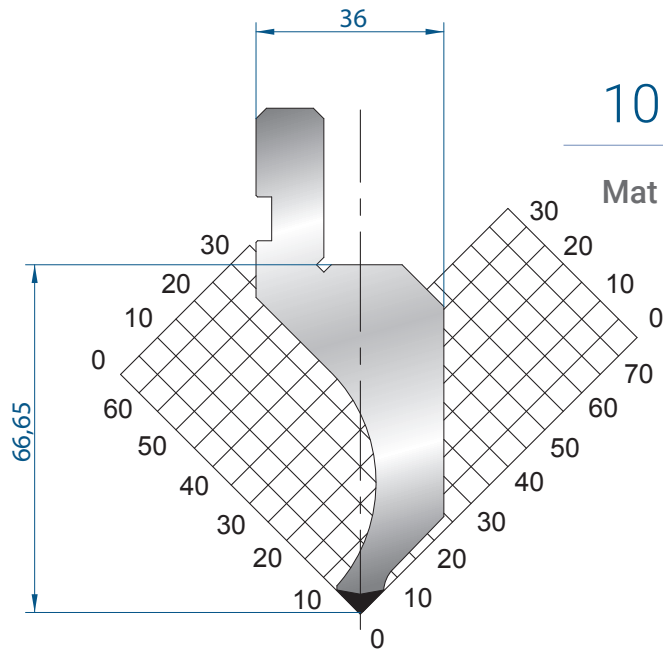

1081

Mat = C45
H = 66.65
Max T/m = 60
 $\alpha = 88^\circ$
R = 0.8

835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	

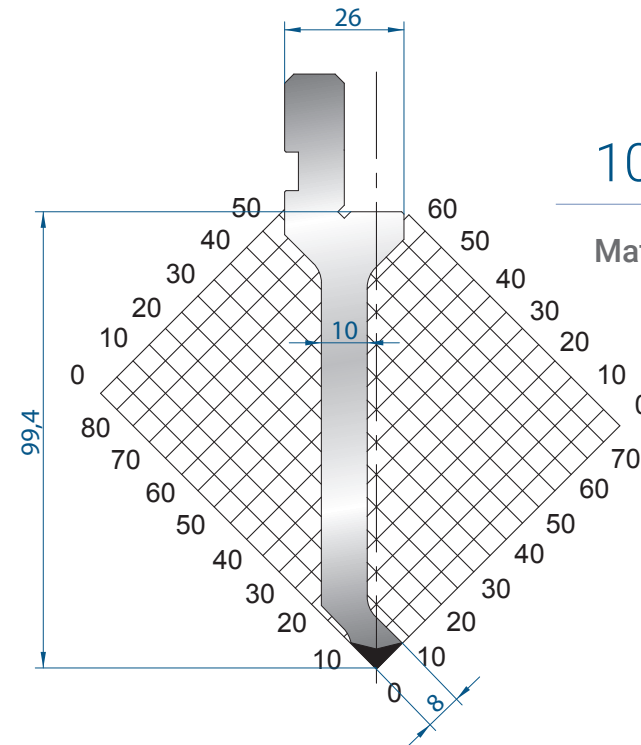



1029

Mat = C45
H = 99.40
Max T/m = 50
 $\alpha = 88^\circ$
R = 0.6

835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	



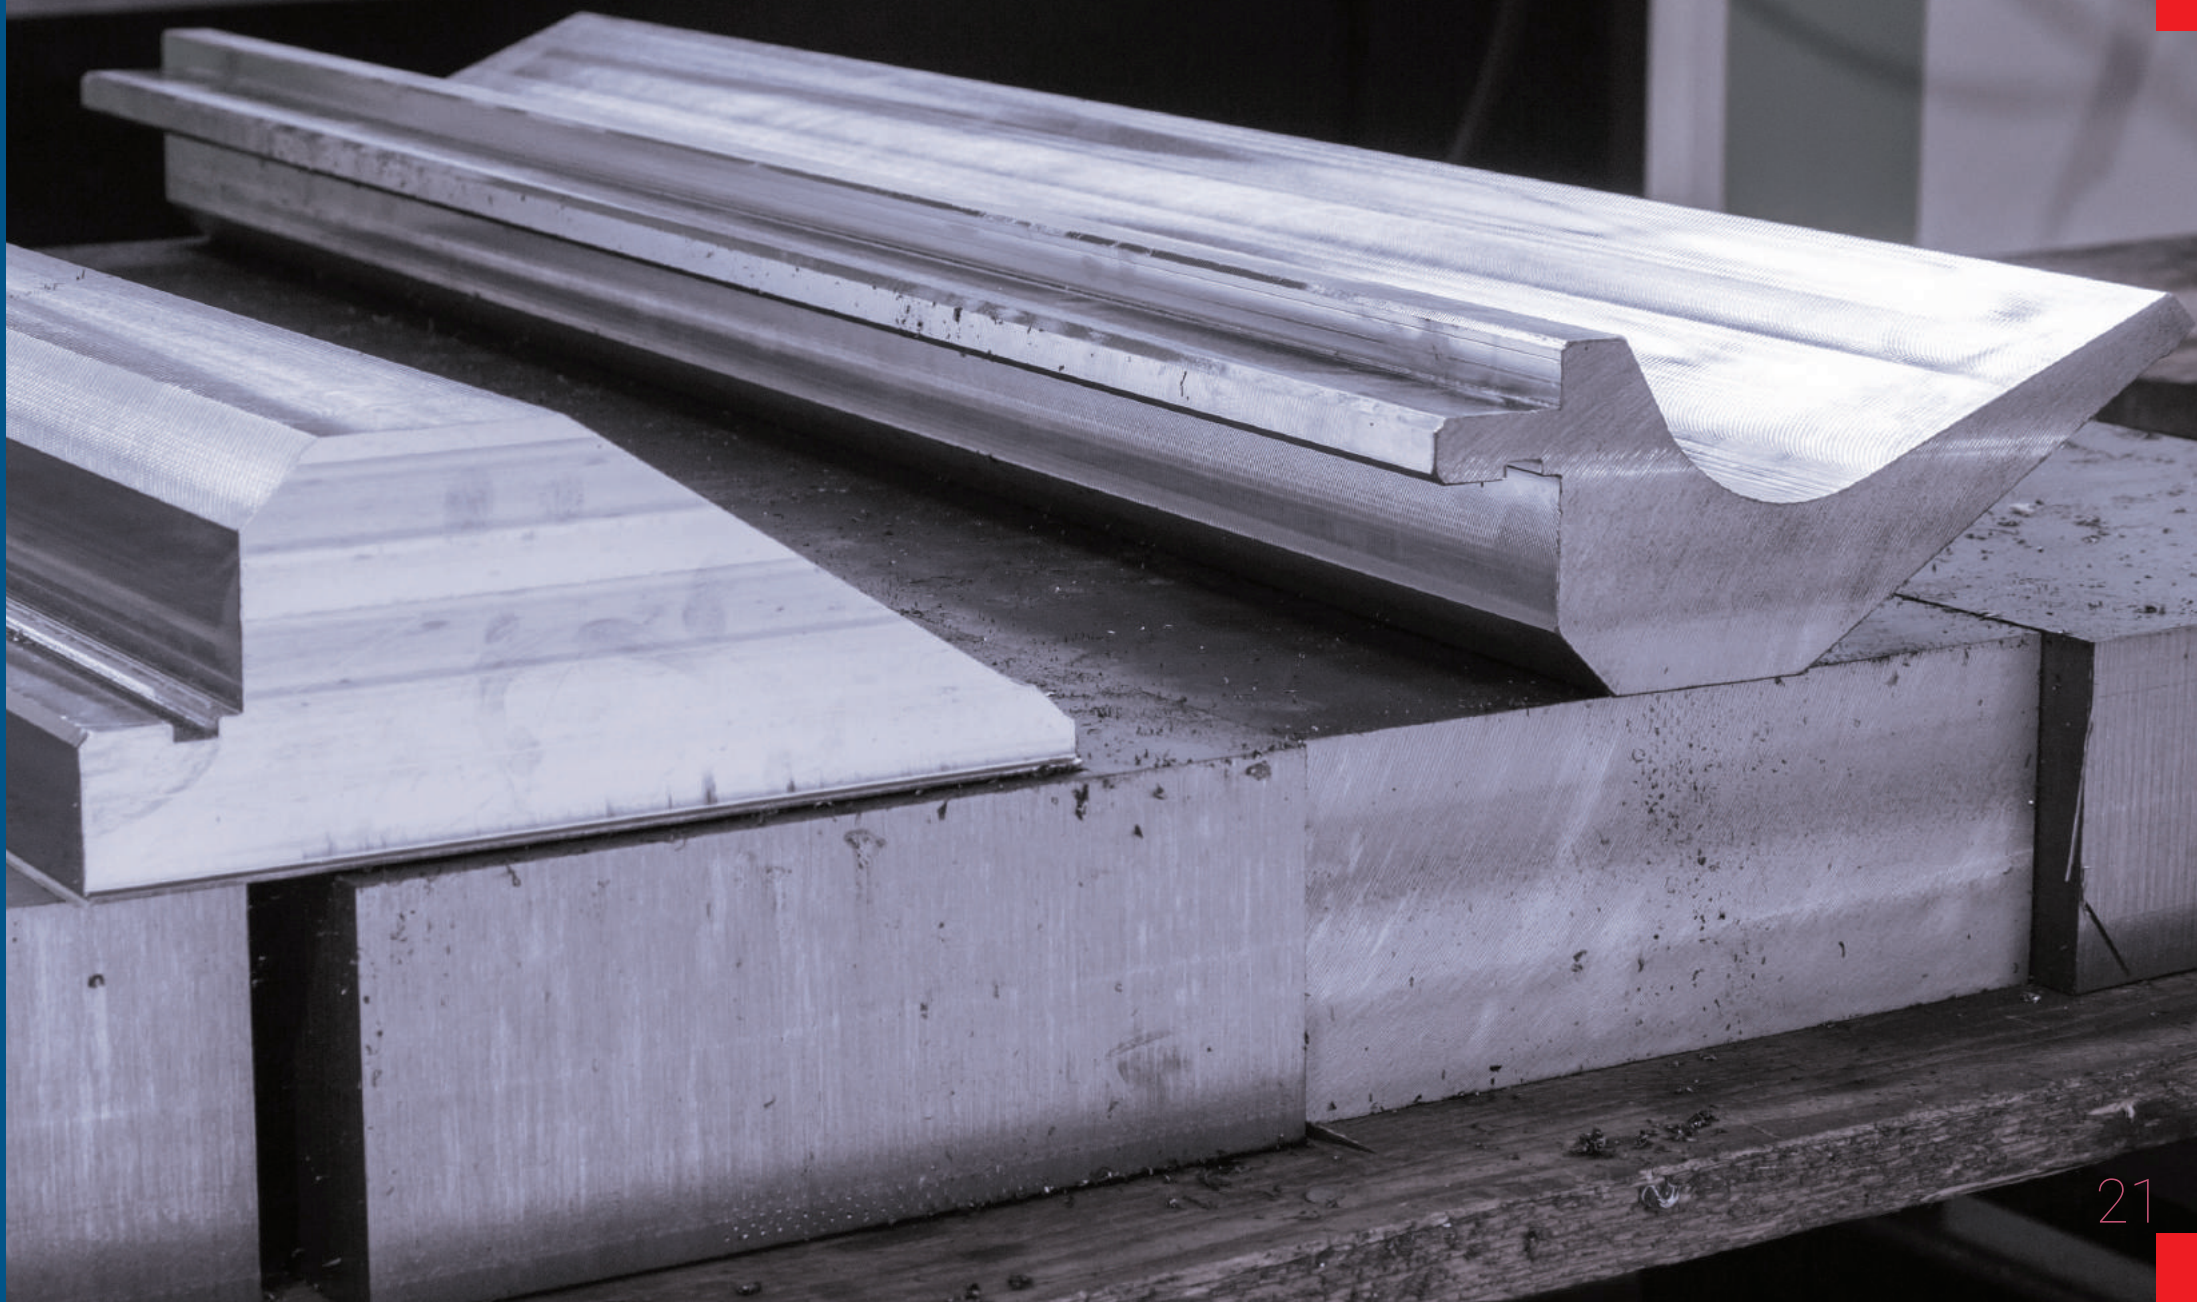


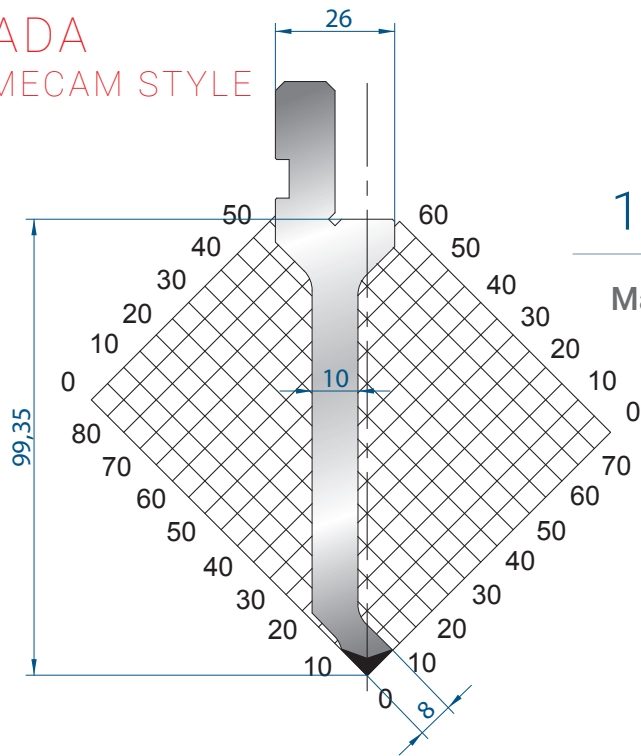

1262

Mat = C45
H = 99.35
Max T/m = 50
 $\alpha = 88^\circ$
R = 0.25


835 mm	9,0 kg
415 mm	4,0 kg
805 mm	9,0 kg
FRAZ. / SECT.	

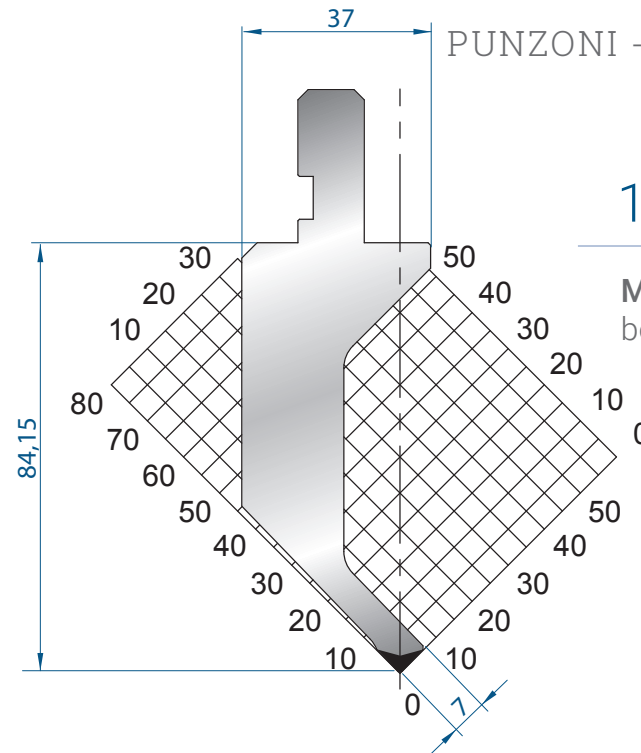

1020

Mat = 42CrMo4
bonificato / tempered
H = 84.15
Max T/m = 20
 $\alpha = 88^\circ$
R = 0.6


835 mm	14,0 kg
415 mm	7,0 kg
805 mm	14,0 kg
FRAZ. / SECT.	

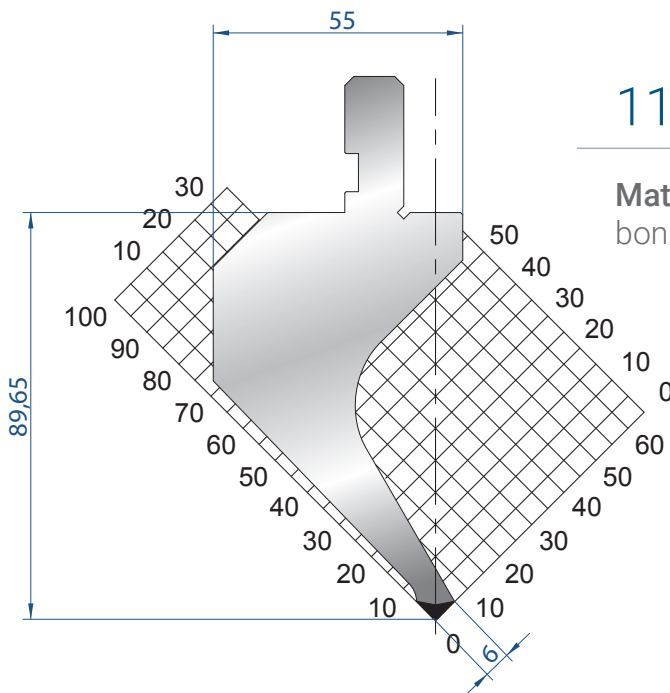

1175

Mat = C45
bonificato / tempered
H = 89.65
Max T/m = 50
 $\alpha = 88^\circ$
R = 0.8

835 mm	21,0 kg
415 mm	10,0 kg
805 mm	21,0 kg
FRAZ. / SECT.	

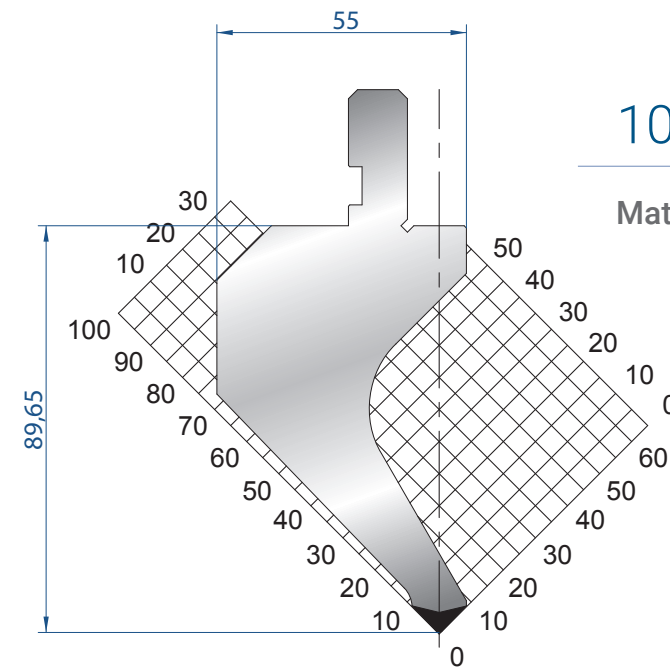


1014

Mat = C45
H = 89.65
Max T/m = 60
 $\alpha = 88^\circ$
R = 0.8

835 mm	21,0 kg
415 mm	10,5 kg
805 mm	21,0 kg
FRAZ. / SECT.	




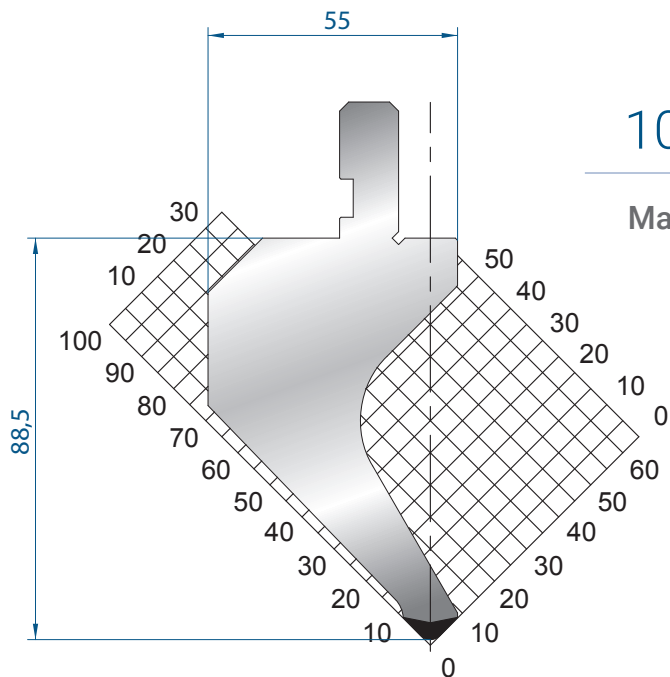

1015

Mat = C45
H = 88.50
Max T/m = 60
 $\alpha = 88^\circ$
R = 3


835 mm	21,0 kg
415 mm	10,5 kg
805 mm	21,0 kg
FRAZ. / SECT.	

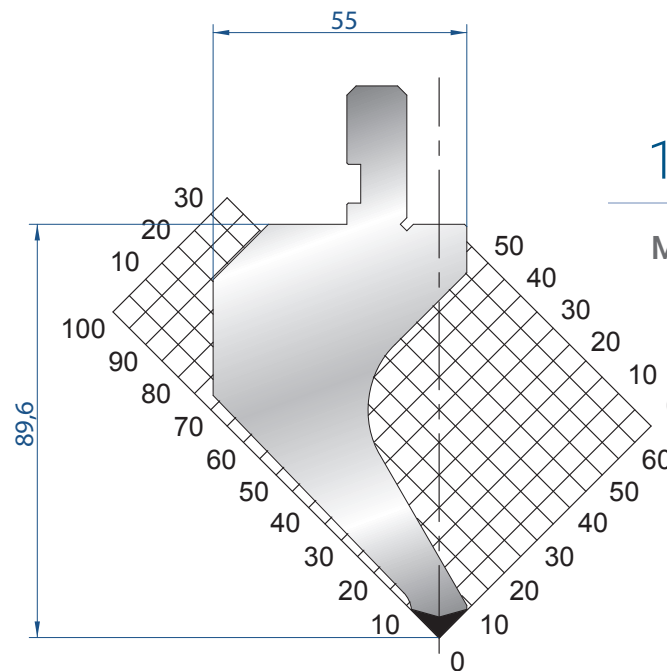

1266

Mat = C45
H = 89.60
Max T/m = 60
 $\alpha = 88^\circ$
R = 0.25


835 mm	21,0 kg
415 mm	10,0 kg
805 mm	21,0 kg
FRAZ. / SECT.	

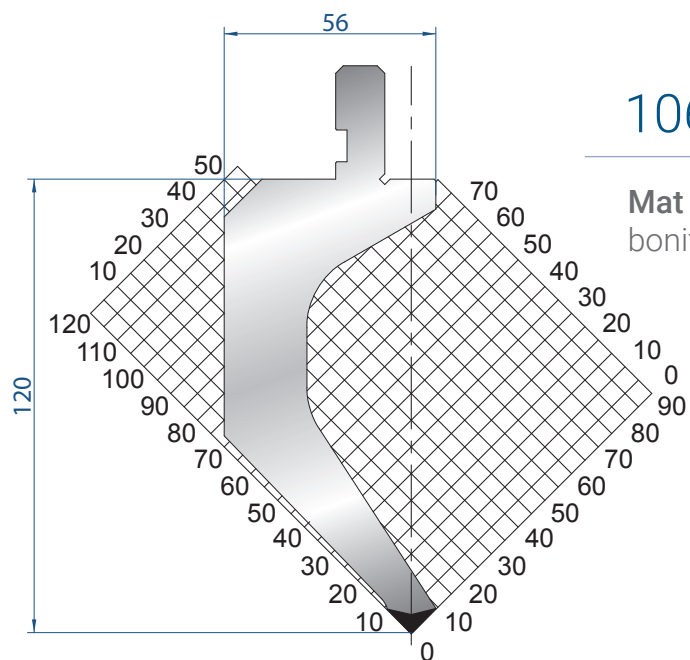

1061

Mat = C45
bonificato / tempered
H = 120.00
Max T/m = 50
 $\alpha = 88^\circ$
R = 0.8


835 mm	24,0 kg
415 mm	12,0 kg
805 mm	24,0 kg
FRAZ. / SECT.	

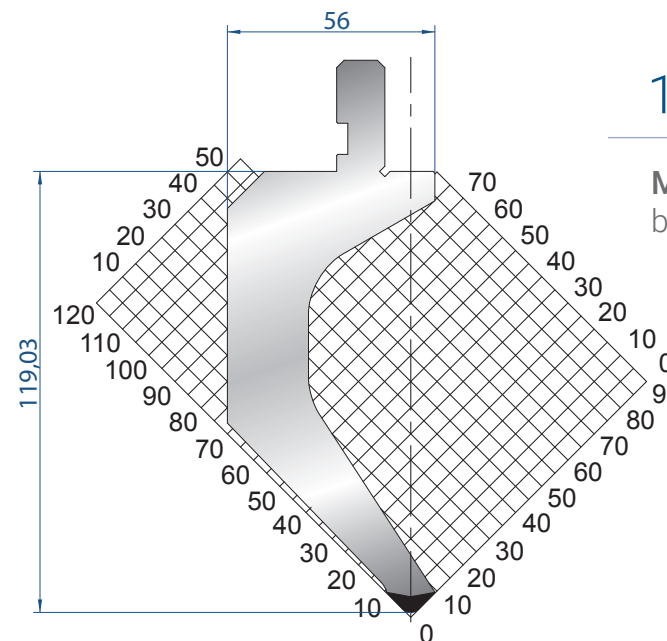

1062

Mat = C45
bonificato / tempered
H = 119.03
Max T/m = 50
 $\alpha = 88^\circ$
R = 3


835 mm	24,0 kg
415 mm	12,0 kg
805 mm	24,0 kg
FRAZ. / SECT.	

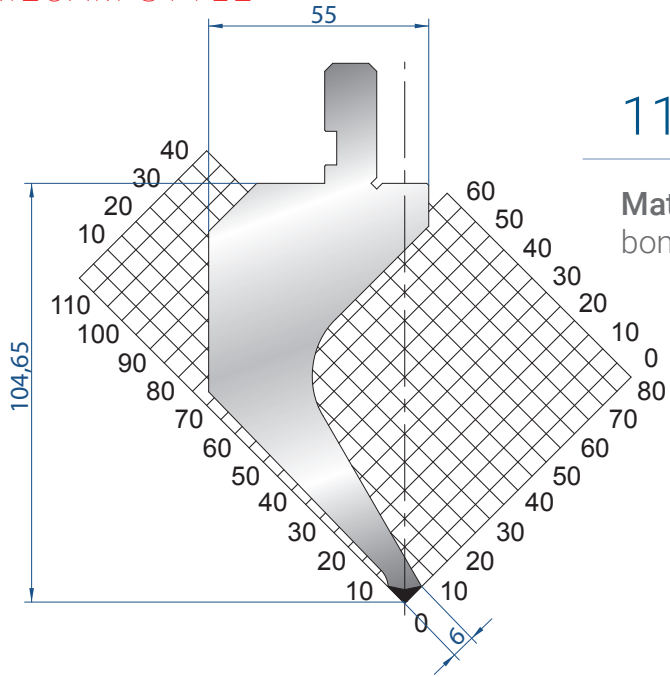

1173

Mat = C45
bonificato / tempered
H = 104.65
Max T/m = 50
 $\alpha = 88^\circ$
R = 0.8


835 mm	23,0 kg
415 mm	11,0 kg
805 mm FRAZ. / SECT.	23,0 kg

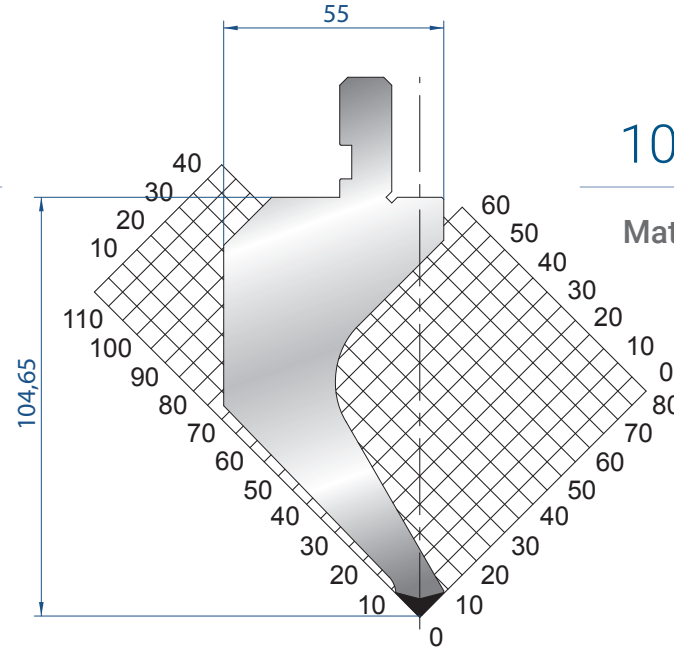

1017

Mat = C45
H = 104.65
Max T/m = 50
 $\alpha = 88^\circ$
R = 0.8


835 mm	23,0 kg
415 mm	11,0 kg
805 mm FRAZ. / SECT.	23,0 kg

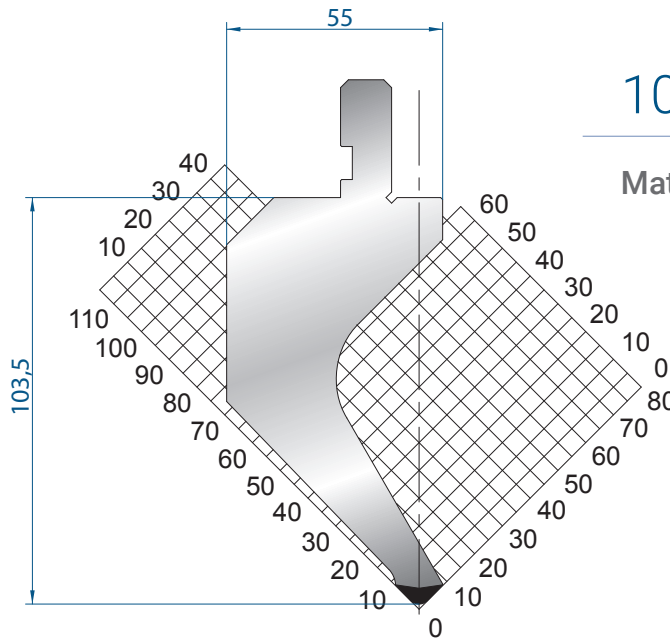

1018

Mat = C45
H = 103.50
Max T/m = 50
 $\alpha = 88^\circ$
R = 3

835 mm	23,0 kg
415 mm	11,0 kg
805 mm FRAZ. / SECT.	23,0 kg

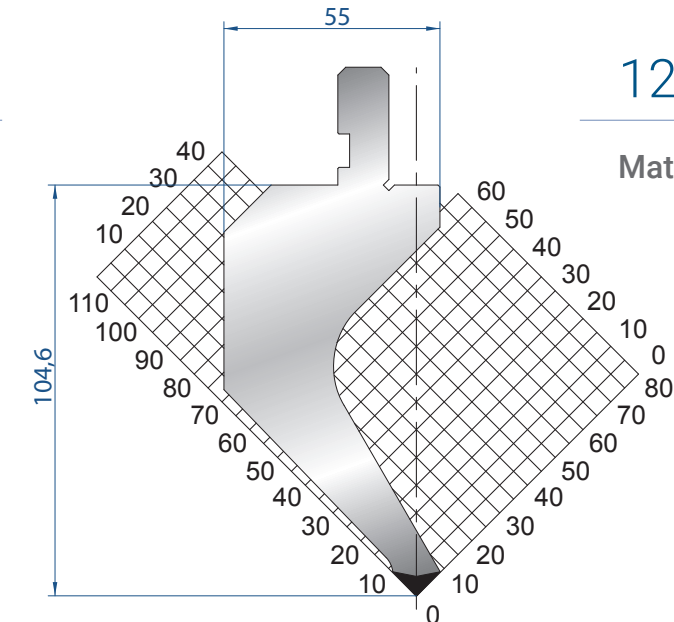


1268

Mat = C45
H = 104.60
Max T/m = 50
 $\alpha = 88^\circ$
R = 0.25

835 mm	23,0 kg
415 mm	11,0 kg
805 mm FRAZ. / SECT.	23,0 kg



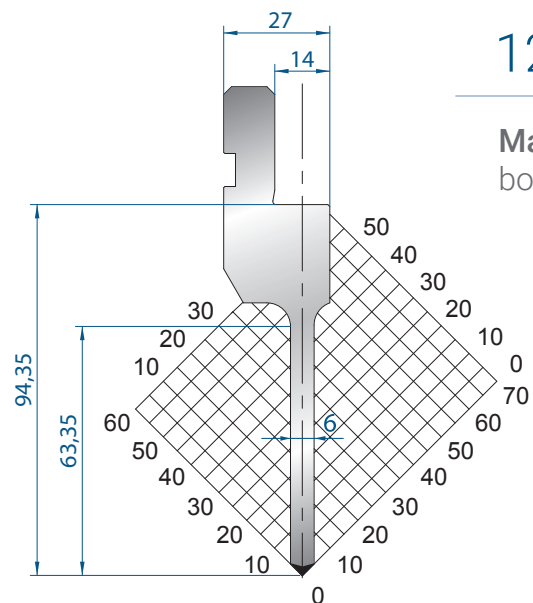


1270

Mat = C45
bonificato / tempered

H = 94.35
Max T/m = 50
 $\alpha = 88^\circ$
R = 0.25


835 mm	8,0 kg
415 mm	4,0 kg
805 mm	8,0 kg
FRAZ. / SECT.	

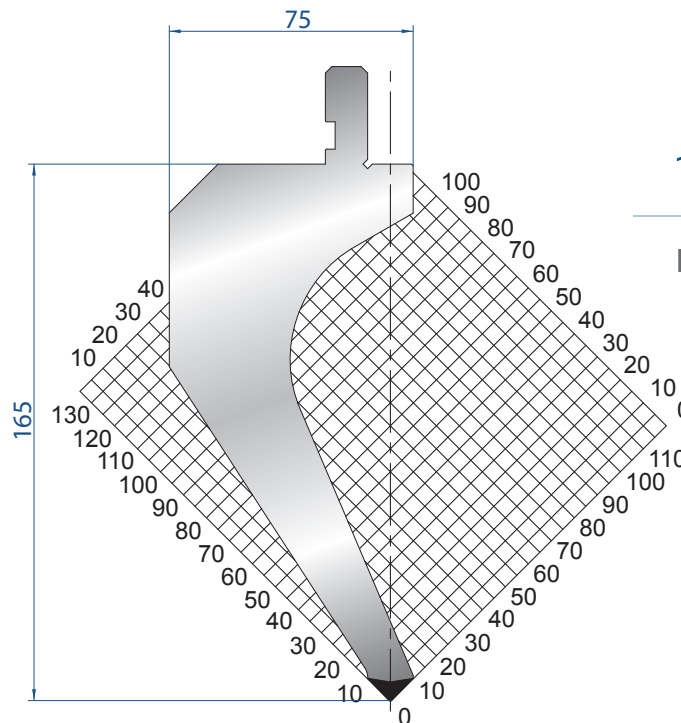

1031

Mat = C45
H = 104.65
Max T/m = 45
 $\alpha = 88^\circ$
R = 0.8

835 mm	41,0 kg
415 mm	20,0 kg
805 mm	41,0 kg
FRAZ. / SECT.	

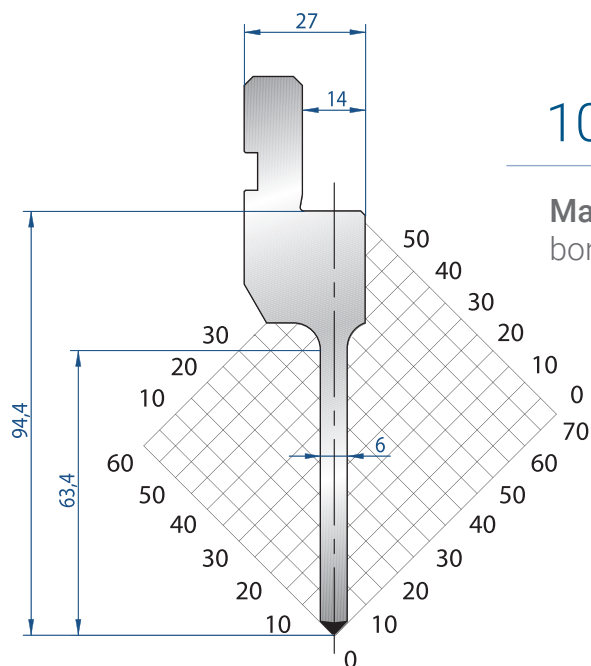


1084

Mat = C45
bonificato / tempered

H = 94.40
Max T/m = 50
 $\alpha = 88^\circ$
R = 0.6


835 mm	8,0 kg
415 mm	4,0 kg
805 mm	8,0 kg
FRAZ. / SECT.	

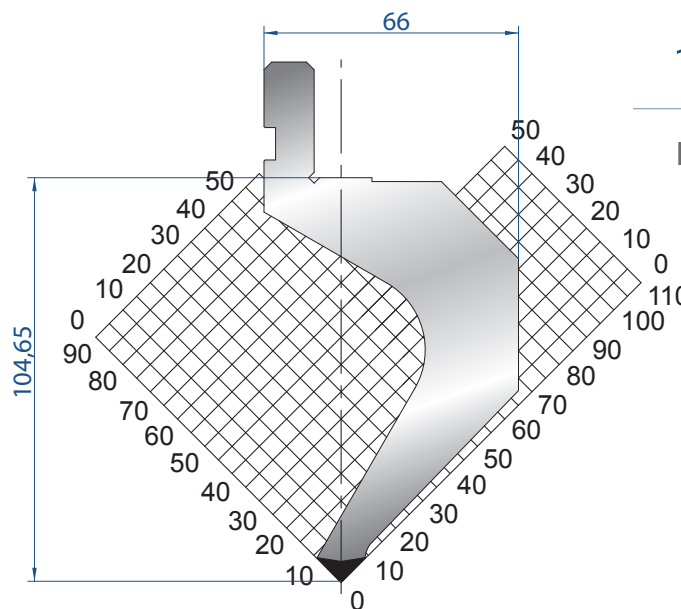

1082

Mat = C45
H = 104.65
Max T/m = 45
 $\alpha = 88^\circ$
R = 0.8


835 mm	25,0 kg
415 mm	12,0 kg
805 mm	25,0 kg
FRAZ. / SECT.	

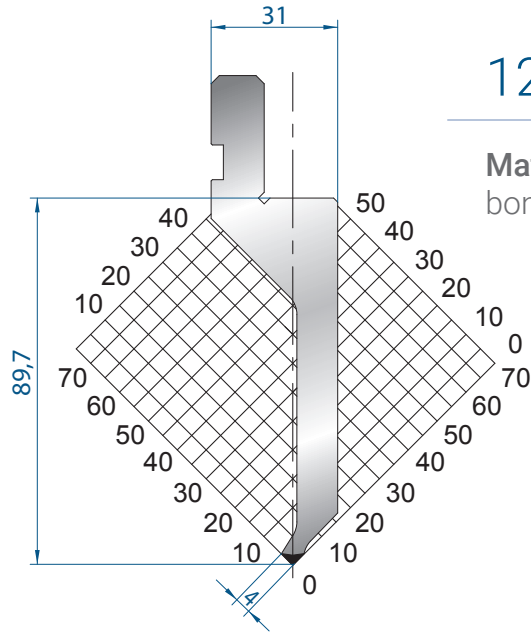

1290

Mat = C45
bonificato / tempered
H = 89.70
Max T/m = 30
 $\alpha = 88^\circ$
R = 0.6


835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	

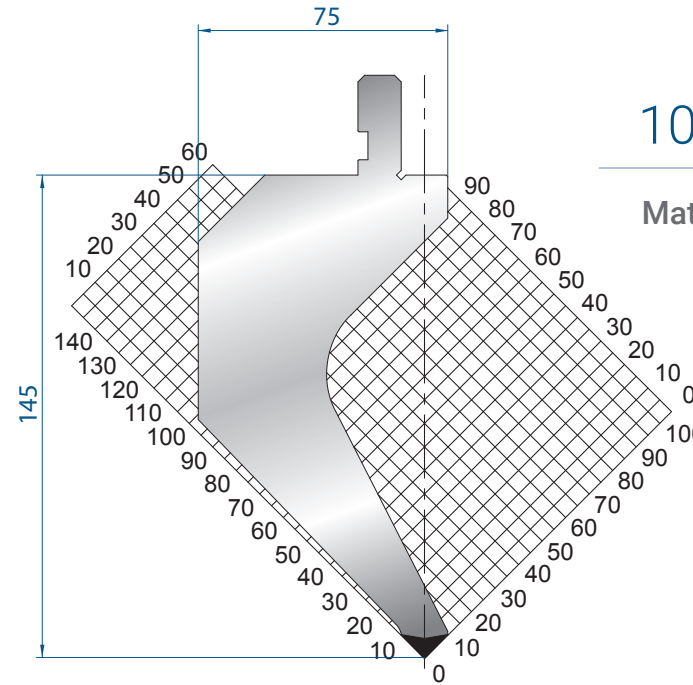

1030

Mat = C45
H = 145.00
Max T/m = 80
 $\alpha = 88^\circ$
R = 0.8


835 mm	39,0 kg
415 mm	19,0 kg
805 mm	39,0 kg
FRAZ. / SECT.	

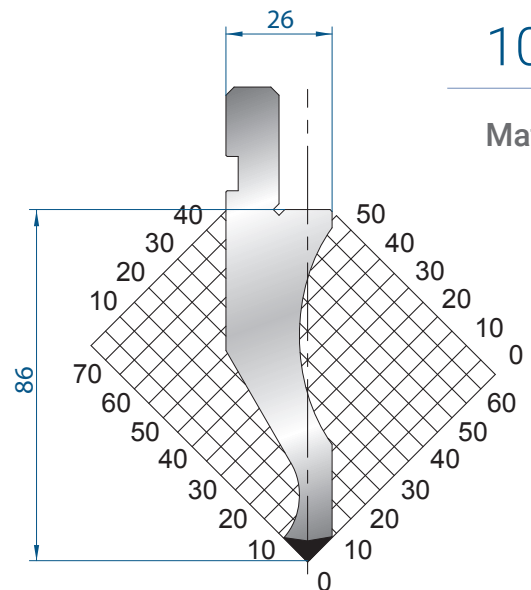

1022

Mat = C45
H = 86.00
Max T/m = 100
 $\alpha = 88^\circ$
R = 0.8

835 mm	13,0 kg
415 mm	6,0 kg
805 mm	13,0 kg
FRAZ. / SECT.	

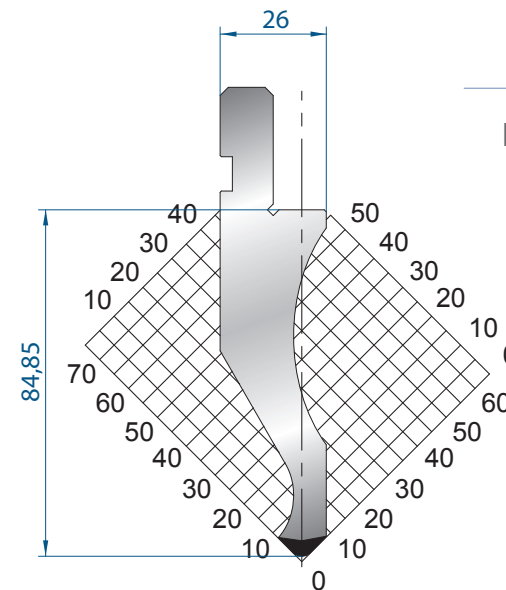

1023

Mat = C45
H = 84.85
Max T/m = 100
 $\alpha = 88^\circ$
R = 3

835 mm	13,0 kg
415 mm	6,0 kg
805 mm	13,0 kg
FRAZ. / SECT.	



1291

Mat = C45
bonificato / tempered


H = 200.00

Max T/m = 85

$\alpha = 88^\circ$

R = 0.8

505 mm	32,5 kg
805 mm	54,0 kg
FRAZ. / SECT.	

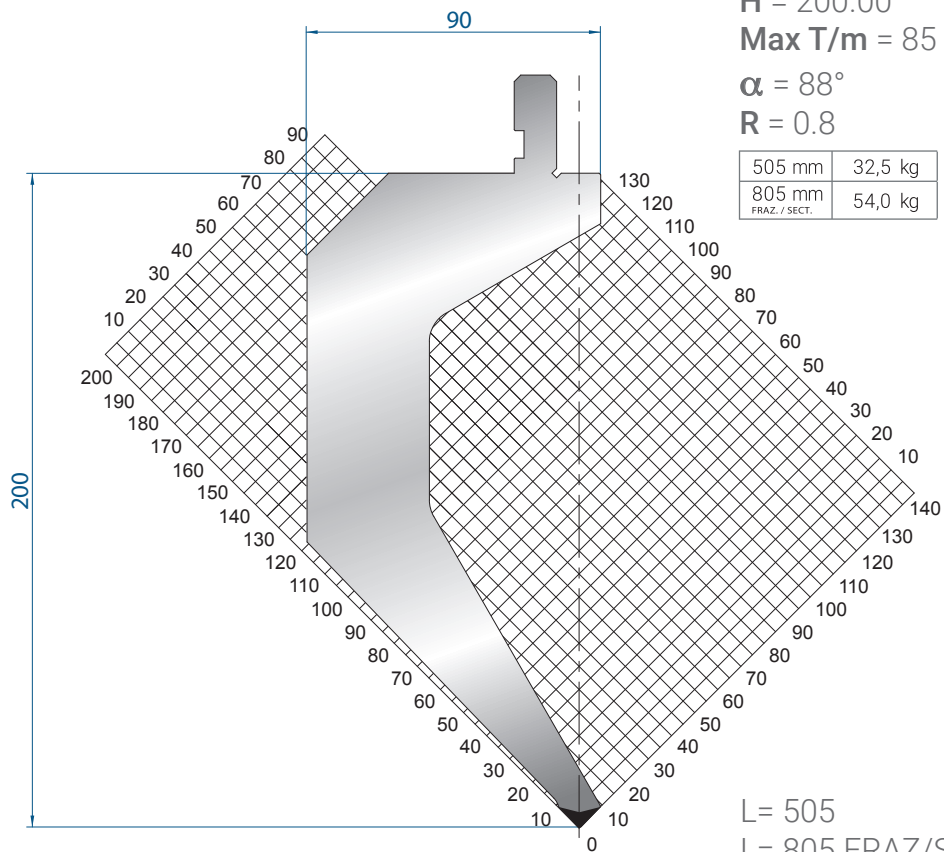

L = 505
L = 805 FRAZ/SECT

1301

Mat = C45
bonificato / tempered


H = 199.03

Max T/m = 85

$\alpha = 88^\circ$


R = 3

505 mm	32,5 kg
805 mm	54,0 kg
FRAZ. / SECT.	

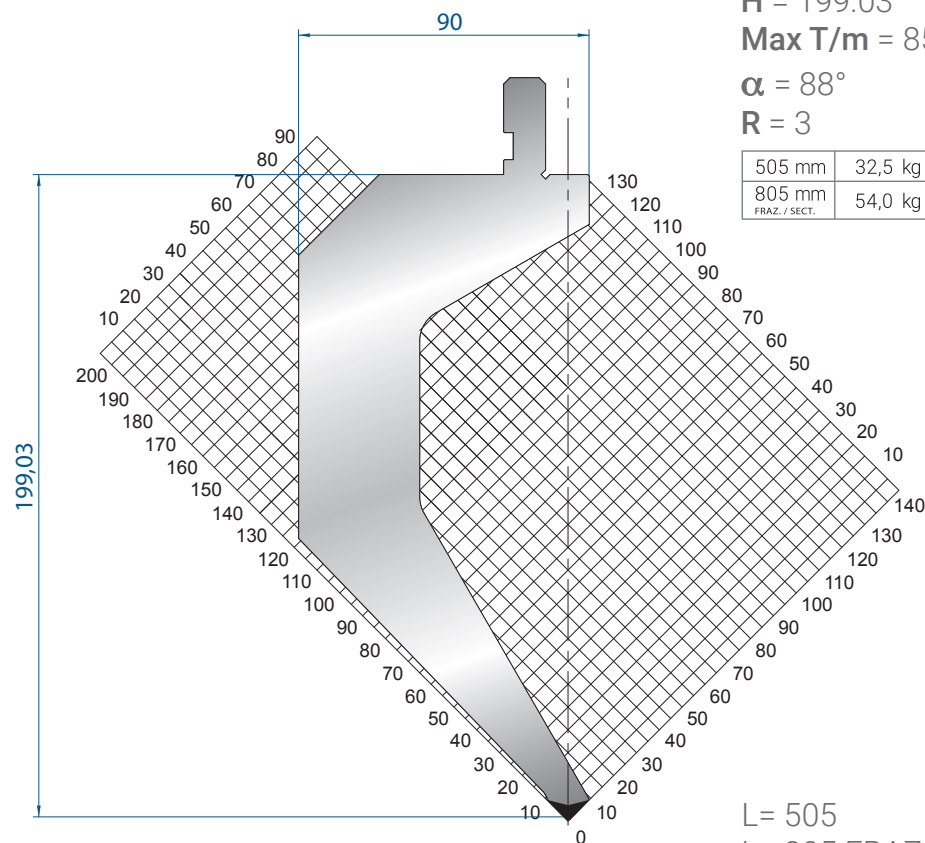


L = 505
L = 805 FRAZ/SECT

AMADA
PROMECAM STYLE

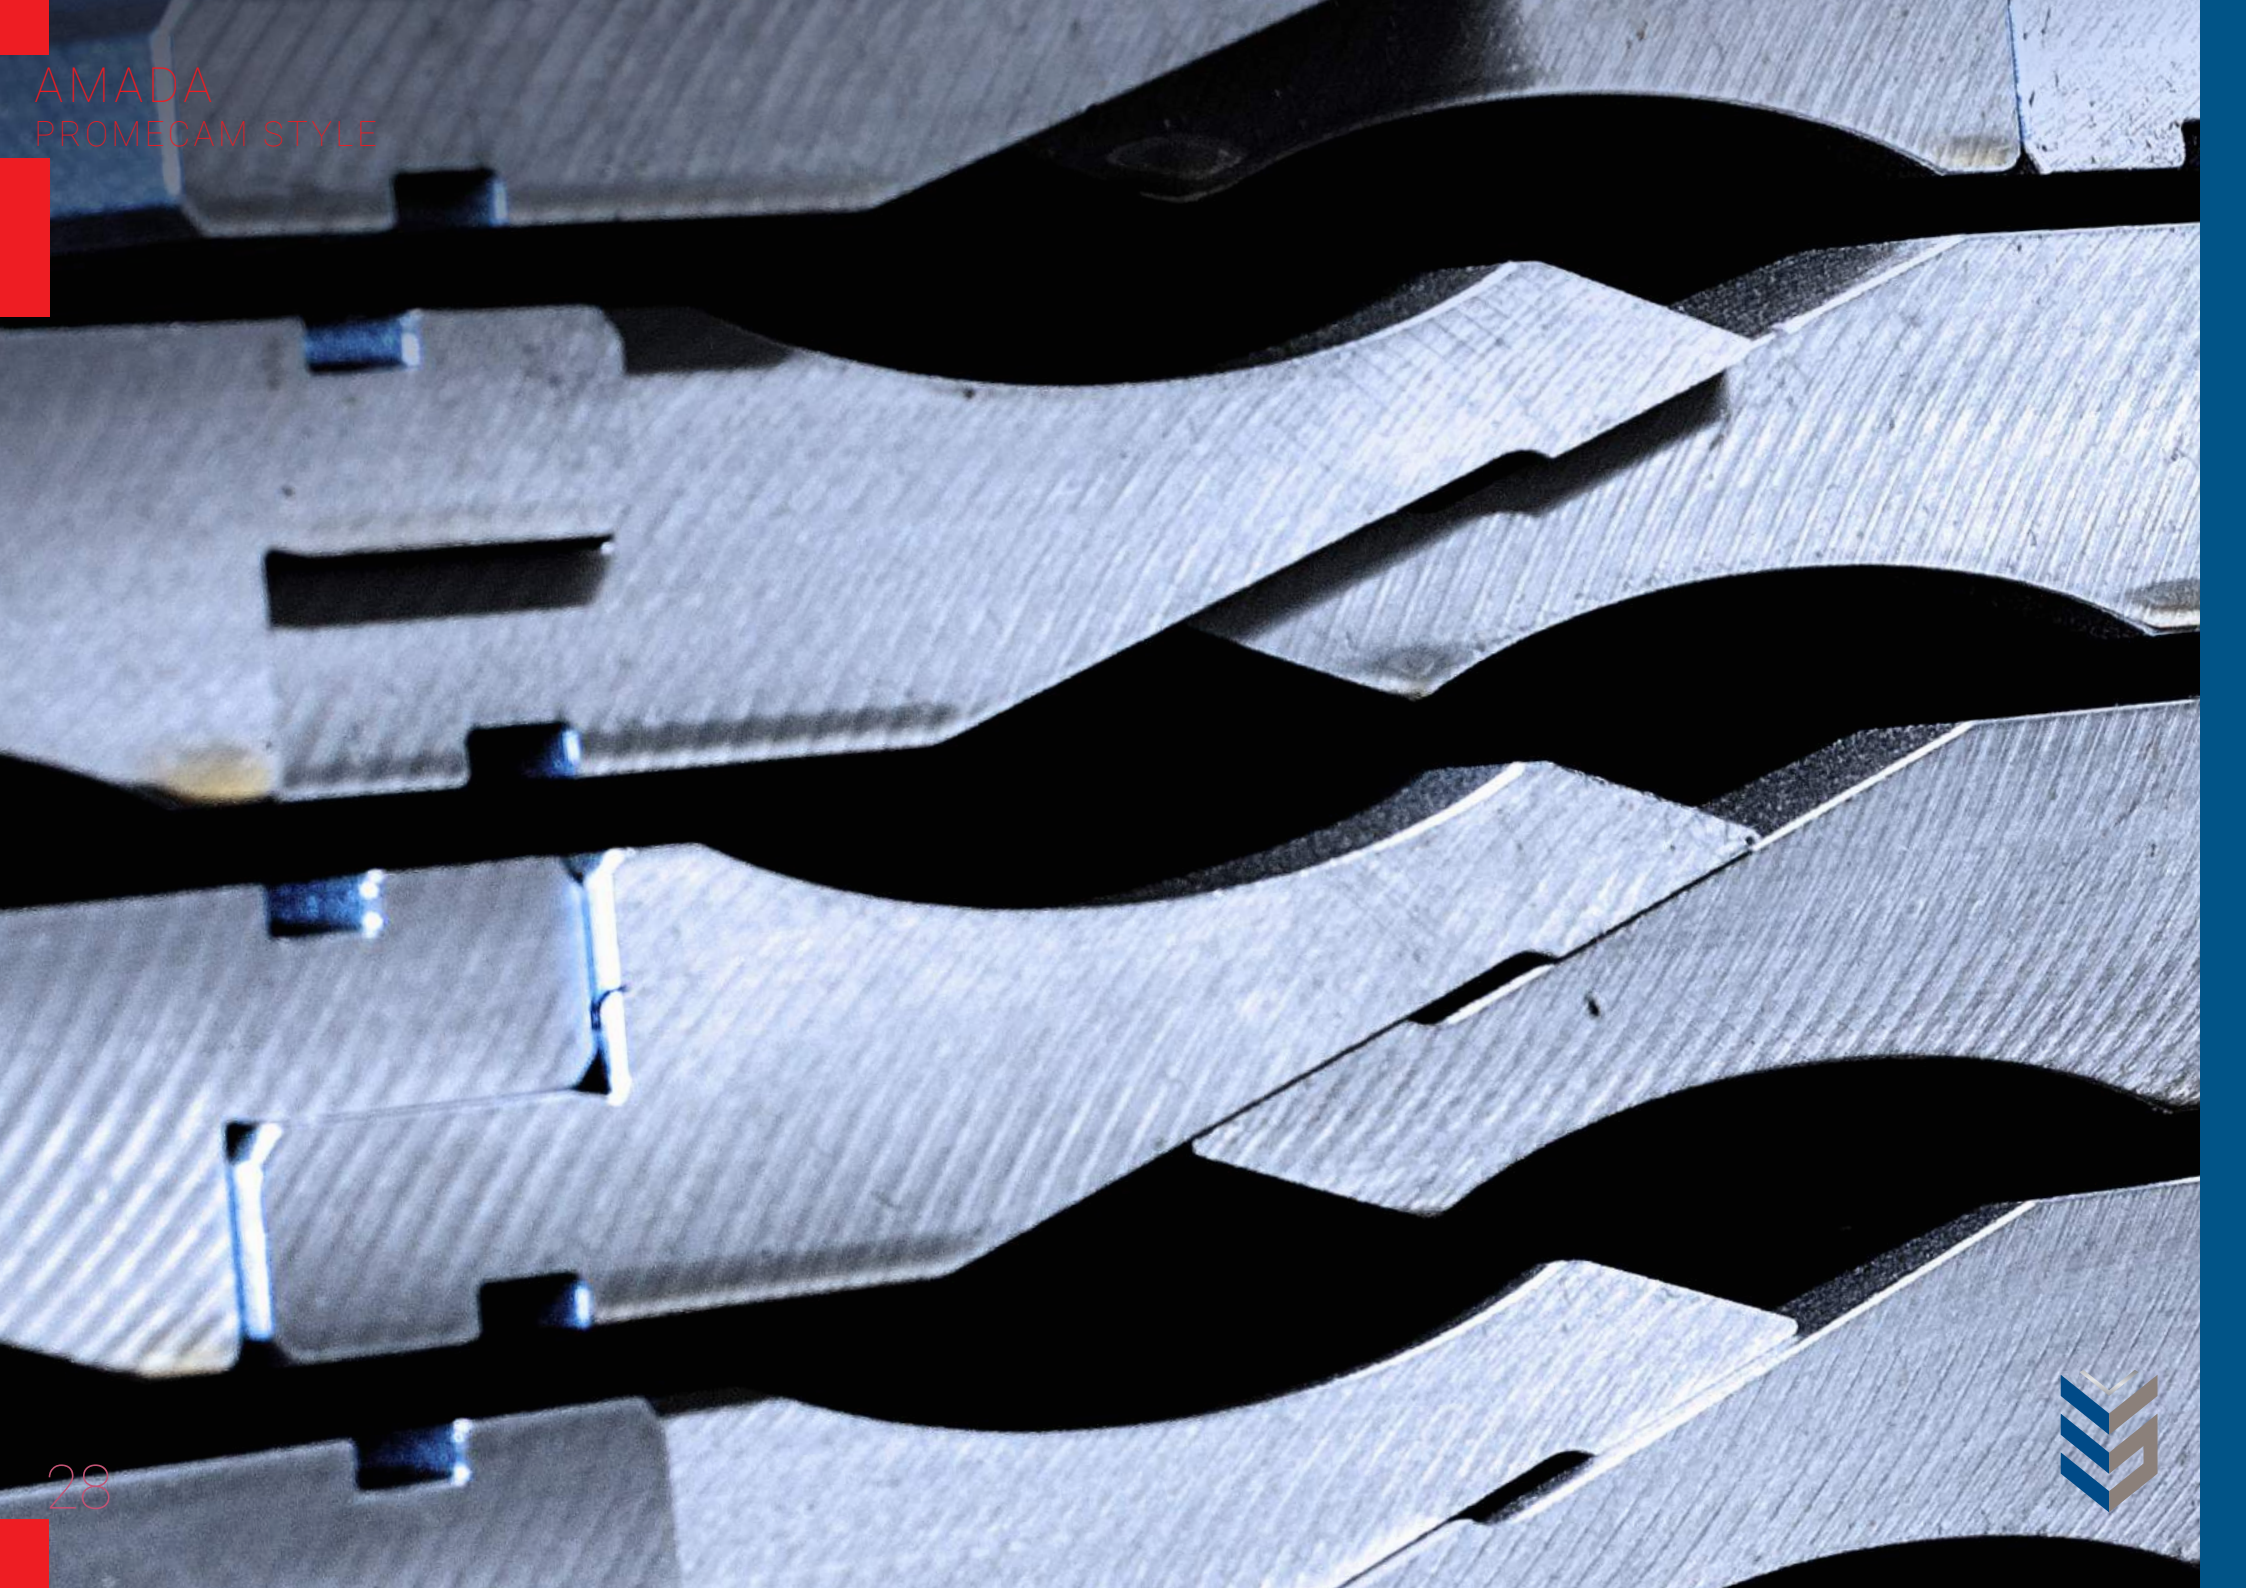


AMADA
PROMECAM STYLE

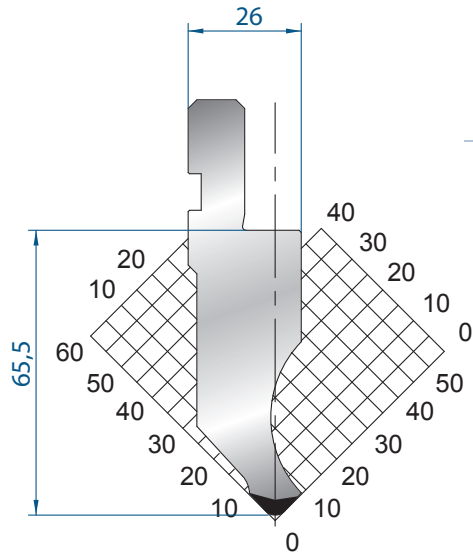

1177

Mat = C45
H = 65.50
Max T/m = 100
 $\alpha = 85^\circ$
R = 3


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

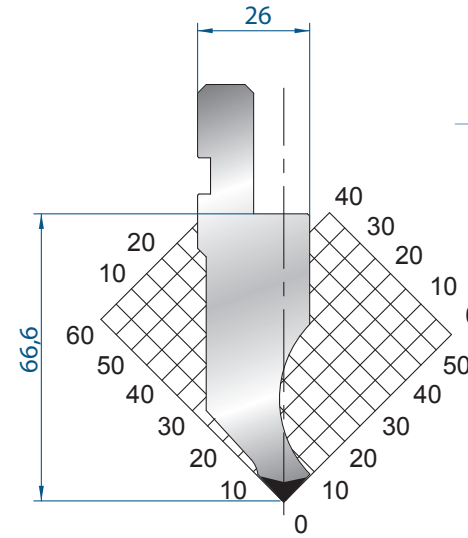

1260

Mat = C45
H = 66.60
Max T/m = 100
 $\alpha = 85^\circ$
R = 0.8


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

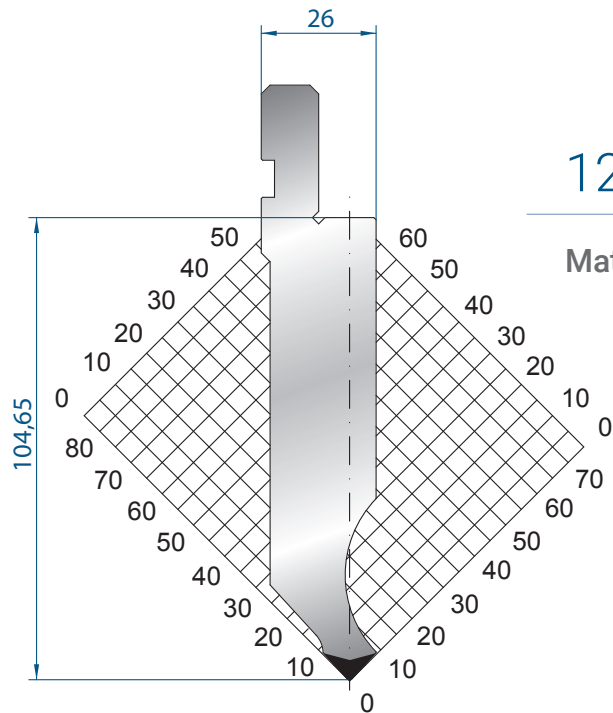

1281

Mat = C45
H = 104.65
Max T/m = 100
 $\alpha = 85^\circ$
R = 0.8

835 mm	17,0 kg
415 mm	9,0 kg
805 mm	17,0 kg
FRAZ. / SECT.	

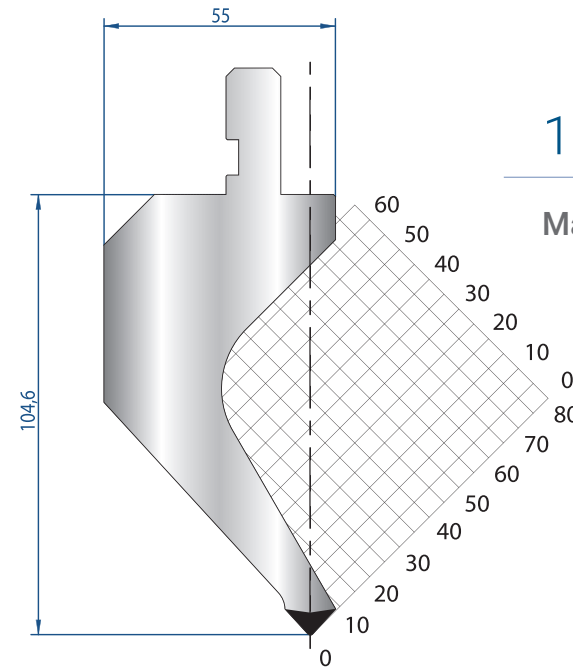


1172

Mat = C45
H = 104.60
Max T/m = 50
 $\alpha = 85^\circ$
R = 0.8

835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	




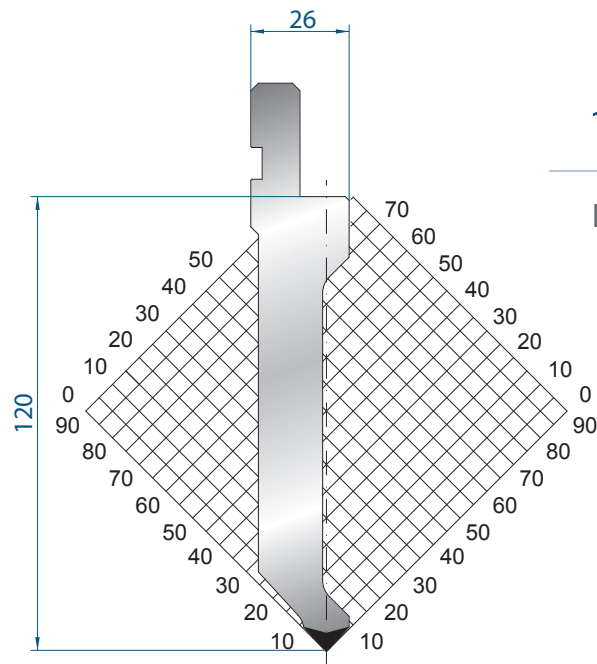

1309

Mat = C45
H = 120.00
Max T/m = 70
 $\alpha = 85^\circ$
R = 0.8


835 mm	15,9 kg
415 mm	8,0 kg
805 mm	15,9 kg
FRAZ. / SECT.	

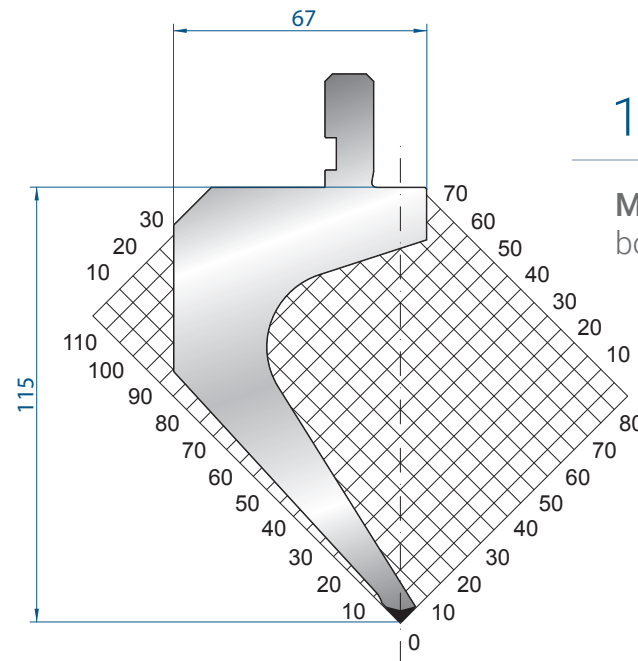

1310

Mat = 42CrMo4
bonificato / tempered
H = 115.00
Max T/m = 35
 $\alpha = 85^\circ$
R = 0.8


835 mm	23,0 kg
415 mm	11,5 kg
805 mm	23,0 kg
FRAZ. / SECT.	

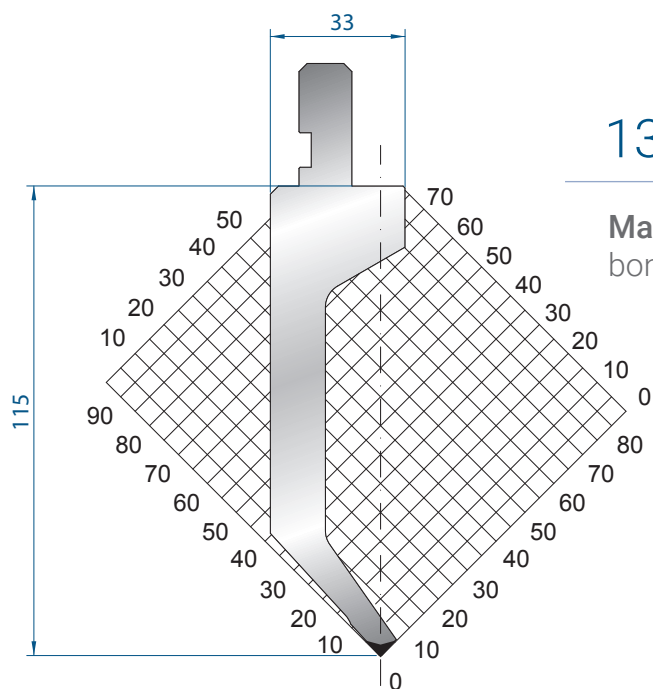

1312

Mat = 42CrMo4
bonificato / tempered
H = 115.00
Max T/m = 20
 $\alpha = 85^\circ$
R = 0.6


835 mm	14,5 kg
415 mm	7,2 kg
805 mm	14,5 kg
FRAZ. / SECT.	

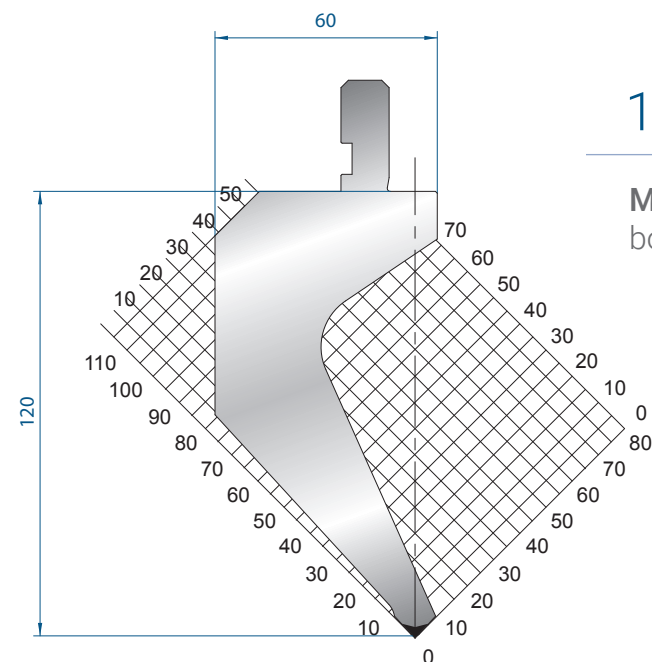

1322

Mat = 42CrMo4
bonificato / tempered
H = 120.00
Max T/m = 100
 $\alpha = 85^\circ$
R = 1.5


835 mm	26,7 kg
415 mm	13,3 kg
805 mm	26,7 kg
FRAZ. / SECT.	

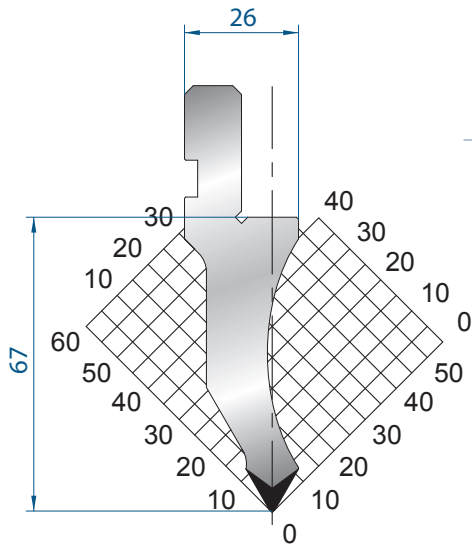

1026

Mat = C45
H = 67.00
Max T/m = 80
 $\alpha = 60^\circ$
R = 0.8


835 mm	9,0 kg
415 mm	4,0 kg
805 mm	9,0 kg
FRAZ. / SECT.	

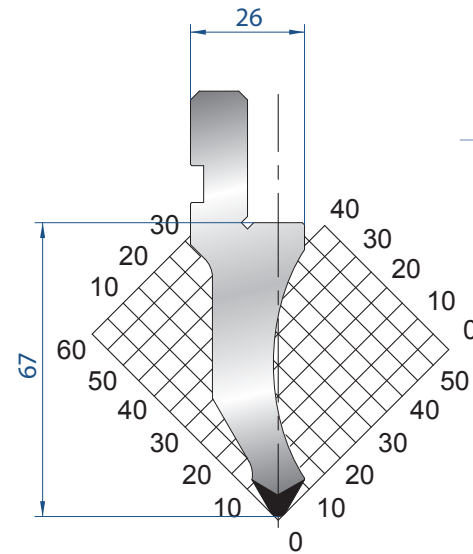

1027

Mat = C45
H = 67.00
Max T/m = 80
 $\alpha = 60^\circ$
R = 2


835 mm	9,0 kg
415 mm	4,0 kg
805 mm	9,0 kg
FRAZ. / SECT.	

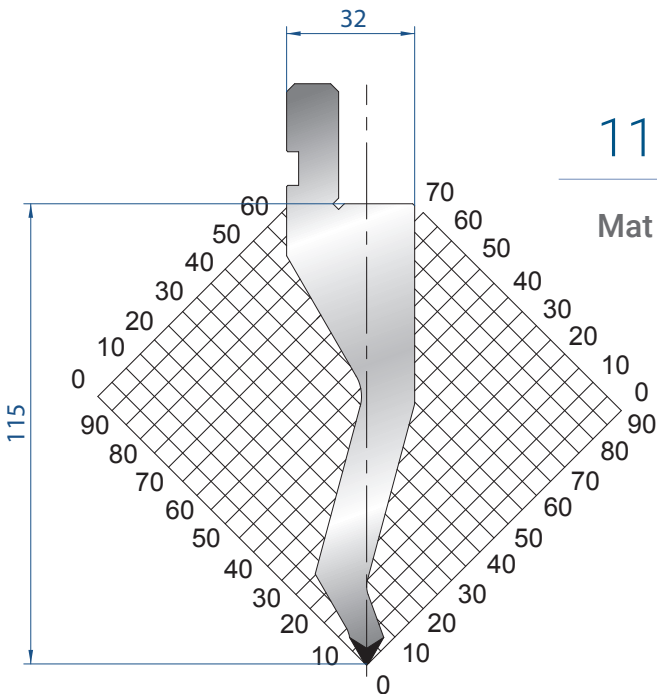

1191

Mat = C45
H = 115.00
Max T/m = 60
 $\alpha = 60^\circ$
R = 0.8

835 mm	15,0 kg
415 mm	7,0 kg
805 mm	15,0 kg
FRAZ. / SECT.	

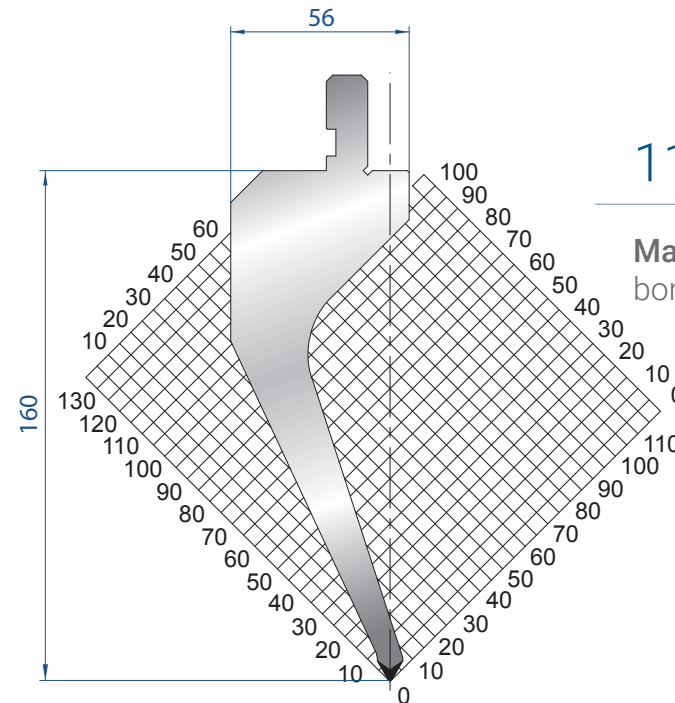


1190

Mat = C45
bonificato / tempered
H = 160.00
Max T/m = 40
 $\alpha = 60^\circ$
R = 0.8

835 mm	27,0 kg
415 mm	13,5 kg
805 mm	27,0 kg
FRAZ. / SECT.	



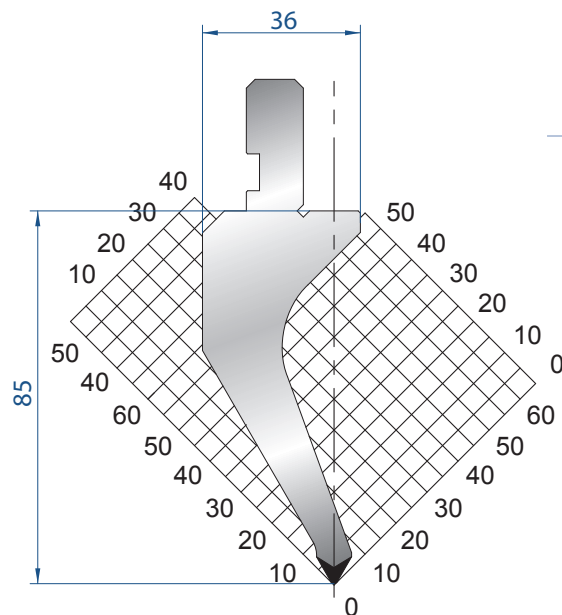


1162

Mat = 42CrMo4
bonificato / tempered

H = 85.00
Max T/m = 40
α = 60°
R = 0.8

835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	

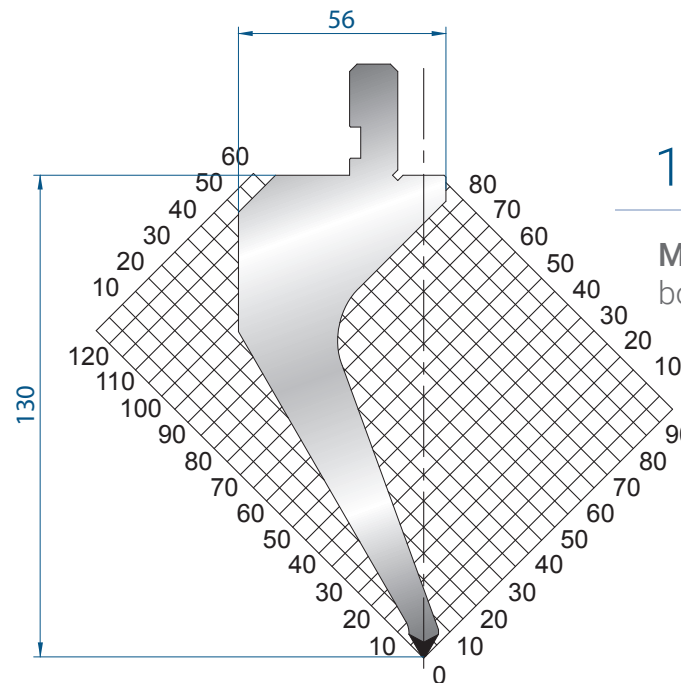


1163

Mat = C45
bonificato / tempered

H = 130.00
Max T/m = 40
α = 60°
R = 0.8

835 mm	23,0 kg
415 mm	11,0 kg
805 mm	23,0 kg
FRAZ. / SECT.	

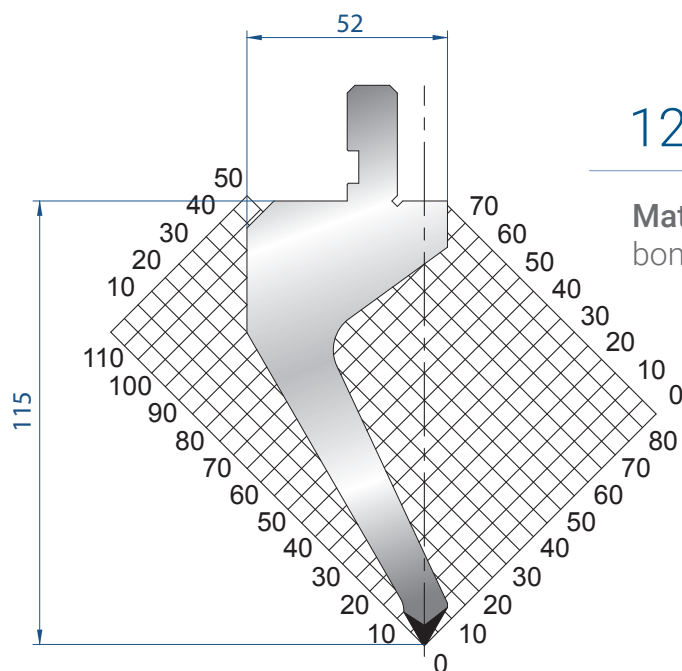


1272

Mat = C45
bonificato / tempered

H = 115.00
Max T/m = 40
α = 60°
R = 0.8

835 mm	20,0 kg
415 mm	10,0 kg
805 mm	20,0 kg
FRAZ. / SECT.	

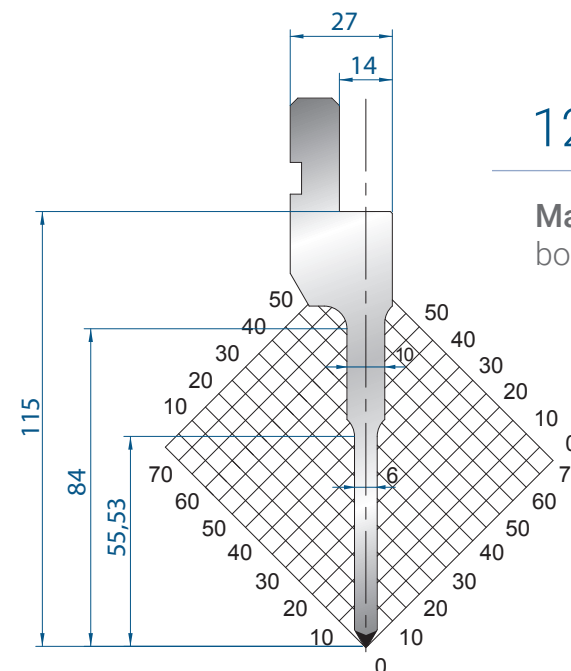


1271

Mat = C45
bonificato / tempered

H = 115.00
Max T/m = 50
α = 60°
R = 0.8


835 mm	9,0 kg
415 mm	4,0 kg
805 mm	9,0 kg
FRAZ. / SECT.	

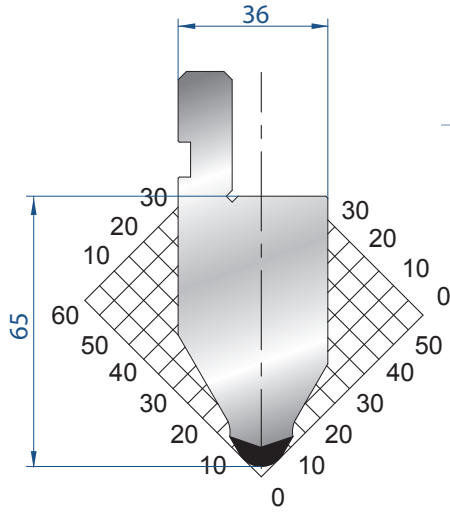

1032

Mat = C45
 H = 65.00
 Max T/m = 120
 $\alpha = 60^\circ$
 R = 6


835 mm	14,0 kg
415 mm	7,0 kg
805 mm	14,0 kg
FRAZ. / SECT.	

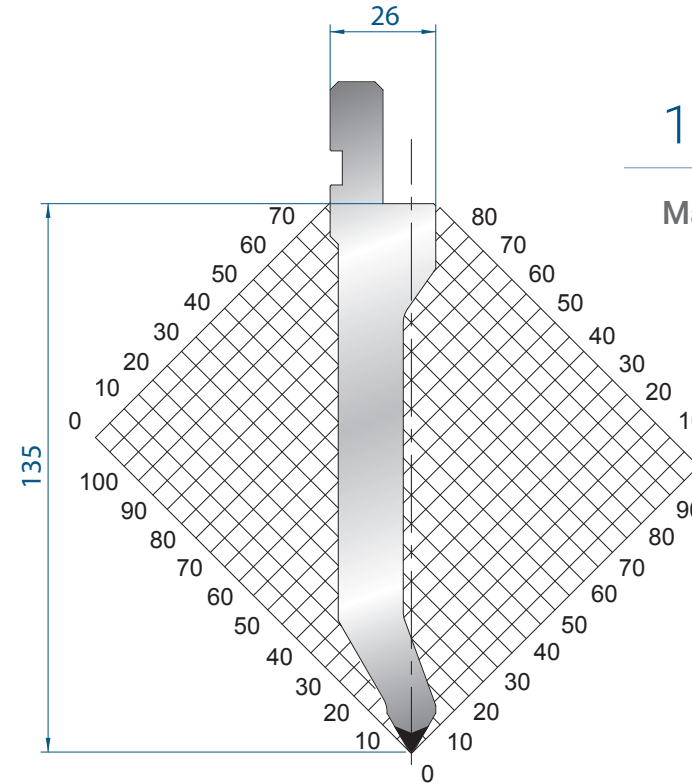

1284

Mat = C45
 H = 135.00
 Max T/m = 70
 $\alpha = 60^\circ$
 R = 0.8

835 mm	19,0 kg
415 mm	9,0 kg
805 mm	19,0 kg
FRAZ. / SECT.	

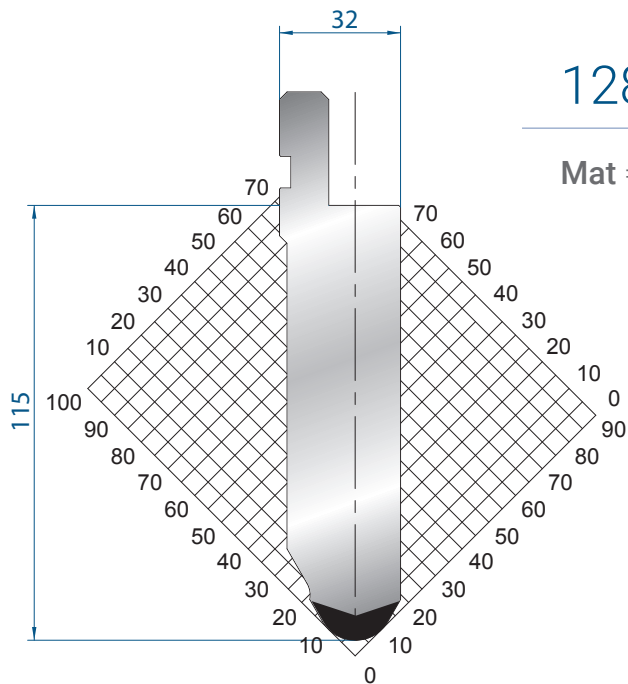

1283


Mat = C45
 H = 115.00
 Max T/m = 150
 $\alpha = 60^\circ$
 R = 10


835 mm	25,0 kg
415 mm	12,0 kg
805 mm	25,0 kg
FRAZ. / SECT.	





1293

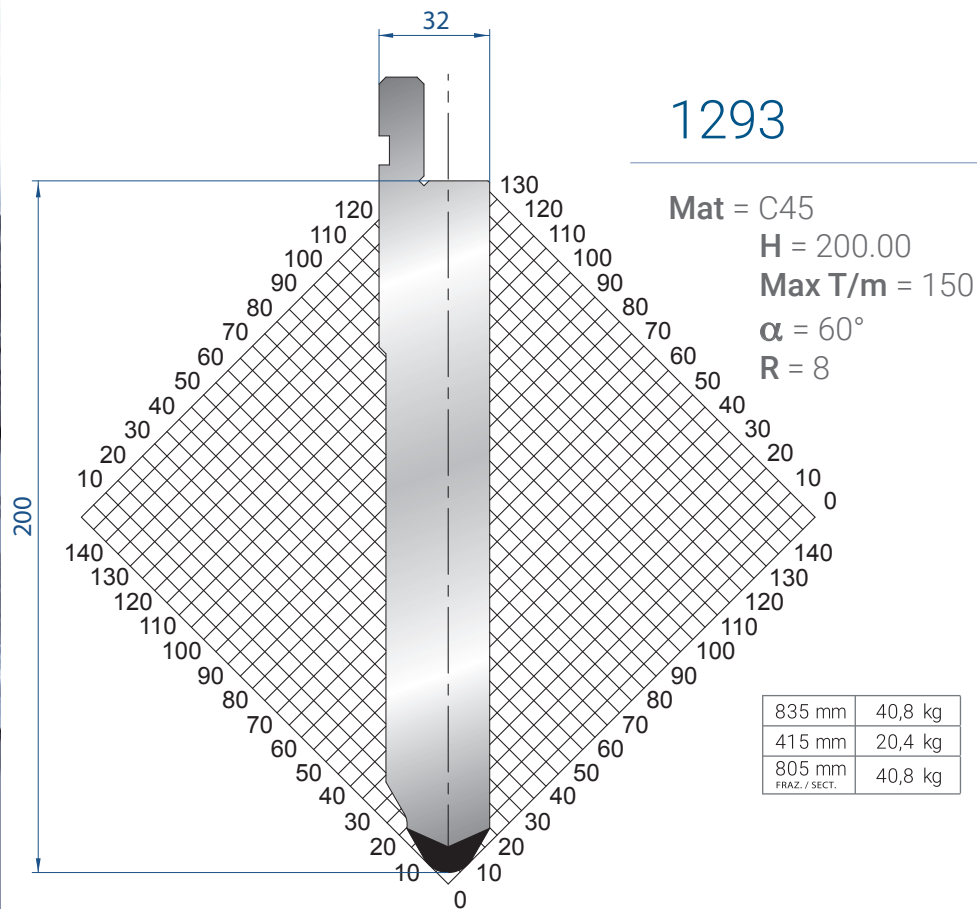


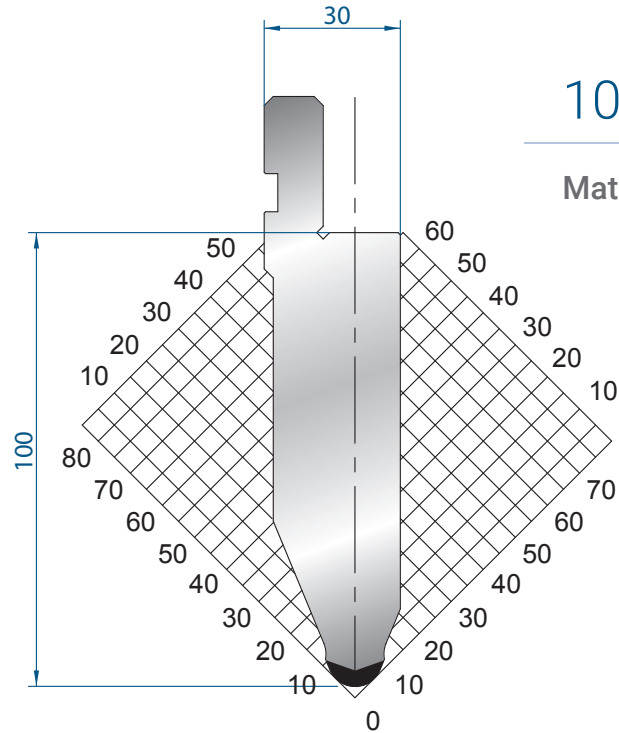

1053

Mat = C45
H = 100.00
Max T/m = 100
 $\alpha = 45^\circ$
R = 6


835 mm	19,0 kg
415 mm	9,0 kg
805 mm	19,0 kg
FRAZ. / SECT.	

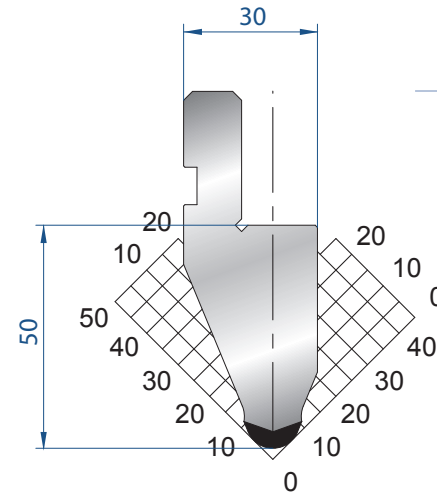

1054

Mat = C45
H = 50.00
Max T/m = 100
 $\alpha = 45^\circ$
R = 6


835 mm	9,0 kg
415 mm	4,0 kg
805 mm	9,0 kg
FRAZ. / SECT.	

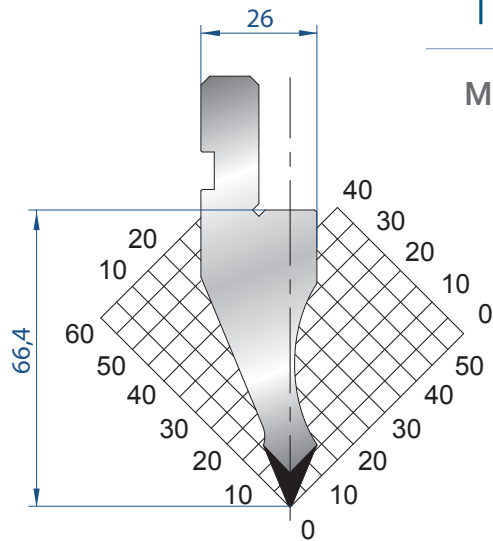

1024

Mat = C45
H = 66.40
Max T/m = 80
 $\alpha = 45^\circ$
R = 0.5

835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	

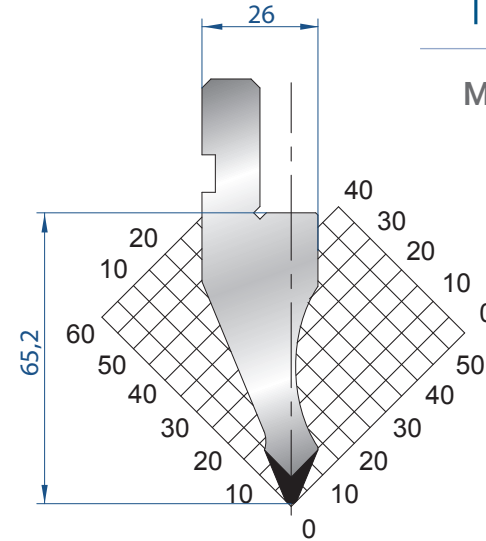


1025

Mat = C45
H = 65.20
Max T/m = 80
 $\alpha = 45^\circ$
R = 1.5

835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	




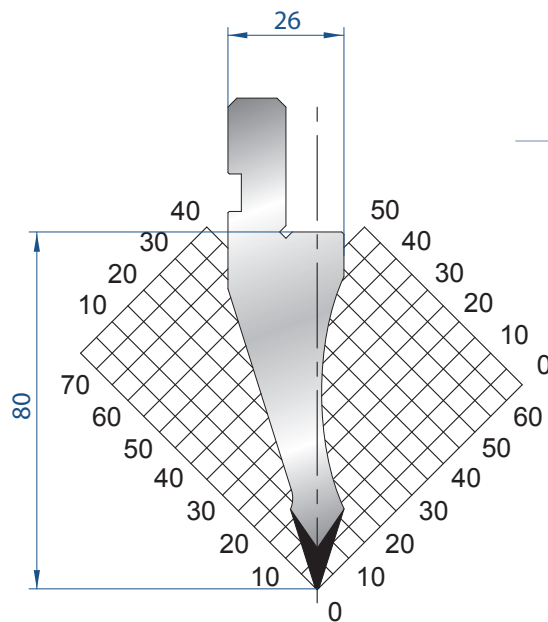

1035

Mat = C45
 H = 80.00
 Max T/m = 70
 $\alpha = 35^\circ$
 R = 0.5


835 mm	11,0 kg
415 mm	5,0 kg
805 mm	11,0 kg
FRAZ. / SECT.	

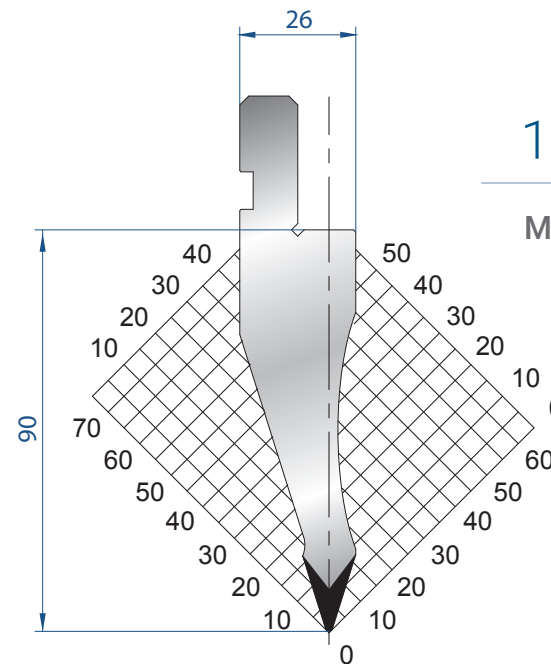

1047

Mat = C45
 H = 90.00
 Max T/m = 70
 $\alpha = 35^\circ$
 R = 0.8


835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	

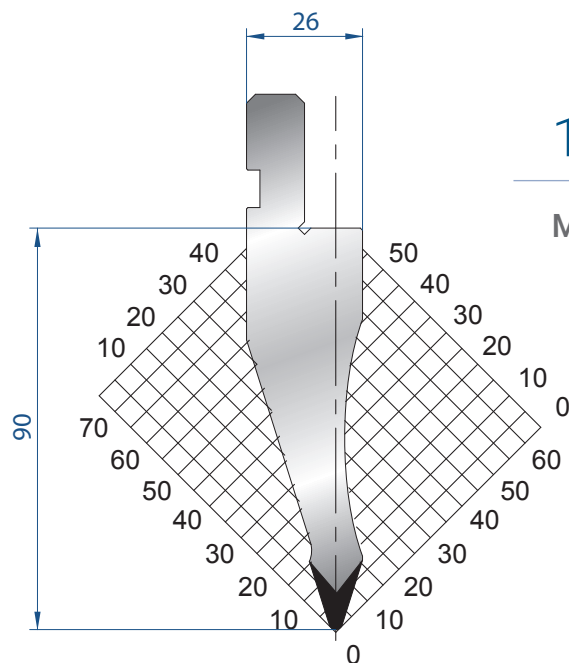

1282

Mat = C45
 H = 90.00
 Max T/m = 70
 $\alpha = 35^\circ$
 R = 1.5


835 mm	12,0 kg
415 mm	6,0 kg
805 mm	12,0 kg
FRAZ. / SECT.	

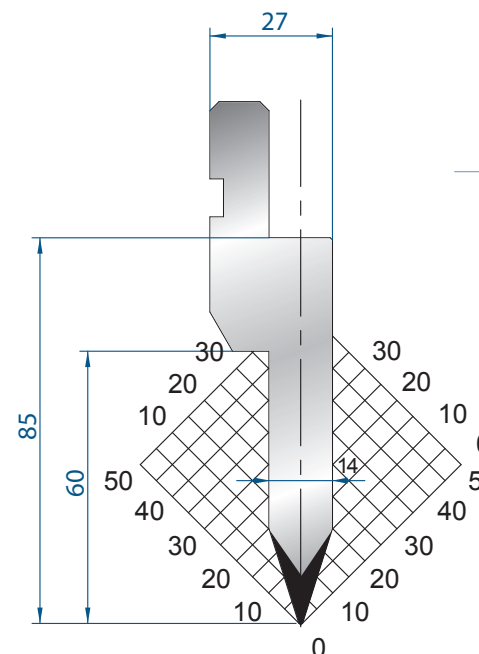

1034

Mat = C45
 H = 85.00
 Max T/m = 100
 $\alpha = 35^\circ$
 P = 0.8


835 mm	10,0 kg
415 mm	5,0 kg
805 mm	10,0 kg
FRAZ. / SECT.	

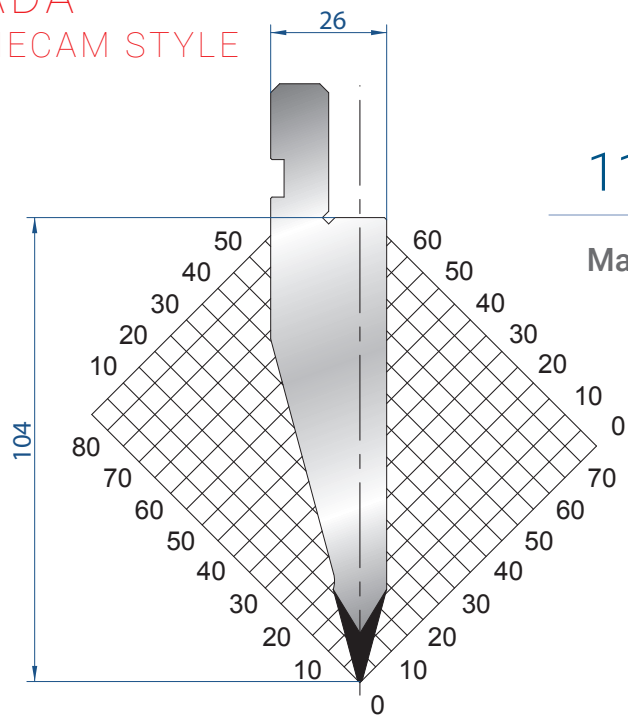

1193

Mat = C45
H = 104.00
Max T/m = 100
 $\alpha = 30^\circ$
R = 0.6


835 mm	16,0 kg
415 mm	8,0 kg
805 mm FRAZ. / SECT.	16,0 kg

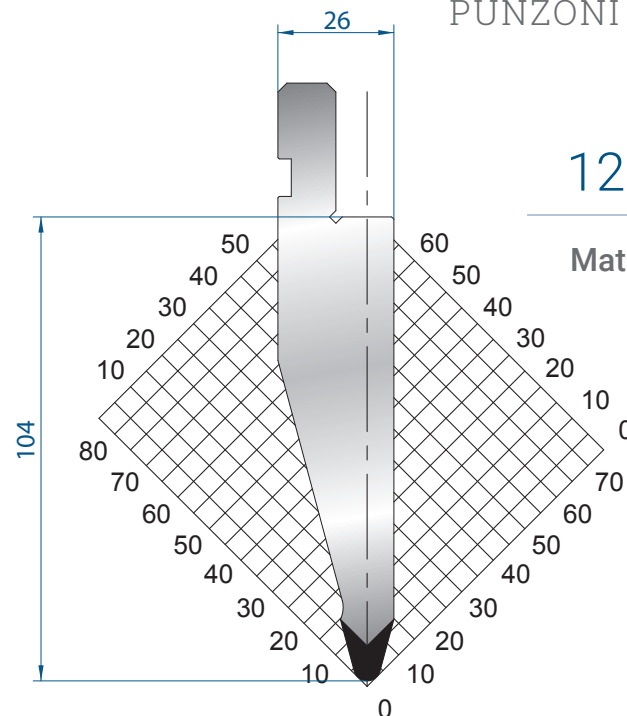

1289

Mat = C45
H = 104.00
Max T/m = 100
 $\alpha = 30^\circ$
R = 3


835 mm	16,0 kg
415 mm	8,0 kg
805 mm FRAZ. / SECT.	16,0 kg

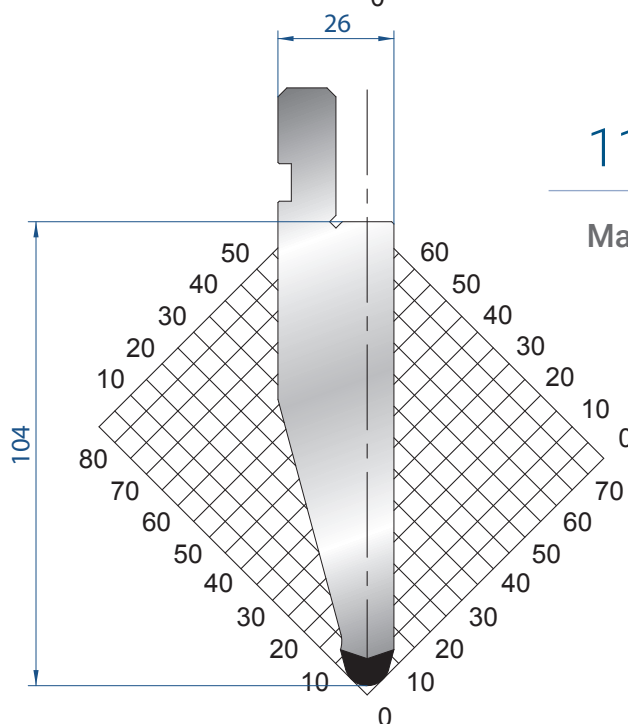

1194

Mat = C45
H = 104.00
Max T/m = 100
 $\alpha = 30^\circ$
R = 5

835 mm	16,0 kg
415 mm	8,0 kg
805 mm FRAZ. / SECT.	16,0 kg

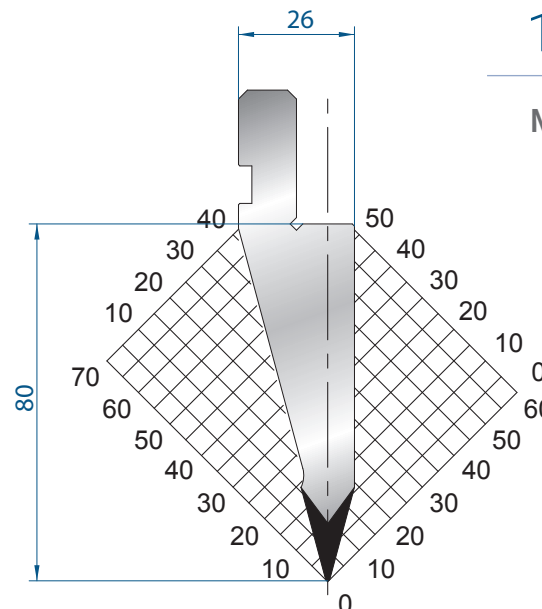


1056

Mat = C45
H = 80.00
Max T/m = 100
 $\alpha = 30^\circ$
R = 0.5

835 mm	10,0 kg
415 mm	5,0 kg
805 mm FRAZ. / SECT.	10,0 kg




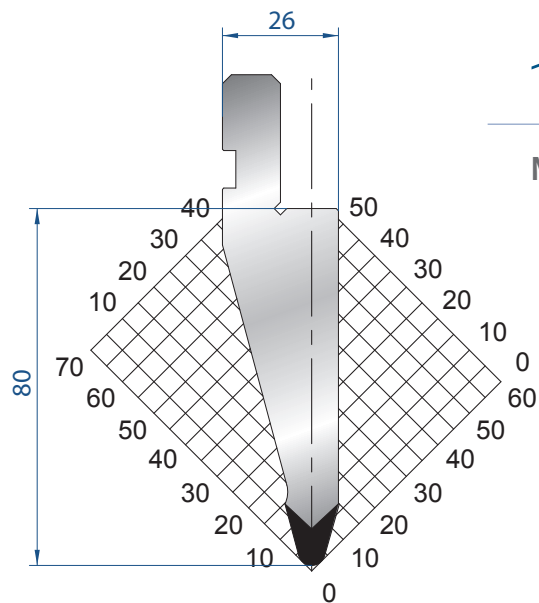

1057

Mat = C45
 H = 80.00
 Max T/m = 100
 $\alpha = 30^\circ$
 R = 3


835 mm	10,0 kg
415 mm	5,0 kg
805 mm FRAZ. / SECT.	10,0 kg

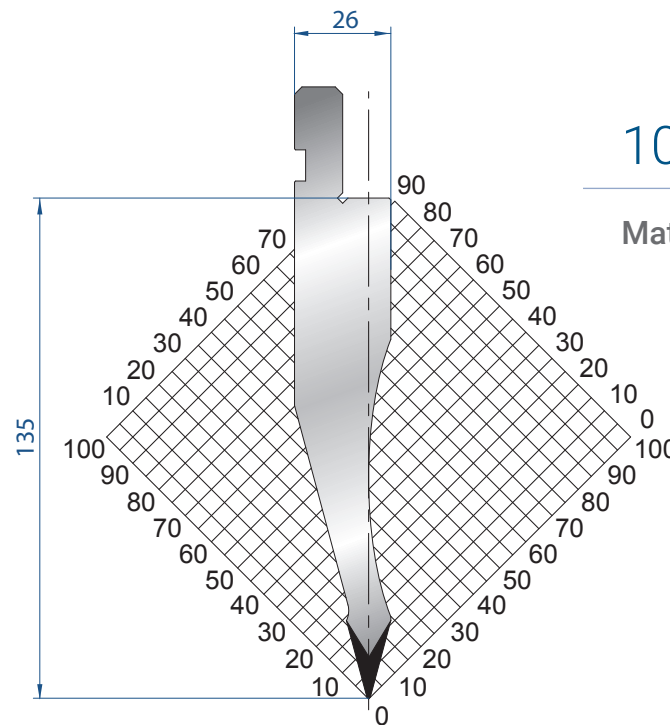

1052

Mat = C45
 H = 135.00
 Max T/m = 50
 $\alpha = 30^\circ$
 R = 0.5



835 mm	19,0 kg
415 mm	9,0 kg
805 mm FRAZ. / SECT.	19,0 kg

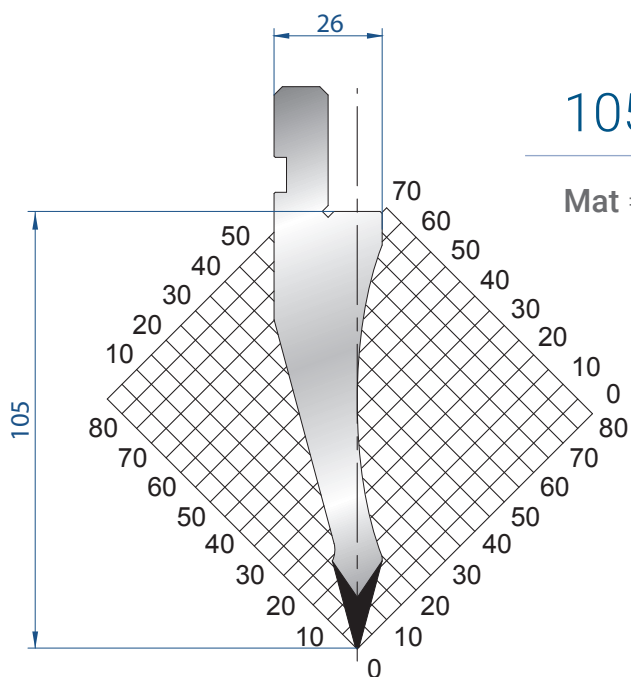


1055

Mat = C45
 H = 105.00
 Max T/m = 50
 $\alpha = 30^\circ$
 R = 0.5

835 mm	15,0 kg
415 mm	7,0 kg
805 mm FRAZ. / SECT.	15,0 kg

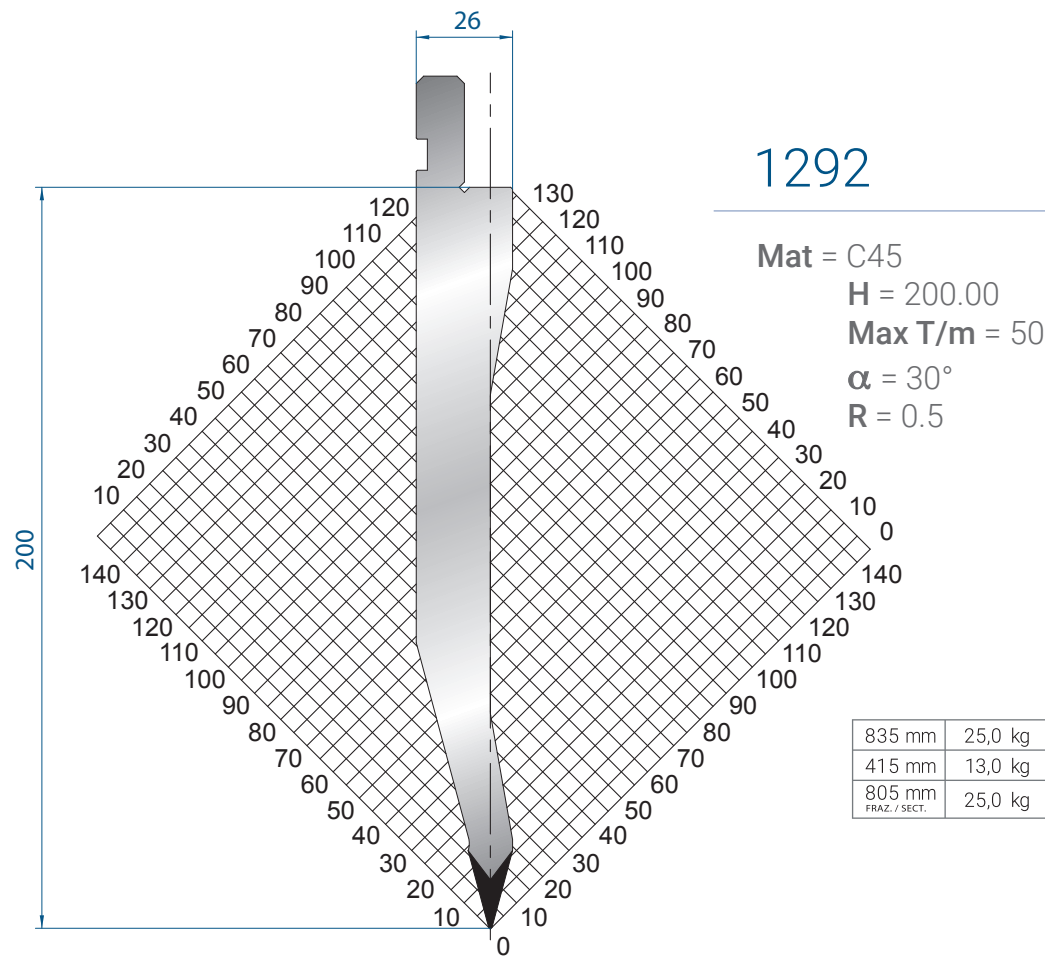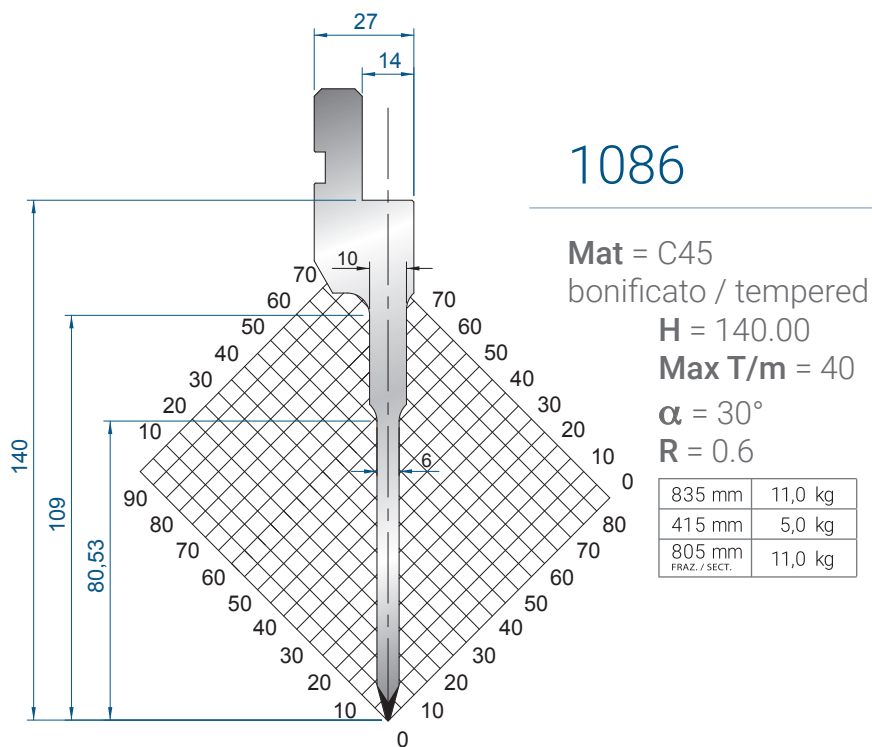


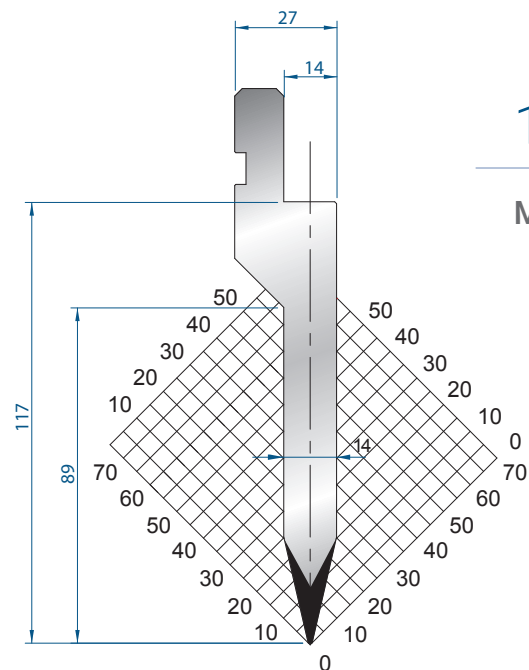

1033

Mat = C45
 H = 117.00
 Max T/m = 100
 $\alpha = 26^\circ$
 P = 1


835 mm	13,8 kg
415 mm	6,0 kg
805 mm	13,8 kg
FRAZ. / SECT.	

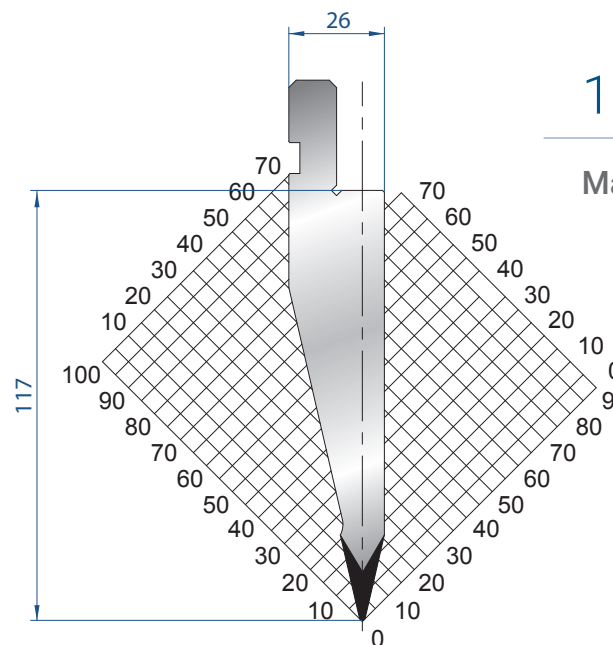

1178

Mat = C45
 H = 117.00
 Max T/m = 100
 $\alpha = 26^\circ$
 R = 0.8


835 mm	16,0 kg
415 mm	8,0 kg
805 mm	16,0 kg
FRAZ. / SECT.	

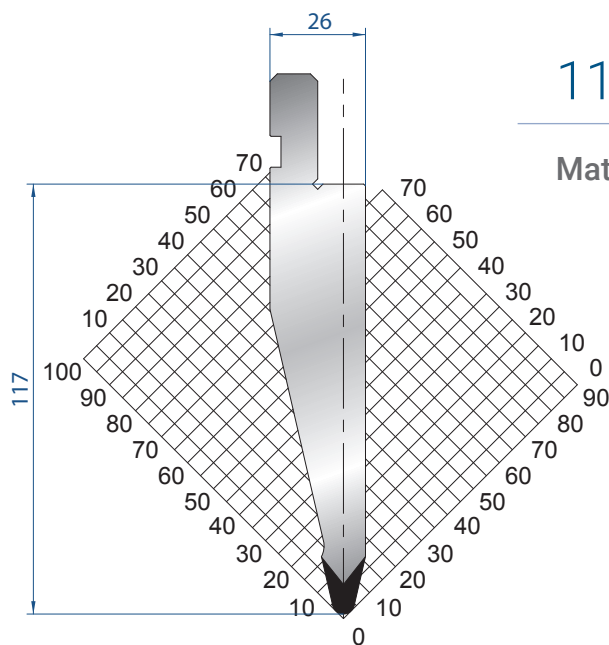

1192

Mat = C45
 H = 117.00
 Max T/m = 100
 $\alpha = 26^\circ$
 R = 3

835 mm	16,0 kg
415 mm	8,0 kg
805 mm	16,0 kg
FRAZ. / SECT.	

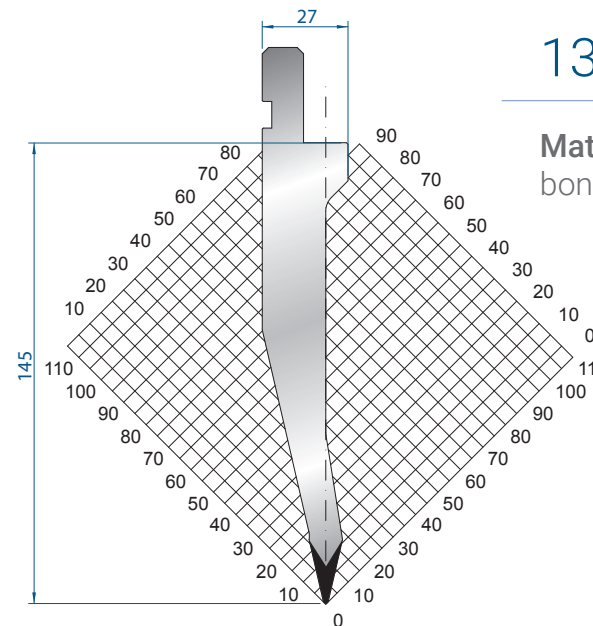

1311

Mat = 42CrMo4
 bonificato / tempered
 H = 145.00
 Max T/m = 100
 $\alpha = 26^\circ$
 R = 0.8

835 mm	14,5 kg
415 mm	7,2 kg
805 mm	14,5 kg
FRAZ. / SECT.	