



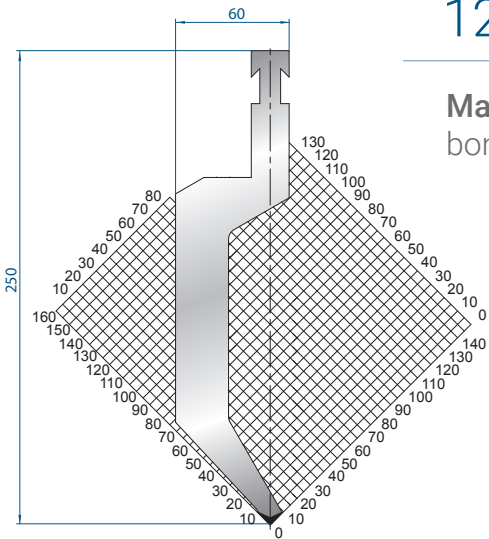


1298

Mat = 42CrMo4
bonificato / tempered
H = 250.00
Max T/m = 60
α = 86°
R = 1.5

500 mm	25,0 kg
1100 mm FRAZ. / SECT.	55,0 kg
100 mm	5,0 kg




ATTACCO RF-A
INCLUSO SU RICHIESTA
RF-A TANG INCLUDED
ON DEMAND

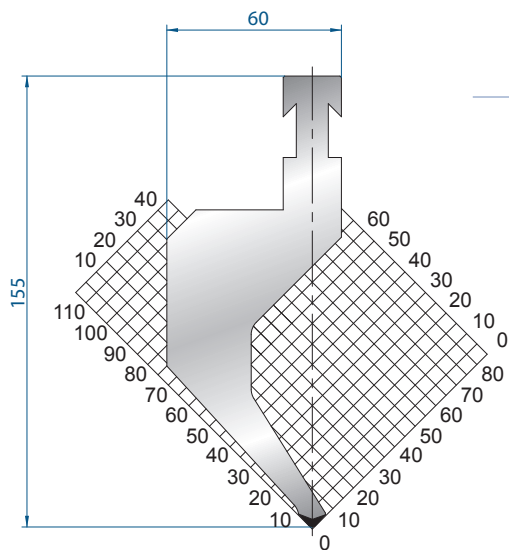

1216

Mat = C45
bonificato / tempered
H = 155.00
Max T/m = 50
α = 85°
R = 1.5

1000 mm	30,0 kg
500 mm	15,0 kg
1100 mm FRAZ. / SECT.	30,0 kg
100 mm	3,0 kg

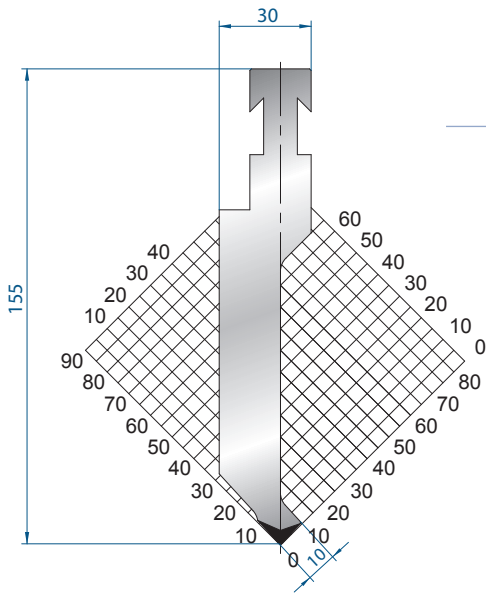


1218

Mat = C45
bonificato / tempered
H = 155.00
Max T/m = 100
α = 85°
R = 1

1000 mm	23,0 kg
500 mm	12,5 kg
1100 mm FRAZ. / SECT.	30,0 kg
100 mm	3,0 kg




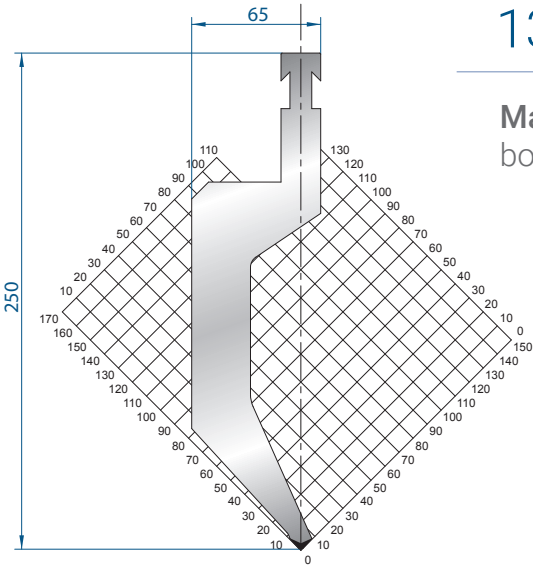

1321


Mat = 42CrMo4
bonificato / tempered
H = 250.00
Max T/m = 100
 α = 85°
R = 1.5

500 mm	27,9 kg
1100 mm FRAZ. / SECT.	61,0 kg
100 mm	5,6 kg



ATTACCO RF-A
INCLUSO SU RICHIESTA
RF-A TANG INCLUDED
ON DEMAND




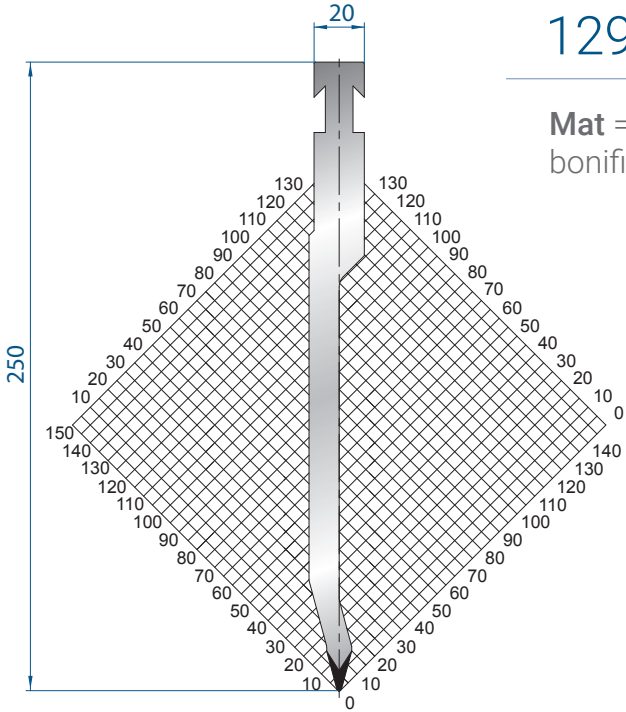


1299

Mat = 42CrMo4
bonificato / tempered
H = 250.00
Max T/m = 80
α = 30°
R = 1

500 mm	13,3 kg
1100 mm FRAZ. / SECT.	29,2 kg
100 mm	2,6 kg




ATTACCO RF-A
INCLUSO SU RICHIESTA
RF-A TANG INCLUDED
ON DEMAND

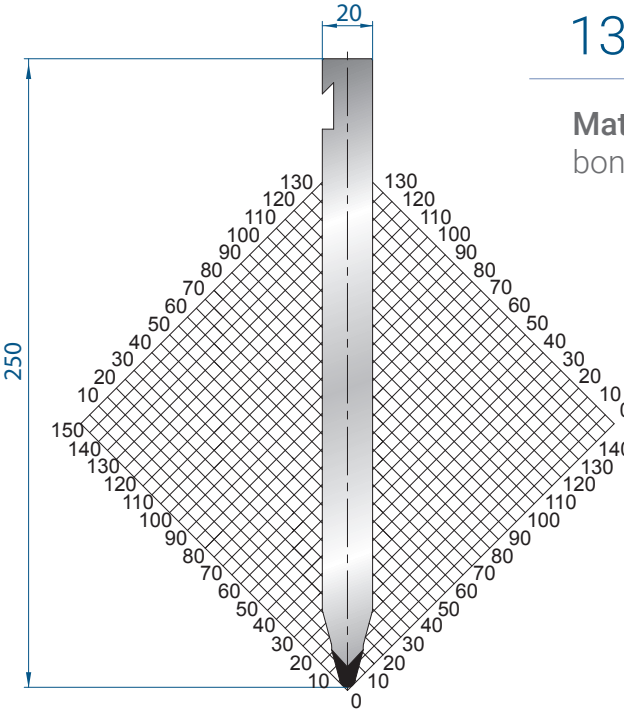


1300

Mat = 42CrMo4
bonificato / tempered
H = 250.00
Max T/m = 120
α = 30°
R = 3

500 mm	21,0 kg
1100 mm FRAZ. / SECT.	46,0 kg
100 mm	4,2 kg



ATTACCO RF-A
INCLUSO SU RICHIESTA
RF-A TANG INCLUDED
ON DEMAND

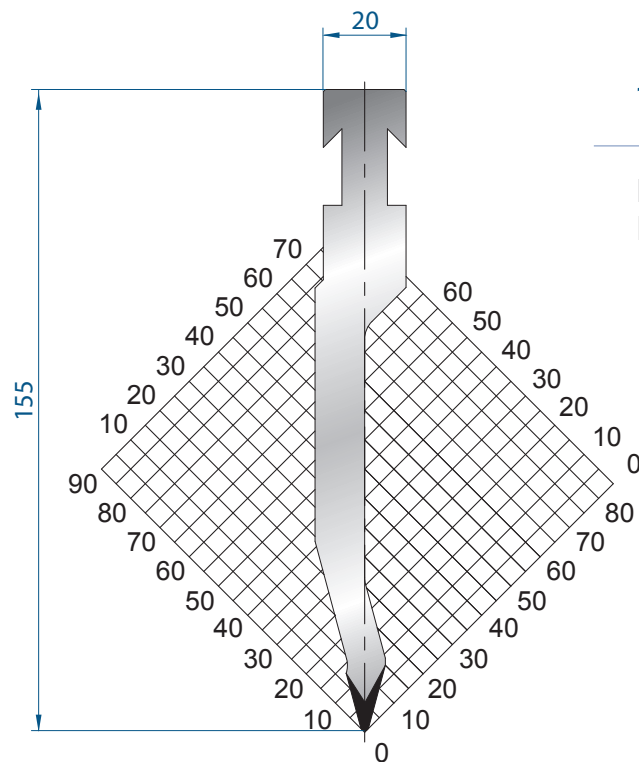

1220

Mat = C45
bonificato / tempered

H = 155.00


Max T/m = 80

α = 30°

R = 1

1000 mm	16,0 kg
500 mm	8,0 kg
1100 mm FRAZ. / SECT.	16,0 kg
100 mm	1,6 kg




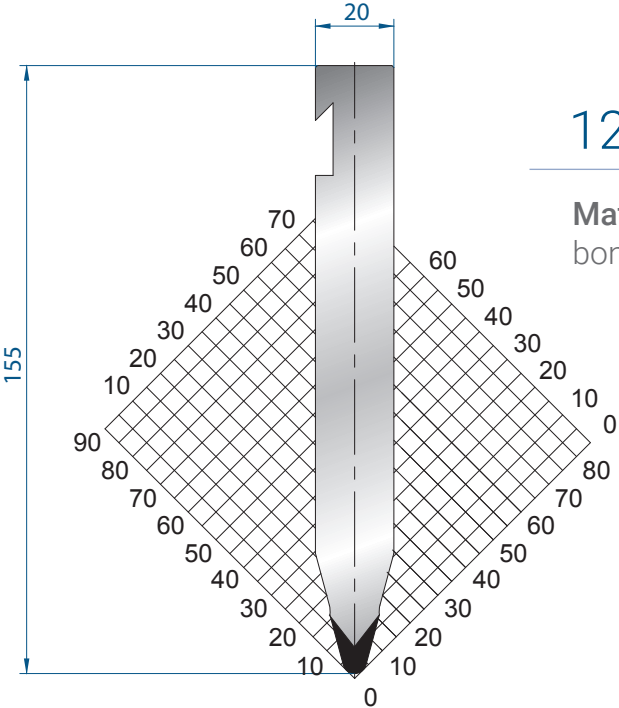

1225

Mat = C45
bonificato / tempered
H = 155.00
Max T/m = 100
α = 30°
R = 3


1000 mm	16,0 kg
500 mm	8,0 kg
1100 mm FRAZ. / SECT.	16,0 kg
100 mm	1,6 kg

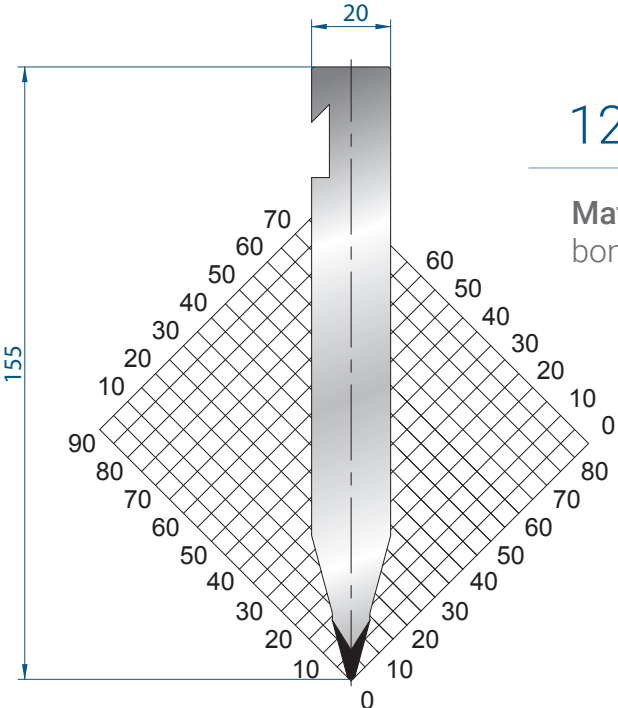

1226

Mat = C45
bonificato / tempered
H = 155.00
Max T/m = 100
α = 30°
R = 1


1000 mm	21,0 kg
500 mm	10,0 kg
1100 mm FRAZ. / SECT.	21,0 kg
100 mm	2,0 kg

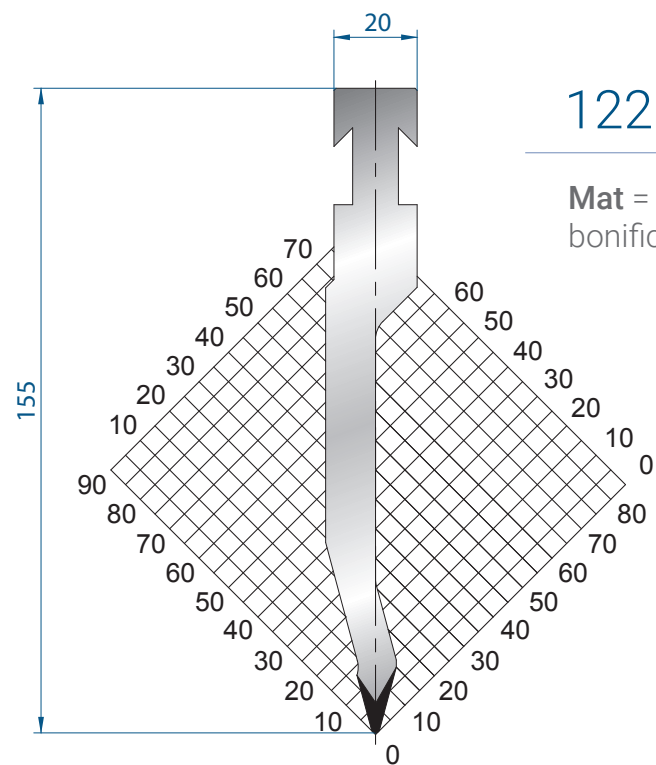


1221

Mat = C45
bonificato / tempered
H = 155.00
Max T/m = 80
 α = 28°
R = 1

1000 mm	16,0 kg
500 mm	8,0 kg
1100 mm FRAZ. 7 SECT.	16,0 kg
100 mm	1,6 kg

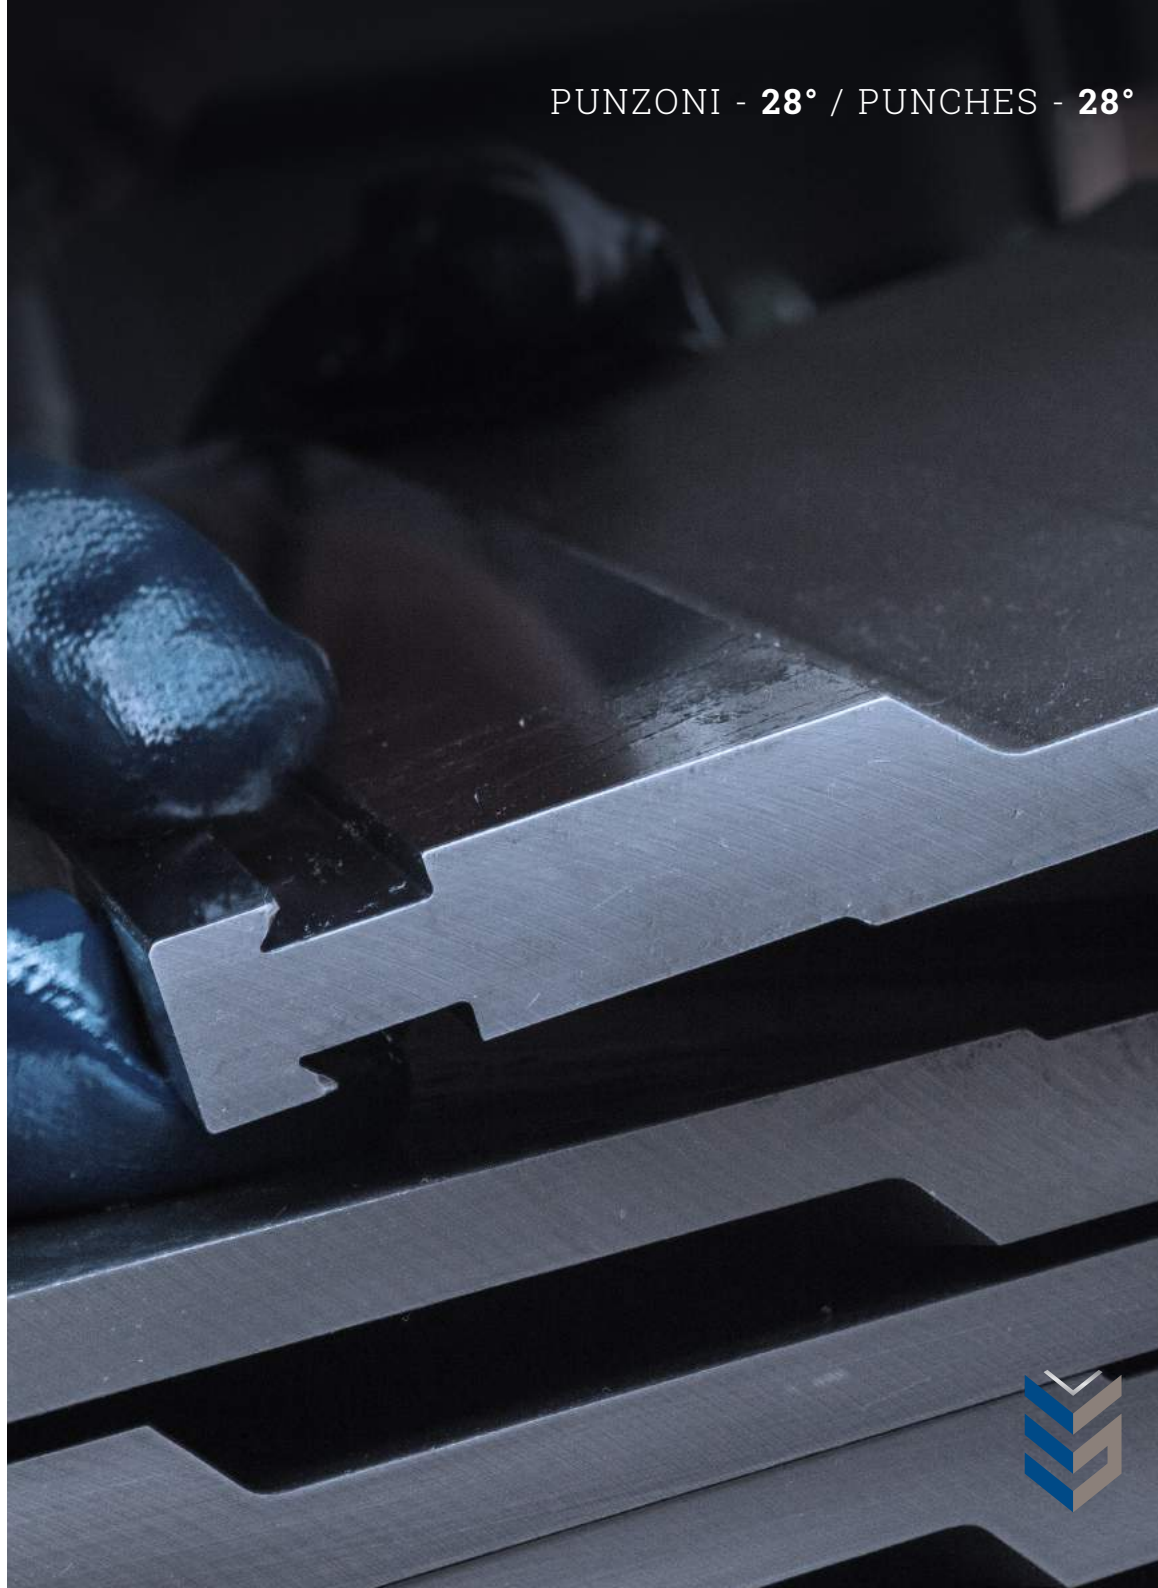


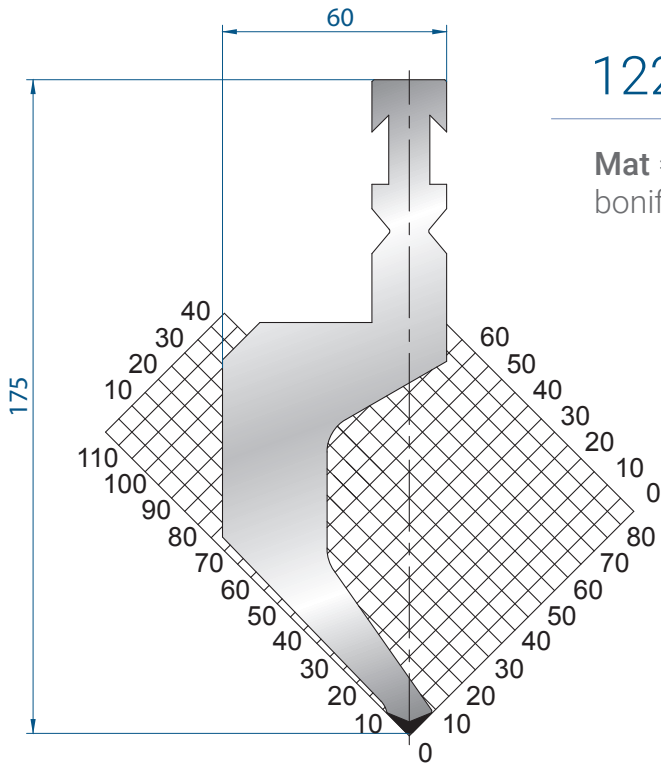

1227

Mat = C45
bonificato / tempered
H = 175.00
Max T/m = 50
α = 88°
R = 1.5

1000 mm	33,0 kg
500 mm	16,0 kg
1100 mm FRAZ. / SECT.	33,0 kg
100 mm	3,2 kg

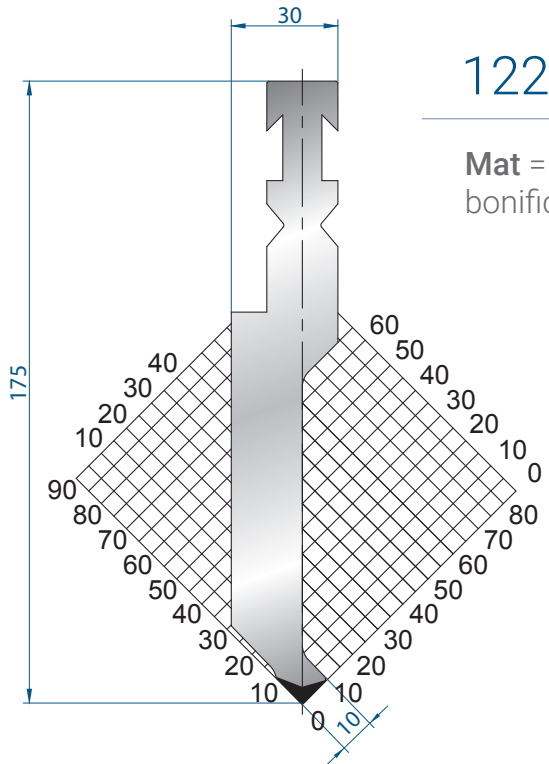

1229


Mat = C45
bonificato / tempered
H = 175.00
Max T/m = 100
α = 88°
R = 1

1000 mm	26,0 kg
500 mm	13,0 kg
1100 mm FRAZ. / SECT.	26,0 kg
100 mm	2,6 kg



BYSTRONIC
RF-A STYLE




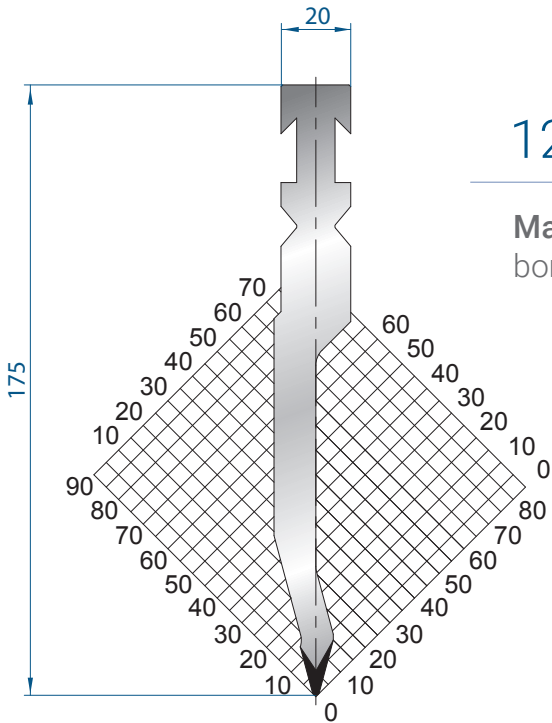

1230

Mat = C45
bonificato / tempered
H = 175.00
Max T/m = 80
α = 30°
R = 1

1000 mm	16,0 kg
500 mm	8,0 kg
1100 mm FRAZ. / SECT.	16,0 kg
100 mm	1,6 kg

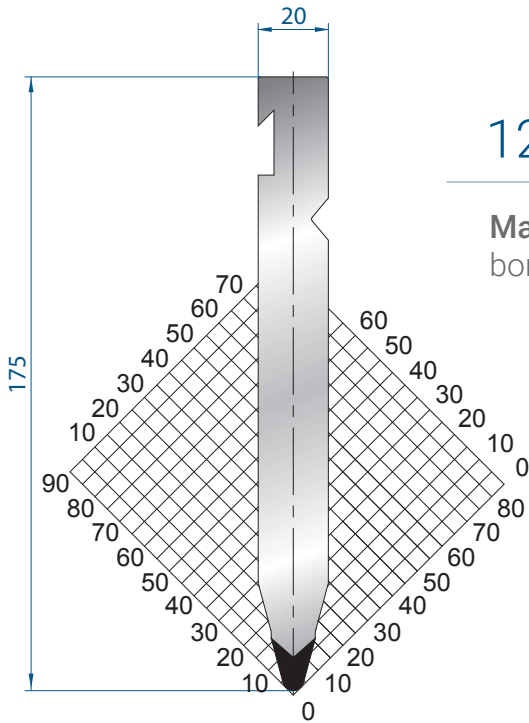


1231

Mat = C45
bonificato / tempered
H = 175.00
Max T/m = 100
α = 30°
R = 3

1000 mm	25,0 kg
500 mm	12,0 kg
1100 mm FRAZ. / SECT.	25,0 kg
100 mm	2,4 kg



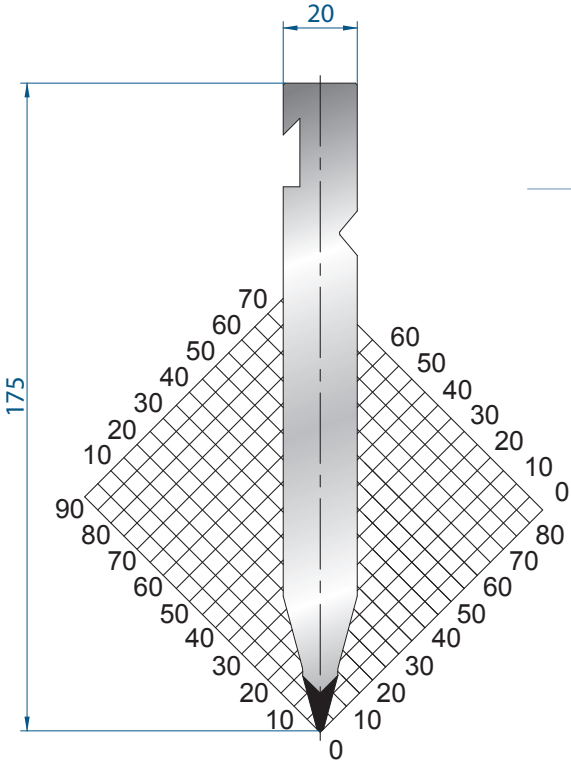

1232

Mat = C45
bonificato / tempered
H = 175.00
Max T/m = 100
α = 30°
R = 1

1000 mm	25,0 kg
500 mm	12,0 kg
1100 mm FRAZ. / SECT.	25,0 kg
100 mm	2,4 kg