


500-550 Frazionato (Bonificato) / Sectioned (Quenched)

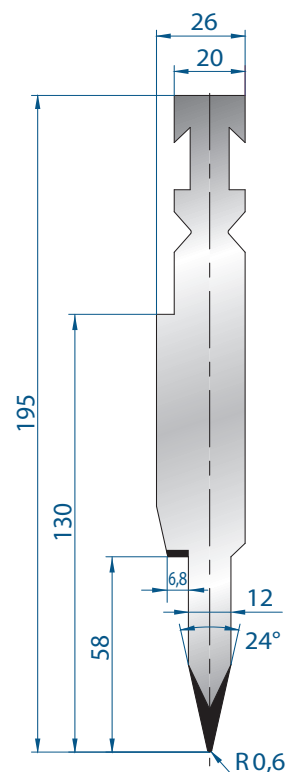


1254

Mat = C45
bonificato / tempered
Max T/m = 80

500 mm	14,0 kg
1100 mm FRAZ. / SECT.	14,0 kg
100 mm	2,8 kg


Spessore:
Max 1,5 mm Ferro
Thickness
Max 1,5 mm Mild steel

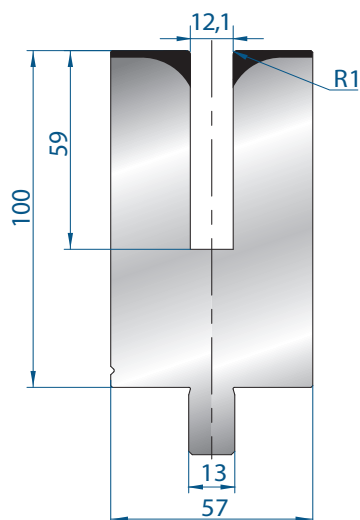


3175

Mat = C45
bonificato / tempered
Max T/m = 50

500 mm	20,0 kg
550 mm FRAZ. / SECT.	20,0 kg
100 mm	4,0 kg

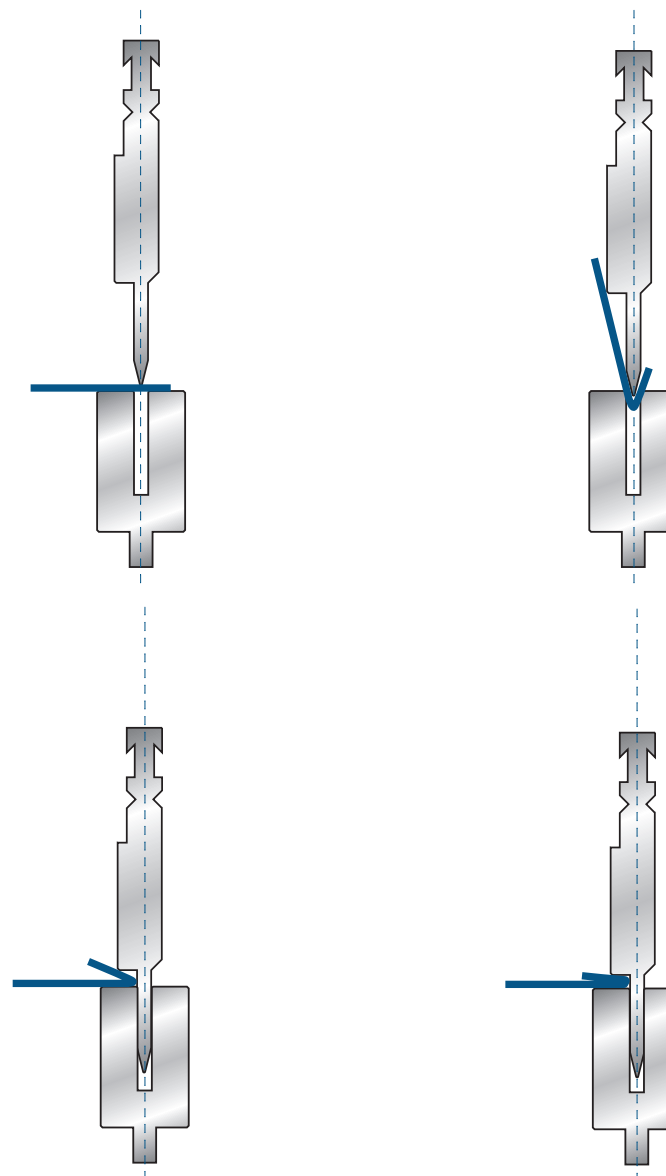

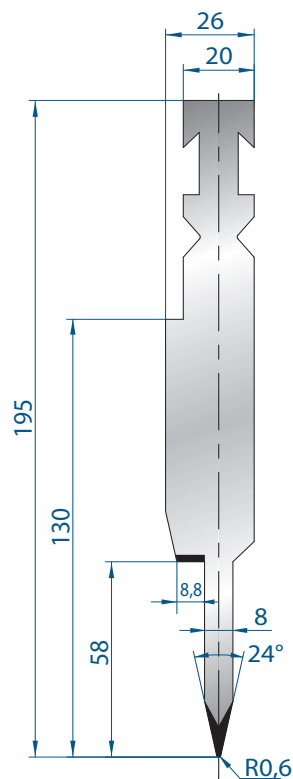


1252

Mat = C45
bonificato / tempered
Max T/m = 80

500 mm	13,0 kg
1100 mm FRAZ. / SECT.	13,0 kg
100 mm	2,6 kg

Spessore:
Max 1,2 mm Ferro
Thickness
Max 1,2 mm Mild steel

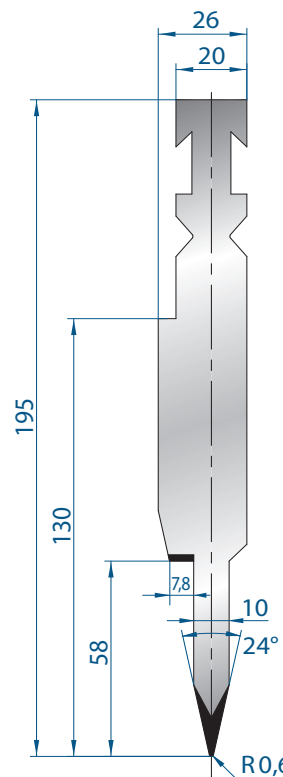


1253

Mat = C45
bonificato / tempered
Max T/m = 80

500 mm	13,0 kg
1100 mm FRAZ. / SECT.	13,0 kg
100 mm	2,6 kg


Spessore:
Max 1,5 mm Ferro
Thickness
Max 1,5 mm Mild steel

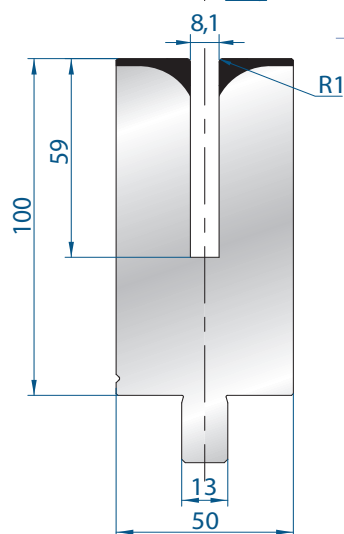

3157

Mat = C45
bonificato / tempered
Max T/m = 50

500 mm	21,0 kg
550 mm FRAZ. / SECT.	21,0 kg
100 mm	4,2 kg

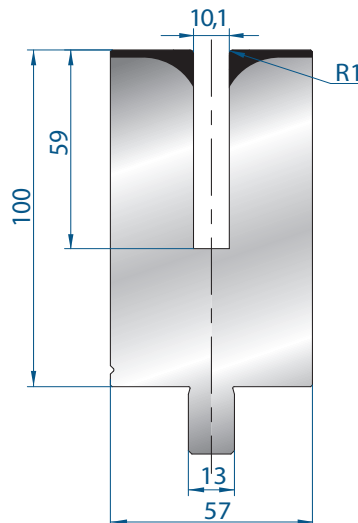



3174

Mat = C45
bonificato / tempered
Max T/m = 50

500 mm	20,0 kg
550 mm FRAZ. / SECT.	20,0 kg
100 mm	4,0 kg



... sau, cu un adaptor 4303:

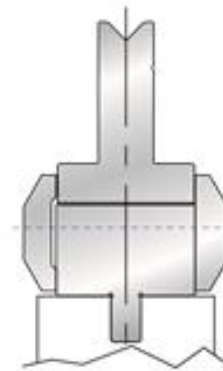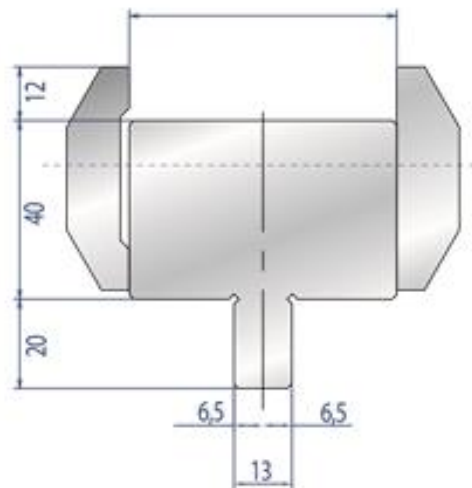


4303

Bystronic / Trumpf - Amada

835 mm	25,0 kg
415 mm	12,0 kg

... folosim sistemul AMADA


Vezi urmatoarele pagini

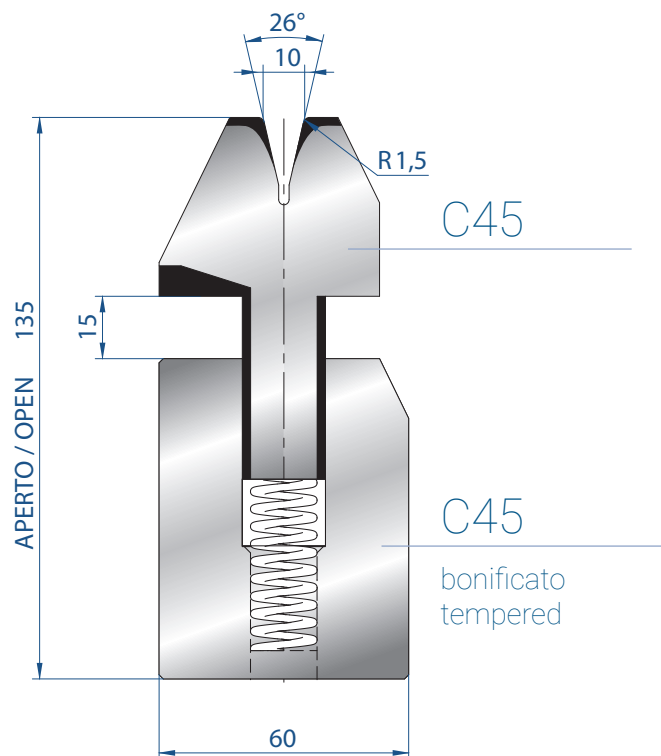

3038

Spessore:
da 1,5 mm a 2,5 mm
Sheet metal thickness:
from 1,5 to 2,5 mm
Max T/m = 100


835 mm	42,0 kg
415 mm	21,0 kg

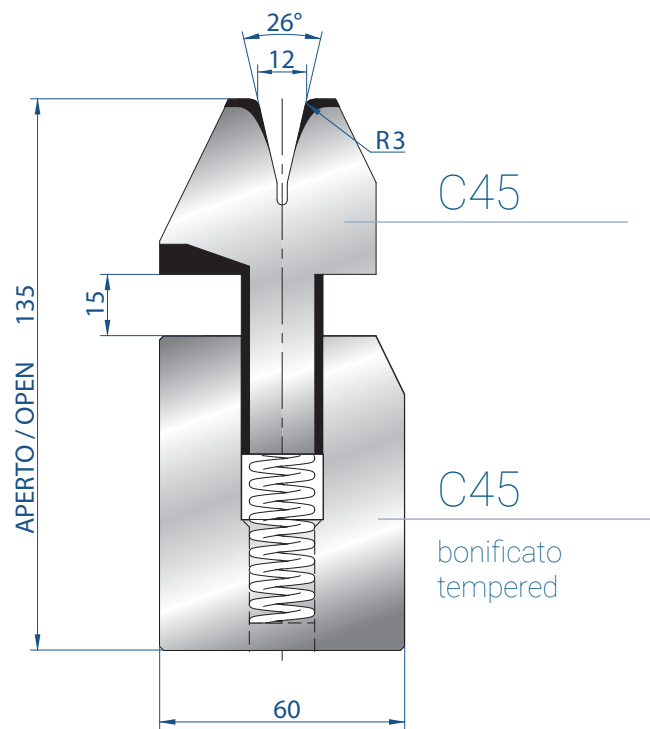

3040

Spessore:
da 1,5 mm a 3,0 mm
Sheet metal thickness:
from 1,5 to 3,0 mm
Max T/m = 100

835 mm	42,0 kg
415 mm	21,0 kg

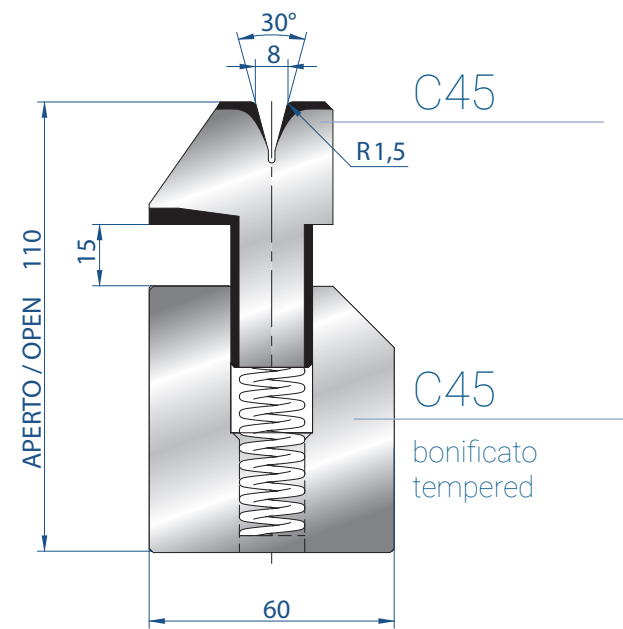


3041

Spessore:
max 1,5 mm
Sheet metal thickness:
max 1,5 mm
Max T/m = 80

835 mm	34,0 kg
415 mm	17,0 kg




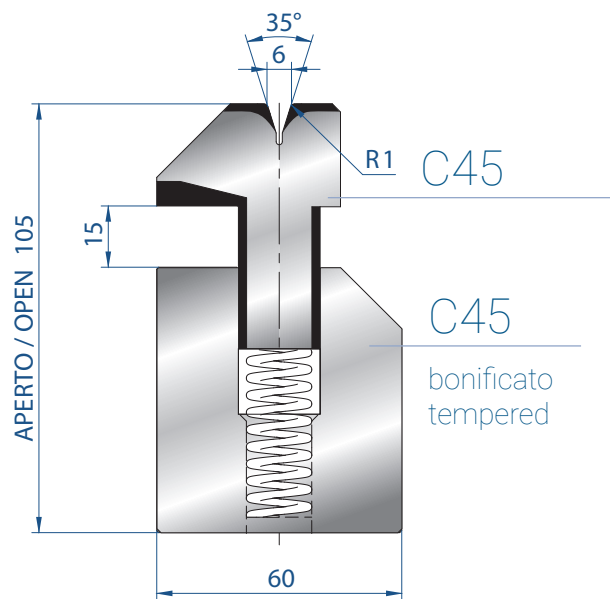

3039

Spessore:
max 1,0 mm
Sheet metal thickness:
max 1,0 mm
Max T/m = 80


835 mm	32,0 kg
415 mm	16,0 kg

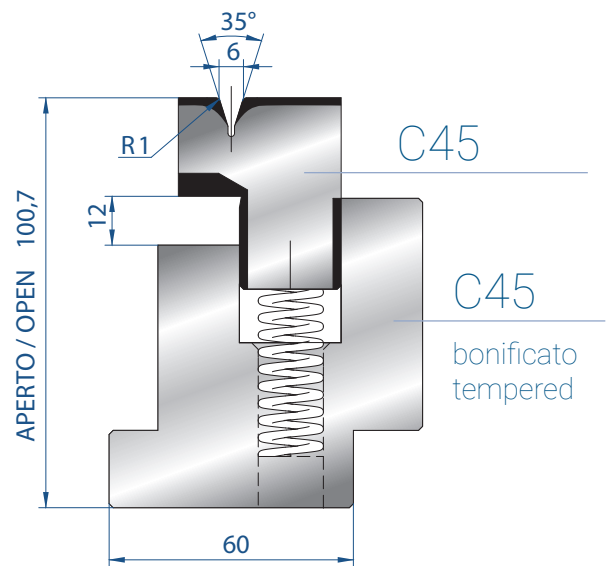

3037 / 6

Spessore:
max 1,0 mm
Sheet metal thickness:
max 1,0 mm
Max T/m = 60

835 mm	34,0 kg
415 mm	17,0 kg

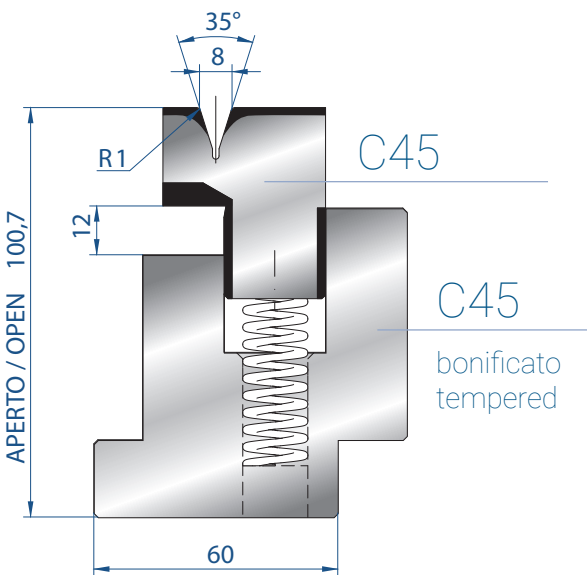

3037 / 8


Spessore:
max 1,2 mm
Sheet metal thickness:
max 1,2 mm
Max T/m = 60

835 mm	34,0 kg
415 mm	17,0 kg




TONNELLAGGI PER SCHIACCIATURA HEMMING POWER

Ferro normale R.45 Kg/mm² / Mild Steel R.45 Kg/mm²

				
S mm	A mm	Ton /M	2xS	Ton /M
0,6	3	9	1,2	23
0,8	3	12	1,6	32
1	3,5	15	2	40
1,25	3,5	17	2,5	50
1,5	4,6	22	3	63
2	5,5	30	4	80
2,5	6,5	55	5	90
3	8	70	6	100


Inox R.70 Kg/mm² / Stainless Steel R.70 Kg/mm²

				
S mm	A mm	Ton /M	2xS	Ton /M
0,6	3	15	1,2	35
0,8	3	20	1,6	50
1	3,5	25	2	60
1,25	3,5	26	2,5	80
1,5	4,6	38	3	95
2	5,5	50	4	130



4313

4,0 kg

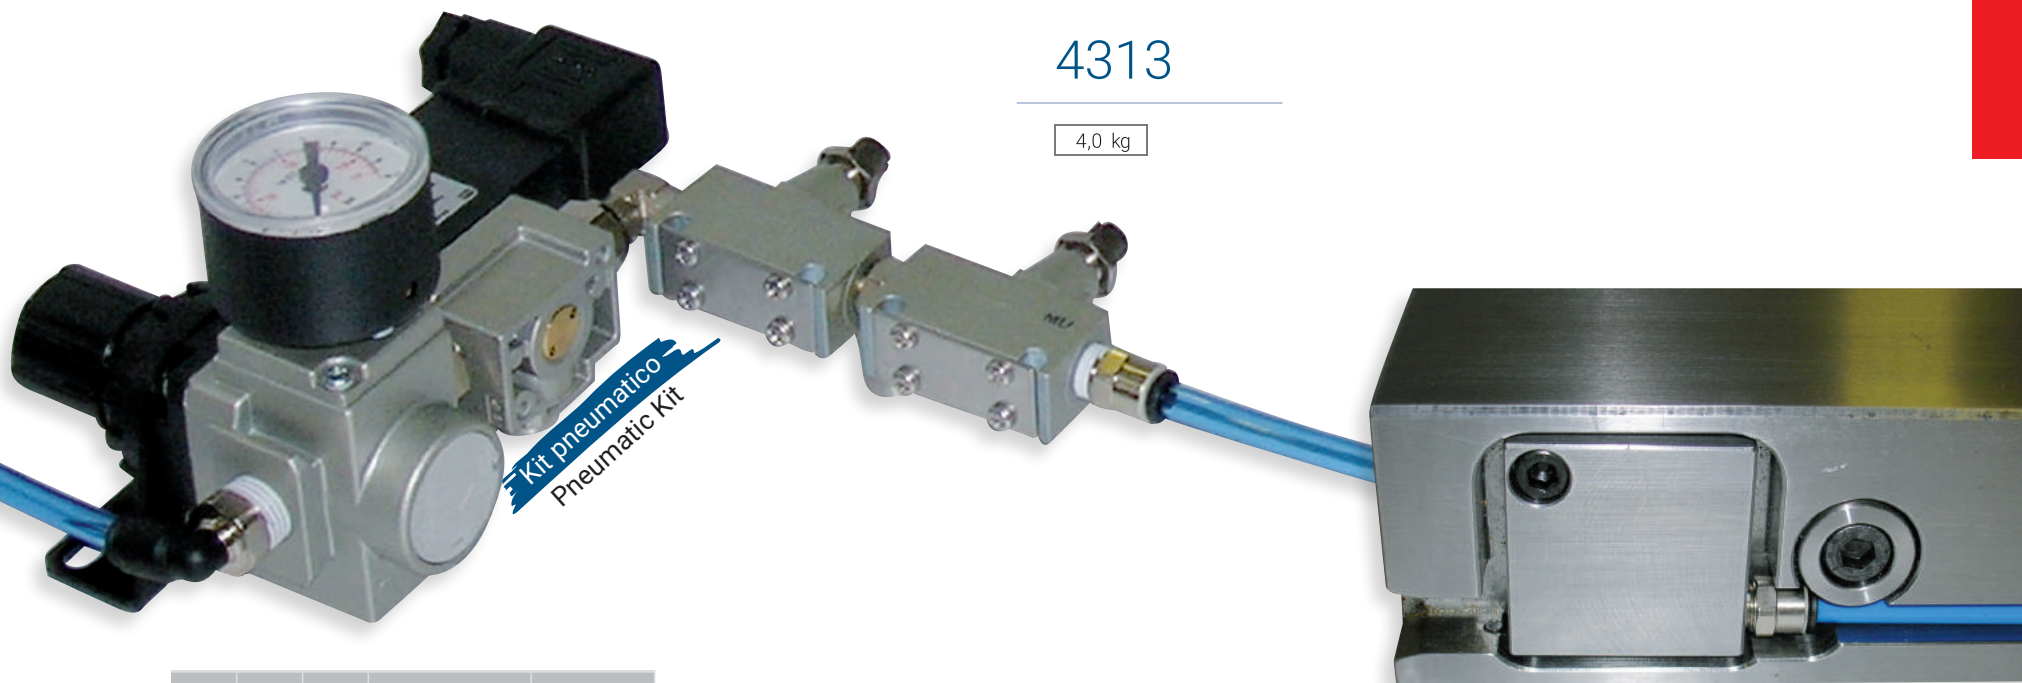

Kit pneumatico
Pneumatic Kit

	V	A	R	H aperto/open	Max T/M
3038 PN	10	26°	1,5	135	100

835 mm	42,0 kg
415 mm	21,0 kg

3039 PN	6	35°	1	105	80
----------------	---	-----	---	-----	----

835 mm	32,0 kg
415 mm	16,0 kg

3040 PN	12	26°	3	135	100
----------------	----	-----	---	-----	-----

835 mm	42,0 kg
415 mm	21,0 kg

3041 PN	8	30°	1,5	110	80
----------------	---	-----	-----	-----	----

835 mm	34,0 kg
415 mm	17,0 kg



Raccordo d'ingresso
Input connection

Raccordo intermedio
Intermediate connection

Raccordo finale
Output connection