


## 1295

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 240.00  
**Max T/m** = 40  
**α** = 28°  
**R** = 1

25-30	
35-40 mm	1,9 kg
45-50	
100 mm	4,0 kg
SCARP. / HORN	
100 mm	4,8 kg
200 mm	9,5 kg
300 mm	14,3 kg
500 mm	23,8 kg
550 mm	23,8 kg
FRAZ. / SECT.	
1050 mm	50,4 kg
FRAZ. B / SECT. B	
1250 mm	60,0 kg
FRAZ. B / SECT. B	
2050 mm	98,4 kg
FRAZ. B / SECT. B	
2550 mm	122,4 kg
FRAZ. B / SECT. B	
3050 mm	146,4 kg
FRAZ. B / SECT. B	
4050 mm	194,4 kg
FRAZ. B / SECT. B	

↓  
**SPINTA LATERALE**  
SHOULDER LOAD

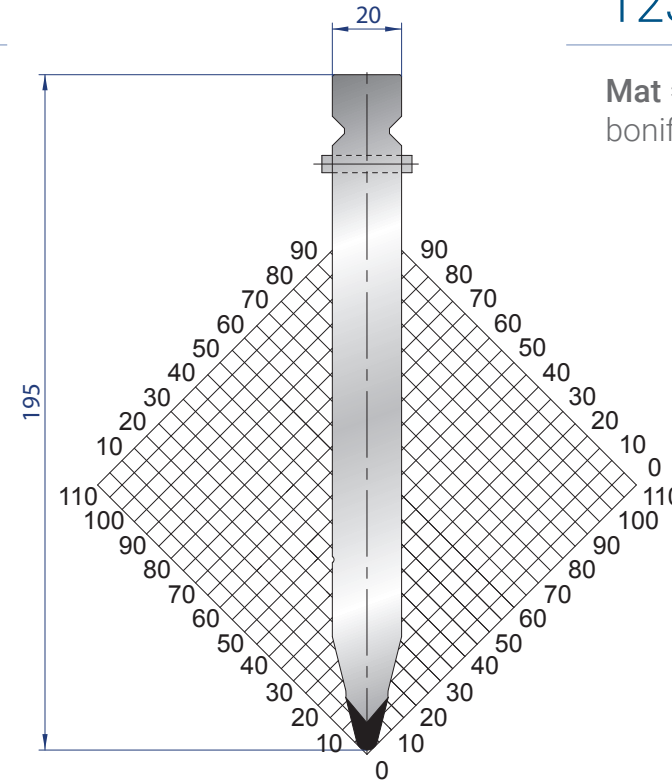


## 1237

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 195.00  
**Max T/m** = 100  
**α** = 28°  
**R** = 3

25-30	
35-40 mm	1,4 kg
45-50	
100 mm	1,1 kg
SCARP. / HORN	
100 mm	2,5 kg
200 mm	2,8 kg
300 mm	5,6 kg
500 mm	8,4 kg
550 mm	14,0 kg
FRAZ. / SECT.	
1050 mm	15,4 kg
FRAZ. B / SECT. B	
1250 mm	29,4 kg
FRAZ. B / SECT. B	
2050 mm	35,0 kg
FRAZ. B / SECT. B	
2550 mm	57,4 kg
FRAZ. B / SECT. B	
3050 mm	71,4 kg
FRAZ. B / SECT. B	
4050 mm	85,4 kg
FRAZ. B / SECT. B	




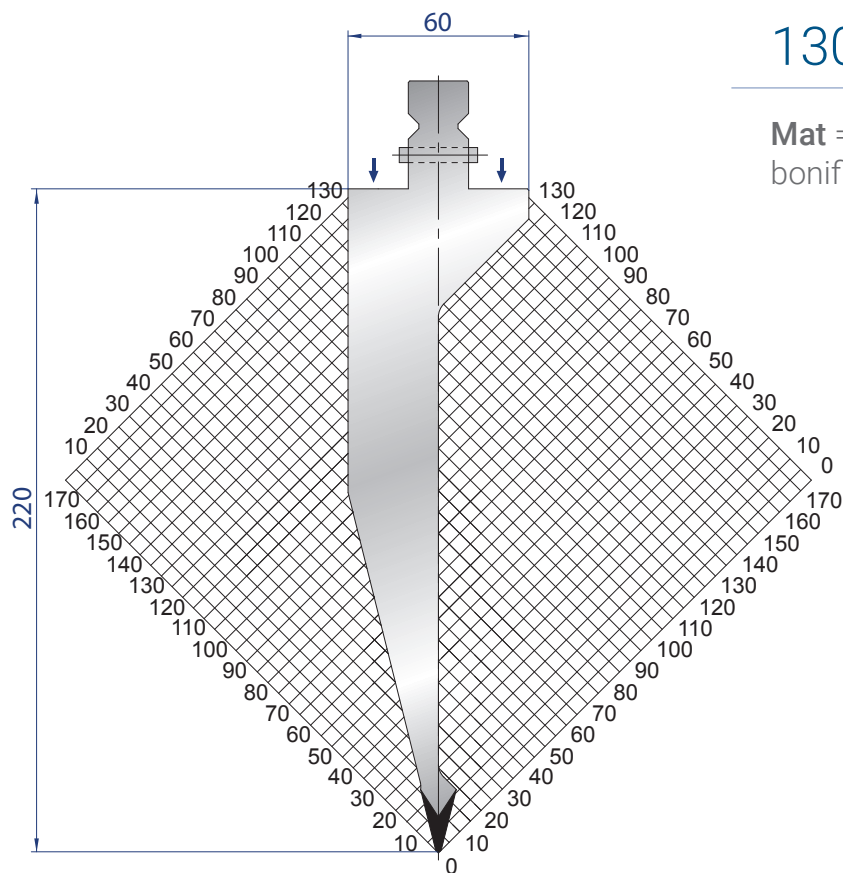

## 1302

**Mat** = 42CrMo4  
 bonificato / tempered  
**H** = 220.00  
**Max T/m** = 80  
 $\alpha$  = 28°  
**R** = 1

25-30	
35-40 mm	2,0 kg
45-50	
100 mm	4,5 kg
100 mm	5,0 kg
200 mm	10,0 kg
300 mm	15,0 kg
500 mm	25,0 kg
550 mm	27,5 kg
1050 mm	52,5 kg
1250 mm	62,5 kg
2050 mm	102,5 kg
2550 mm	127,5 kg
3050 mm	152,5 kg
4050 mm	202,5 kg

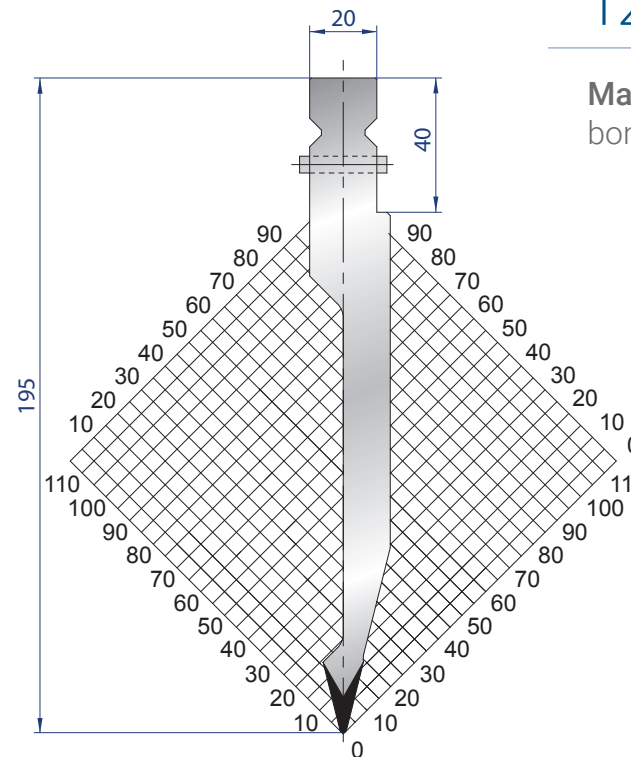

## 1238


**Mat** = 42CrMo4  
 bonificato / tempered  
**H** = 195.00  
**Max T/m** = 80  
 $\alpha$  = 28°  
**R** = 1

25-30	
35-40 mm	0,9 kg
45-50	
100 mm	1,9 kg
100 mm	2,3 kg
200 mm	4,6 kg
300 mm	6,9 kg
500 mm	11,5 kg
550 mm	12,6 kg
1050 mm	24,1 kg
1250 mm	28,7 kg
2050 mm	47,1 kg
2550 mm	58,6 kg
3050 mm	70,0 kg
4050 mm	93,0 kg

↓  
**SPINTA LATERALE**  
 SHOULDER LOAD

## 1308

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 140.00  
**Max T/m** = 40  
 **$\alpha$**  = 28°  
**R** = 1

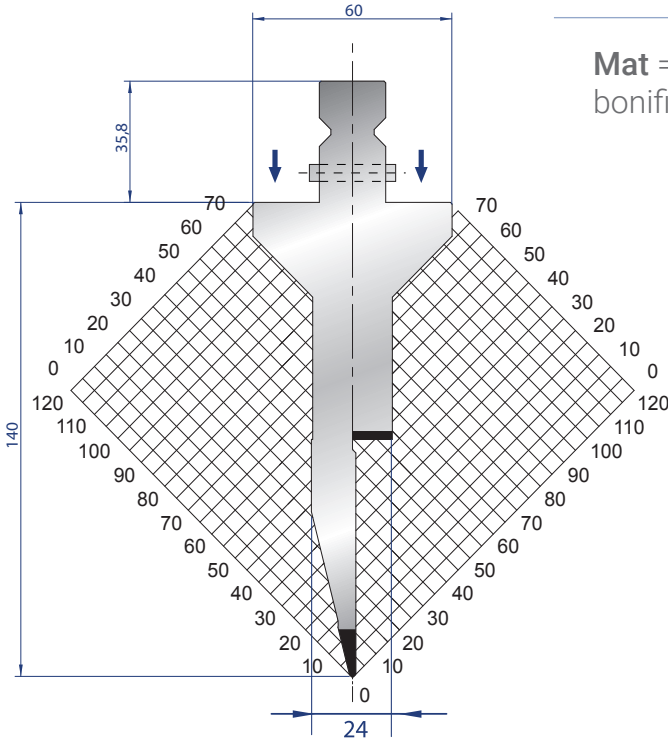


25-30		
35-40 mm		1,1 kg
45-50		
100 mm	SCARP. / HORN	2,7 kg
100 mm		2,9 kg
200 mm		5,8 kg
300 mm		8,7 kg
500 mm		14,5 kg
550 mm	FRAZ. / SECT.	15,9 kg
1050 mm	FRAZ. B / SECT. B	30,4 kg
1250 mm	FRAZ. B / SECT. B	36,2 kg
2050 mm	FRAZ. B / SECT. B	59,4 kg
2550 mm	FRAZ. B / SECT. B	73,9 kg
3050 mm	FRAZ. B / SECT. B	88,4 kg
4050 mm	FRAZ. B / SECT. B	117,4 kg

↓  
**SPINTA LATERALE**  
SHOULDER LOAD


## 1313

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 157.00  
**Max T/m** = 80  
 **$\alpha$**  = 28°  
**R** = 1

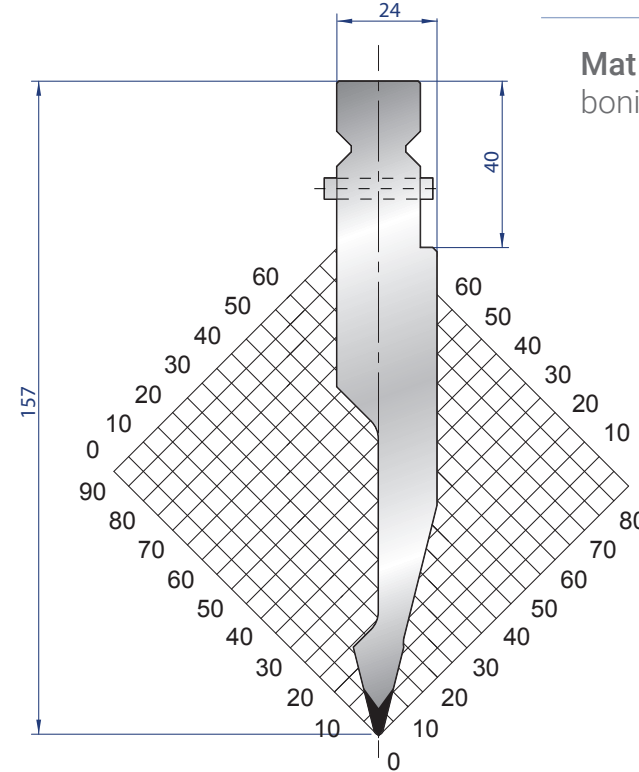

25-30		
35-40 mm		0,8 kg
45-50		
100 mm	SCARP. / HORN	1,8 kg
100 mm		2,0 kg
200 mm		4,0 kg
300 mm		6,0 kg
500 mm		10,0 kg
550 mm	FRAZ. / SECT.	11,0 kg
1050 mm	FRAZ. B / SECT. B	21,0 kg
1250 mm	FRAZ. B / SECT. B	25,0 kg
2050 mm	FRAZ. B / SECT. B	41,0 kg
2550 mm	FRAZ. B / SECT. B	51,0 kg
3050 mm	FRAZ. B / SECT. B	61,0 kg
4050 mm	FRAZ. B / SECT. B	81,0 kg




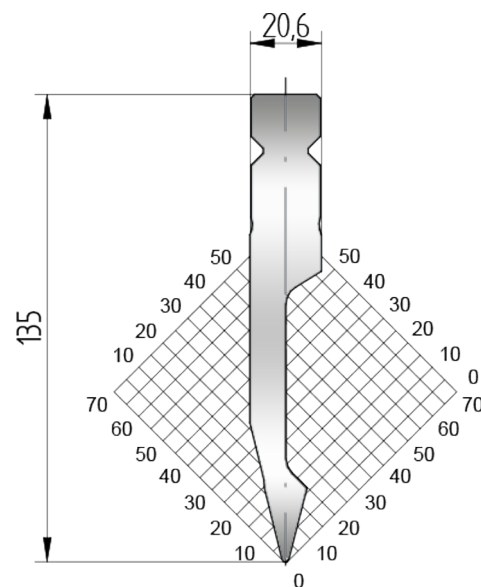

1325

**Mat** = 42CrMo4  
 bonificato / tempered  
**H** = 135.00  
**Max T/m** = 100  
 **$\alpha$**  = 28°  
**R** = 1


515 mm	7,2 kg
550 mm FRAZ. / SECT.	7,3 kg

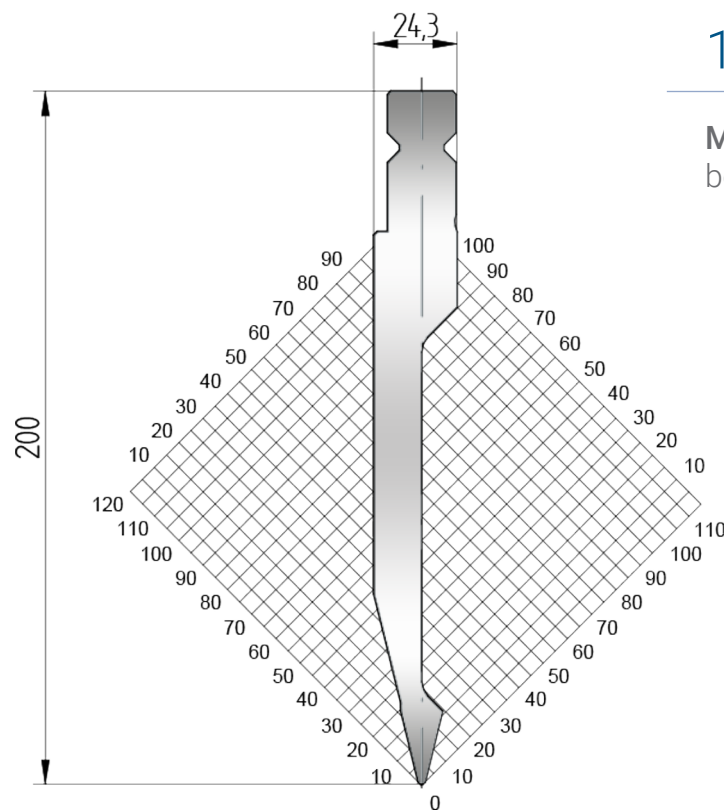

1326

**Mat** = 42CrMo4  
 bonificato / tempered  
**H** = 200.00  
**Max T/m** = 100  
 **$\alpha$**  = 28°  
**R** = 1

515 mm	12,1 kg
550 mm FRAZ. / SECT.	12,1 kg

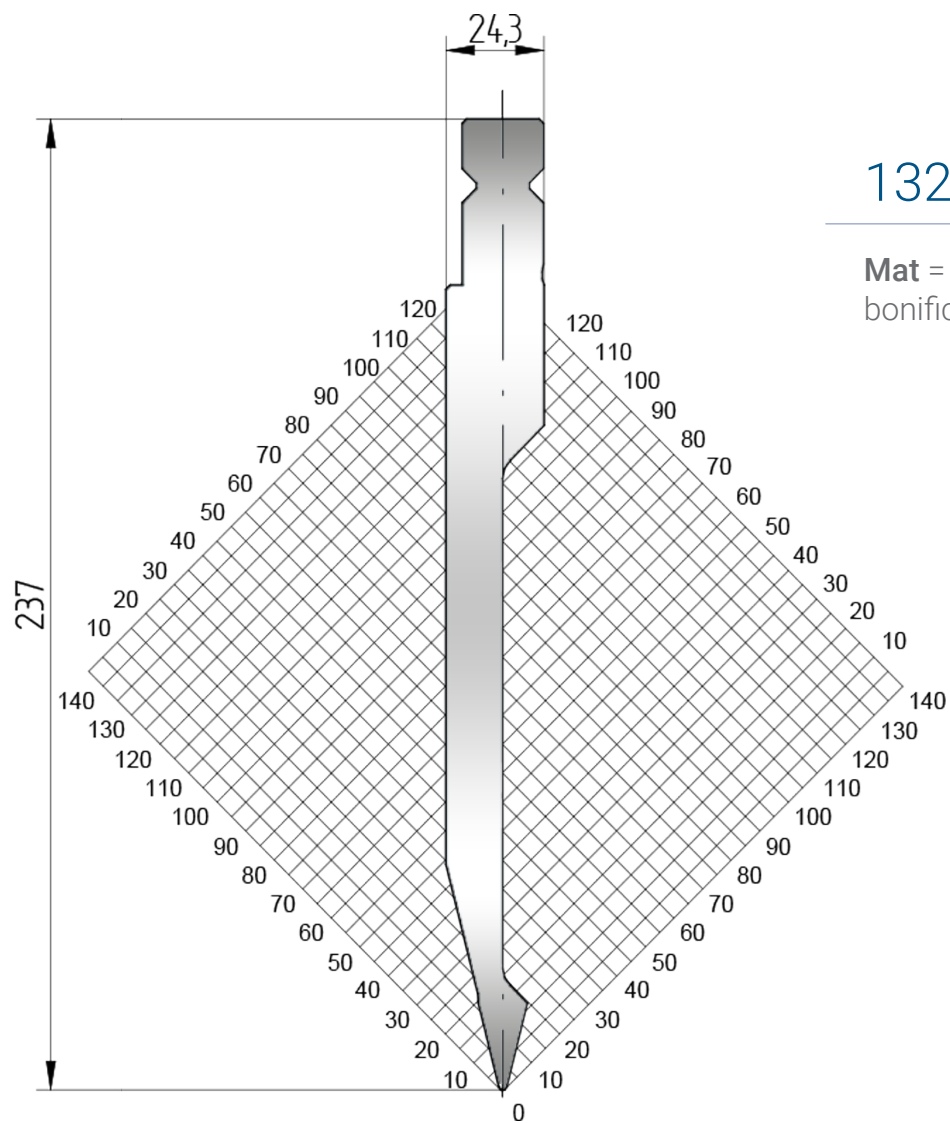

1327

**Mat** = 42CrMo4  
 bonificato / tempered  
**H** = 135.00  
**Max T/m** = 100  
 $\alpha$  = 28°  
**R** = 1

515 mm	14,7 kg
550 mm FRAZ. / SECT.	14,7 kg