


## 1303

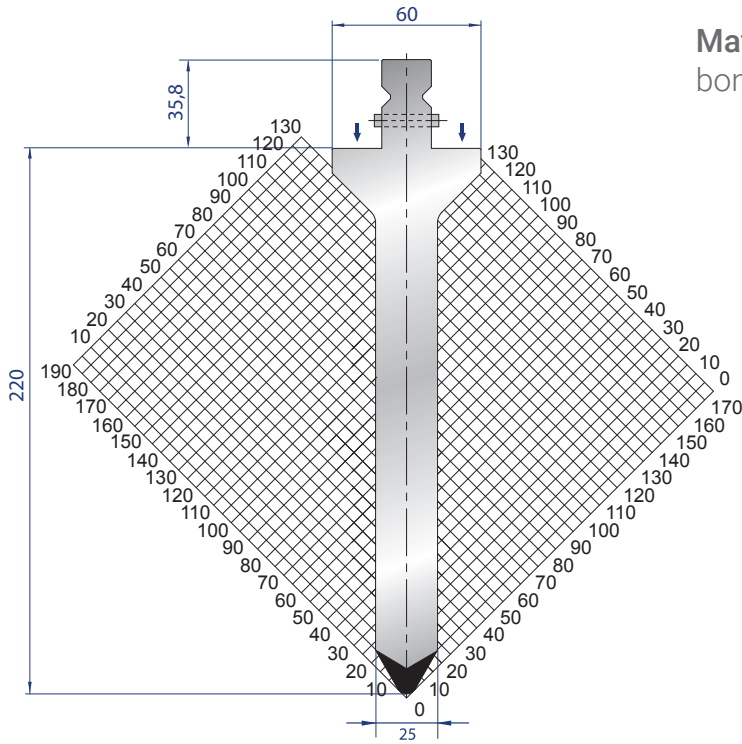


**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 220.00  
**Max T/m** = 100  
 **$\alpha$**  = 60°  
**R** = 4

25-30	
35-40 mm	2,0 kg
45-50	
100 mm	4,6 kg
SCARP. / HORN	
100 mm	5,2 kg
200 mm	10,4 kg
300 mm	15,6 kg
500 mm	26,0 kg
550 mm	28,6 kg
FRAZ. / SECT.	
1050 mm	54,6 kg
FRAZ. B / SECT.B	
1250 mm	65,0 kg
FRAZ. B / SECT.B	
2050 mm	106,6 kg
FRAZ. B / SECT.B	
2550 mm	132,6 kg
FRAZ. B / SECT.B	
3050 mm	158,6 kg
FRAZ. B / SECT.B	
4050 mm	210,6 kg
FRAZ. B / SECT.B	

(↓)  
**SPINTA LATERALE**  
SHOULDER LOAD


## 1318

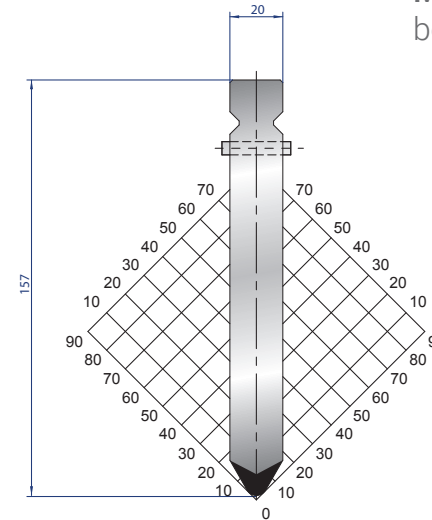

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 157.00  
**Max T/m** = 100  
 **$\alpha$**  = 60°  
**R** = 4

25-30	
35-40 mm	1,0 kg
45-50	
100 mm	2,5 kg
SCARP. / HORN	
100 mm	2,7 kg
200 mm	5,4 kg
300 mm	8,1 kg
500 mm	13,5 kg
550 mm	14,9 kg
FRAZ. / SECT.	
1050 mm	28,3 kg
FRAZ. B / SECT.B	
1250 mm	33,7 kg
FRAZ. B / SECT.B	
2050 mm	55,3 kg
FRAZ. B / SECT.B	
2550 mm	68,8 kg
FRAZ. B / SECT.B	
3050 mm	82,3 kg
FRAZ. B / SECT.B	
4050 mm	109,3 kg
FRAZ. B / SECT.B	



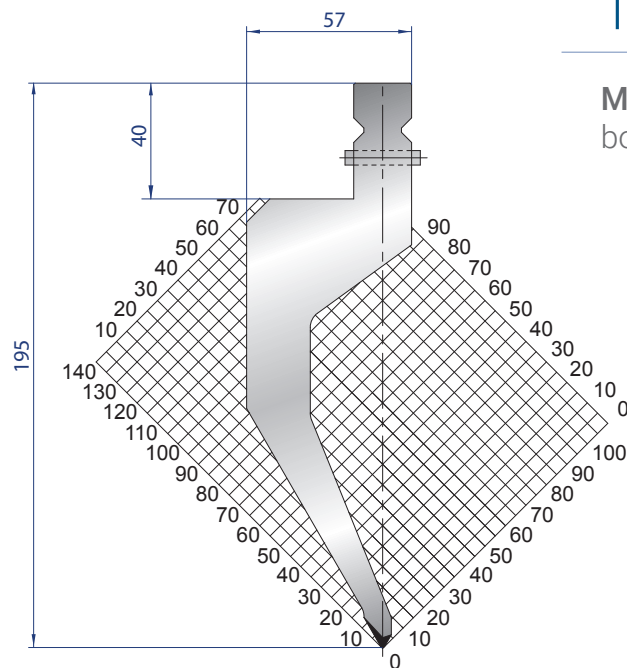

1236

**Mat** = 42CrMo4  
bonificato / tempered

**H** = 195.00

**Max T/m** = 40

**$\alpha$**  = 60°

**R** = 0.8

25-30	
35-40 mm	1,4 kg
45-50	
100 mm	3,0 kg
SCARP / HORN	
100 mm	3,5 kg
200 mm	7,0 kg
300 mm	10,5 kg
500 mm	17,5 kg
550 mm	19,2 kg
FRAZ. / SECT.	
1050 mm	36,7 kg
FRAZ. B. / SECT. B.	
1250 mm	43,7 kg
FRAZ. B. / SECT. B.	
2050 mm	71,7 kg
FRAZ. B. / SECT. B.	
2550 mm	89,2 kg
FRAZ. B. / SECT. B.	
3050 mm	106,7 kg
FRAZ. B. / SECT. B.	
4050 mm	104,7 kg
FRAZ. B. / SECT. B.	