

## 1319


Mat = 42CrMo4  
bonificato / tempered

H = 177.00

Max T/m = 20

$\alpha = 80^\circ$

R = 0.5

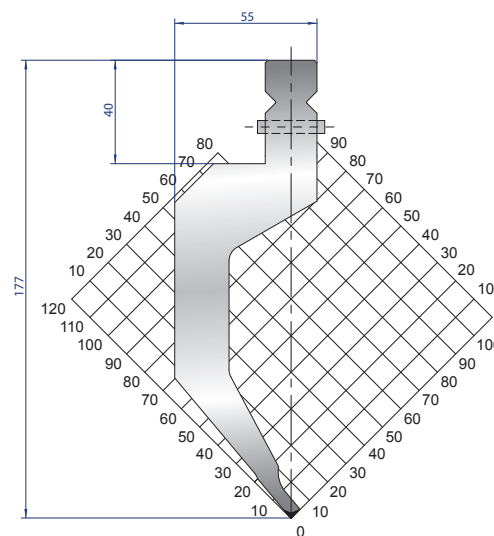

25-30	
35-40 mm	1,2 kg
45-50	
100 mm	2,9 kg
SCARP. / HORN	3,1 kg
200 mm	6,2 kg
300 mm	9,3 kg
500 mm	15,4 kg
550 mm	17,0 kg
FRAZ. / SECT.	
1050 mm	32,5 kg
FRAZ. B / SECT. B	
1250 mm	38,7 kg
FRAZ. B / SECT. B	
2050 mm	63,5 kg
FRAZ. B / SECT. B	
2550 mm	79,0 kg
FRAZ. B / SECT. B	
3050 mm	94,5 kg
FRAZ. B / SECT. B	
4050 mm	125,5 kg
FRAZ. B / SECT. B	