


1294

Mat = 42CrMo4  
bonificato / tempered  
H = 220.00  
Max T/m = 85  
 $\alpha = 86^\circ$   
R = 1

25-30	
35-40 mm	2,5 kg
45-50	
100 mm	6,0 kg
100 mm	6,4 kg
200 mm	12,8 kg
300 mm	19,2 kg
500 mm	32,0 kg
550 mm	35,2 kg
1050 mm	67,2 kg
1250 mm	80,0 kg
2050 mm	131,0 kg
2550 mm	163,2 kg
3050 mm	195,2 kg
4050 mm	259,2 kg

(↓)  
SPINTA LATERALE  
SHOULDER LOAD

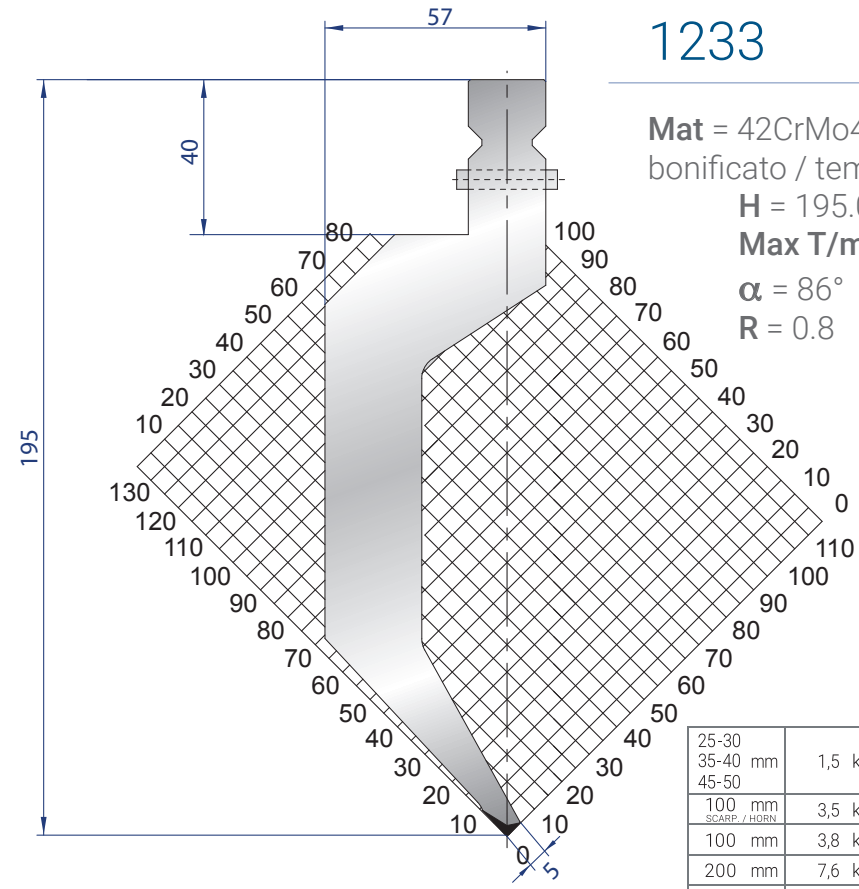


1233

Mat = 42CrMo4  
bonificato / tempered  
H = 195.00  
Max T/m = 40  
 $\alpha = 86^\circ$   
R = 0.8

25-30	
35-40 mm	1,5 kg
45-50	
100 mm	3,5 kg
100 mm	3,8 kg
200 mm	7,6 kg
300 mm	11,4 kg
500 mm	19,0 kg
550 mm	20,9 kg
1050 mm	39,9 kg
1250 mm	47,5 kg
2050 mm	77,9 kg
2550 mm	96,9 kg
3050 mm	115,9 kg
4050 mm	153,9 kg




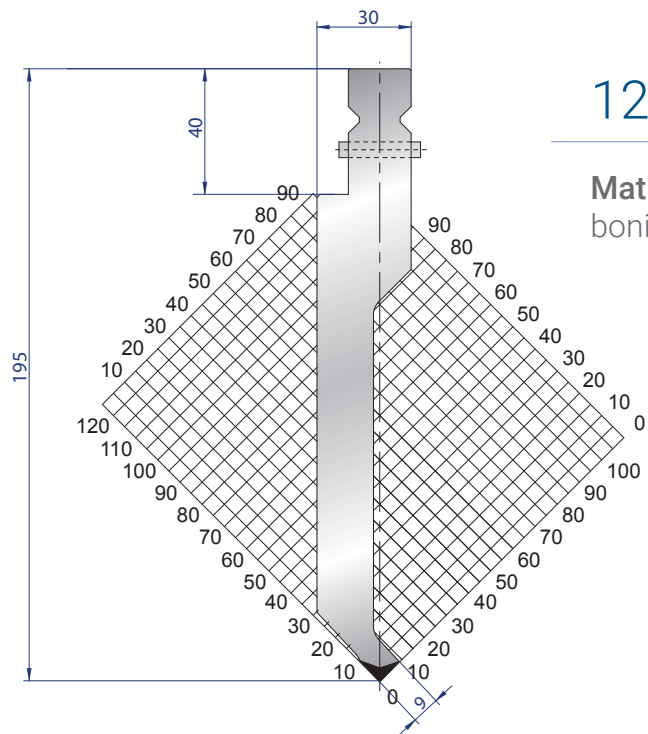

## 1235

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 195.00  
**Max T/m** = 100  
 **$\alpha$**  = 86°  
**R** = 0.8


25-30	
35-40 mm	1,2 kg
45-50	
100 mm	2,7 kg
SCARP / HORN	
100 mm	3,0 kg
200 mm	6,0 kg
300 mm	9,0 kg
500 mm	15,0 kg
550 mm	16,5 kg
FRAZ. B / SECT. B	
1050 mm	31,5 kg
FRAZ. B / SECT. B	
1250 mm	37,5 kg
FRAZ. B / SECT. B	
2050 mm	61,5 kg
FRAZ. B / SECT. B	
2550 mm	76,5 kg
FRAZ. B / SECT. B	
3050 mm	91,5 kg
FRAZ. B / SECT. B	
4050 mm	121,5 kg
FRAZ. B / SECT. B	

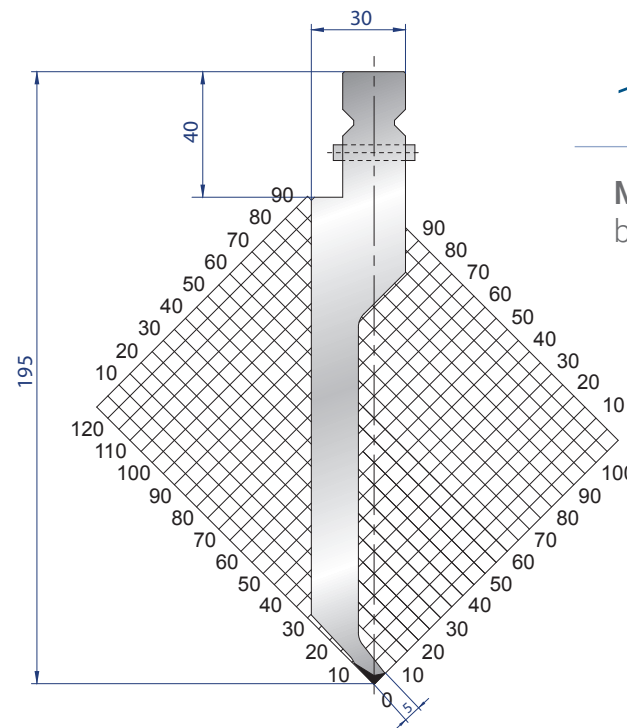

## 1234

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 195.00  
**Max T/m** = 30  
 **$\alpha$**  = 86°  
**R** = 0.6

25-30	
35-40 mm	1,1 kg
45-50	
100 mm	2,7 kg
SCARP / HORN	
100 mm	2,9 kg
200 mm	5,8 kg
300 mm	8,7 kg
500 mm	14,5 kg
550 mm	15,9 kg
FRAZ. B / SECT. B	
1050 mm	30,4 kg
FRAZ. B / SECT. B	
1250 mm	36,2 kg
FRAZ. B / SECT. B	
2050 mm	59,4 kg
FRAZ. B / SECT. B	
2550 mm	73,9 kg
FRAZ. B / SECT. B	
3050 mm	88,4 kg
FRAZ. B / SECT. B	
4050 mm	117,4 kg
FRAZ. B / SECT. B	

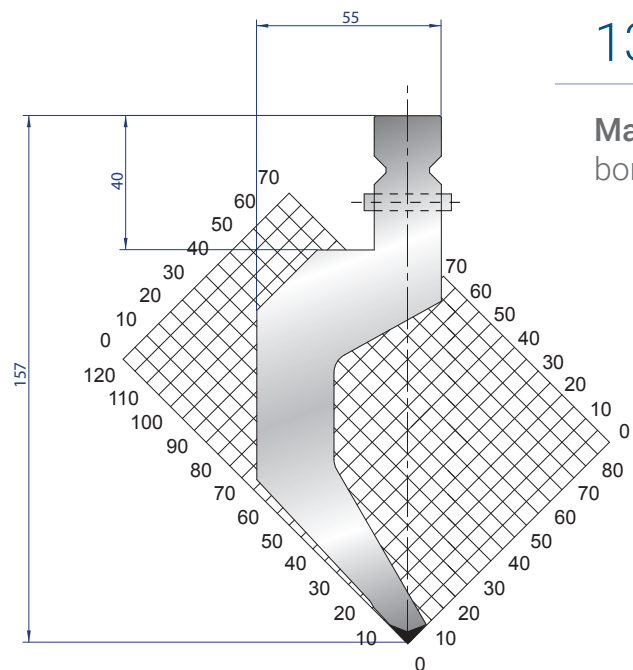


1314

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 157.00  
**Max T/m** = 65  
 **$\alpha$**  = 86°  
**R** = 1

25-30	
35-40 mm	1,2 kg
45-50	
100 mm	2,5 kg
100 mm	3,0 kg
200 mm	6,0 kg
300 mm	9,0 kg
500 mm	15,0 kg
550 mm	16,5 kg
1050 mm	31,5 kg
1250 mm	37,5 kg
2050 mm	kg
2550 mm	76,5 kg
3050 mm	91,5 kg
4050 mm	121,5 kg




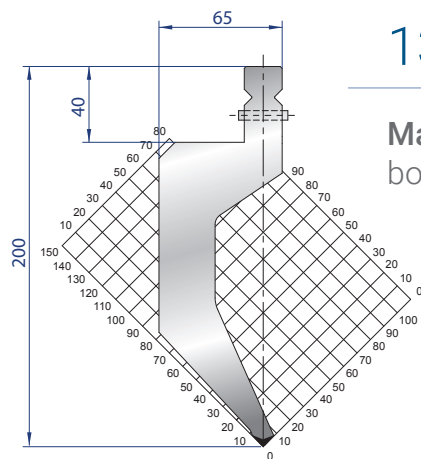

1320

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 200.00  
**Max T/m** = 100  
**α** = 86°  
**R** = 1.5


25-30	
35-40 mm	1,2 kg
45-50	
100 mm SCARP. / HORN	2,8 kg
100 mm	3,1 kg
200 mm	6,2 kg
300 mm	9,3 kg
500 mm	15,4 kg
550 mm FRAZ. / SECT.	17,0 kg
1050 mm FRAZ. B / SECT. B	32,5 kg
1250 mm FRAZ. B / SECT. B	38,7 kg
2050 mm FRAZ. B / SECT. B	63,5 kg
2550 mm FRAZ. B / SECT. B	79,0 kg
3050 mm FRAZ. B / SECT. B	94,5 kg
4050 mm FRAZ. B / SECT. B	125,5 kg

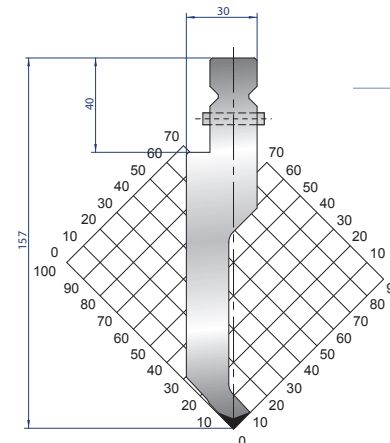

1317

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 157.00  
**Max T/m** = 100  
**α** = 86°  
**R** = 1

25-30	
35-40 mm	0,9 kg
45-50	
100 mm SCARP. / HORN	2,0 kg
100 mm	2,4 kg
200 mm	4,8 kg
300 mm	7,2 kg
500 mm	12,0 kg
550 mm FRAZ. / SECT.	13,2 kg
1050 mm FRAZ. B / SECT. B	25,2 kg
1250 mm FRAZ. B / SECT. B	30,0 kg
2050 mm FRAZ. B / SECT. B	49,2 kg
2550 mm FRAZ. B / SECT. B	61,2 kg
3050 mm FRAZ. B / SECT. B	73,2 kg
4050 mm FRAZ. B / SECT. B	97,2 kg

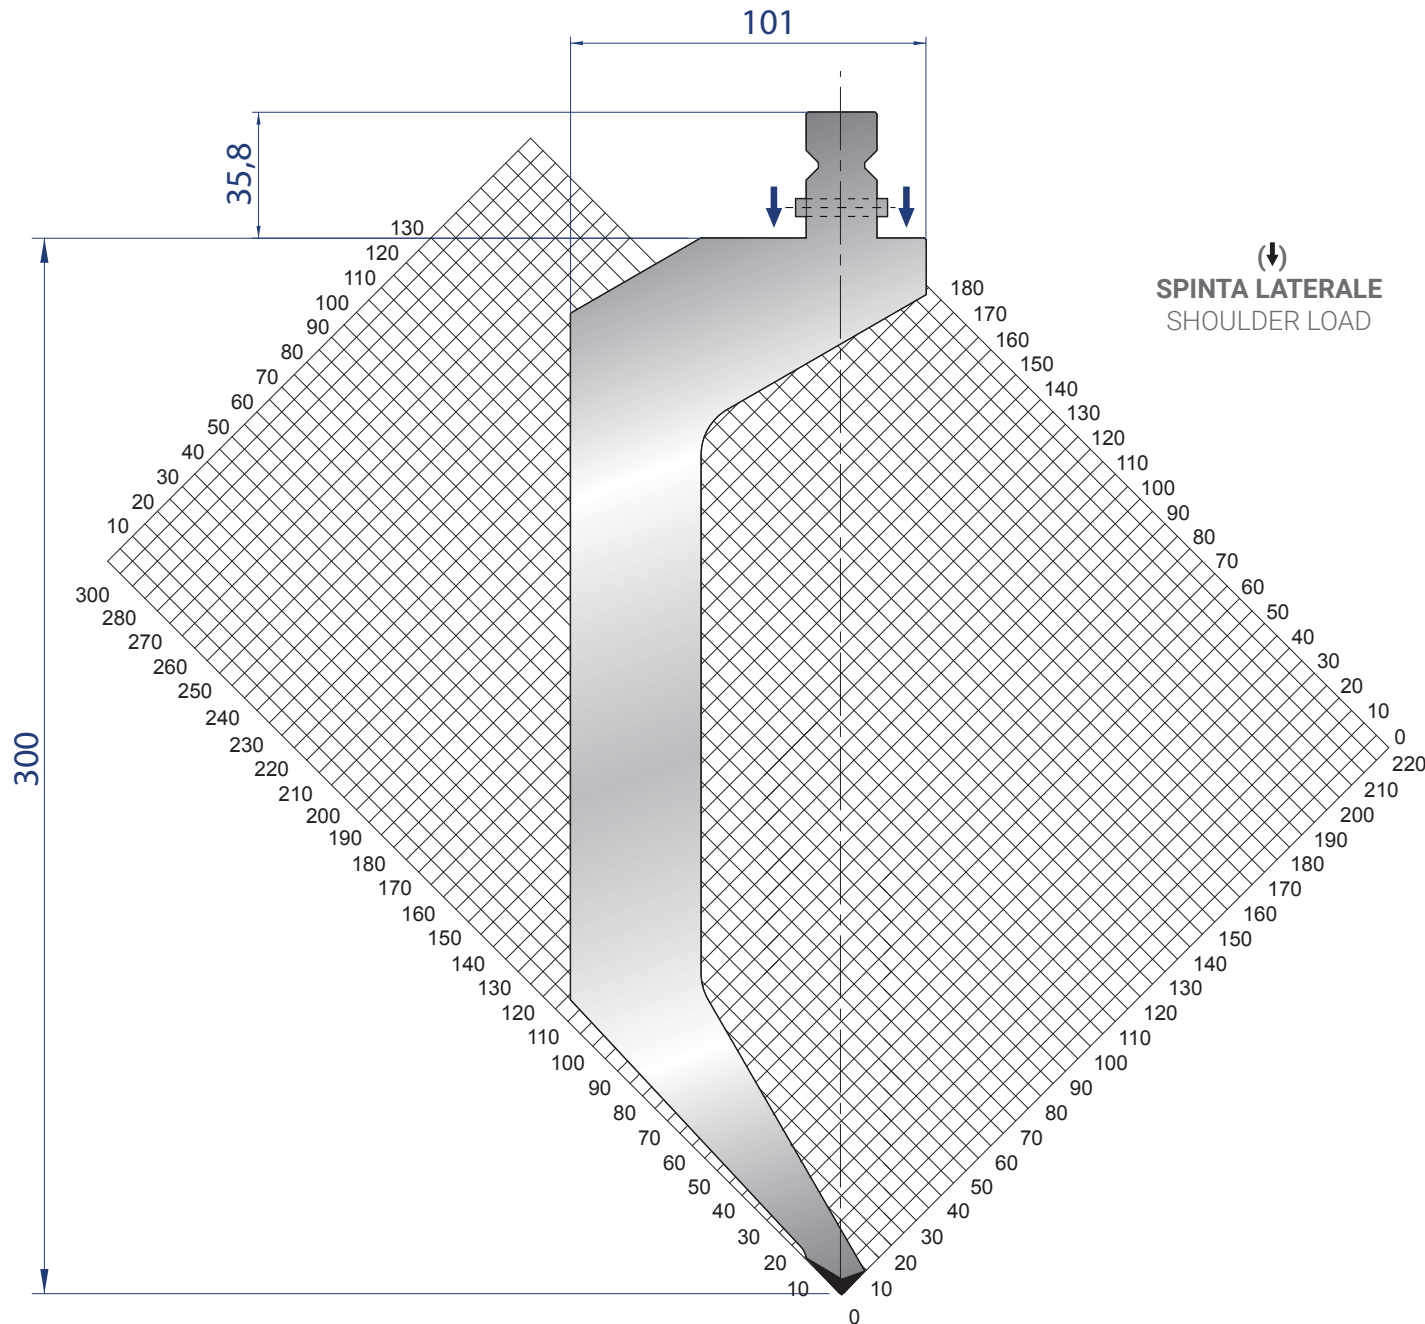

1315

Mat = 42CrMo4  
bonificato / tempered  
H = 300.00  
Max T/m = 80  
 $\alpha = 86^\circ$   
R = 1

25-30	
35-40 mm	3,9 kg
45-50	
100 mm	9,0 kg
100 mm	9,8 kg
200 mm	19,6 kg
550 mm	49,6 kg
1050 mm	102,9 kg
1250 mm	122,5 kg
2050 mm	200,9 kg
2550 mm	249,9 kg
3050 mm	298,9 kg
4050 mm	396,9 kg





1319


Mat = 42CrMo4  
bonificato / tempered

H = 177.00

Max T/m = 20


$\alpha = 80^\circ$

R = 0.5

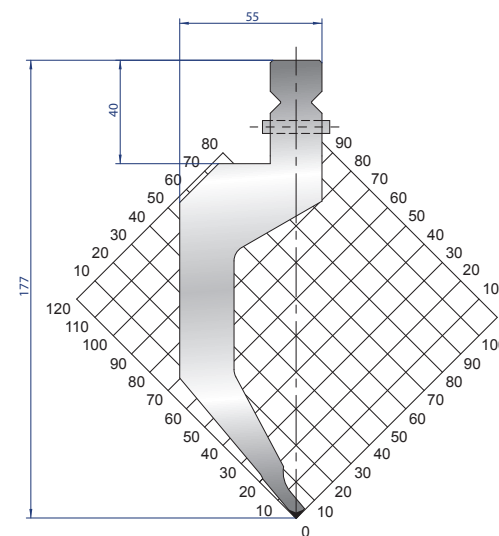

25-30	
35-40 mm	1,2 kg
45-50	
100 mm	2,9 kg
SCARP. / HORN	
100 mm	3,1 kg
200 mm	6,2 kg
300 mm	9,3 kg
500 mm	15,4 kg
550 mm	17,0 kg
FRAZ. / SECT.	
1050 mm	32,5 kg
FRAZ. B / SECT. B	
1250 mm	38,7 kg
FRAZ. B / SECT. B	
2050 mm	63,5 kg
FRAZ. B / SECT. B	
2550 mm	79,0 kg
FRAZ. B / SECT. B	
3050 mm	94,5 kg
FRAZ. B / SECT. B	
4050 mm	125,5 kg
FRAZ. B / SECT. B	

## 1303

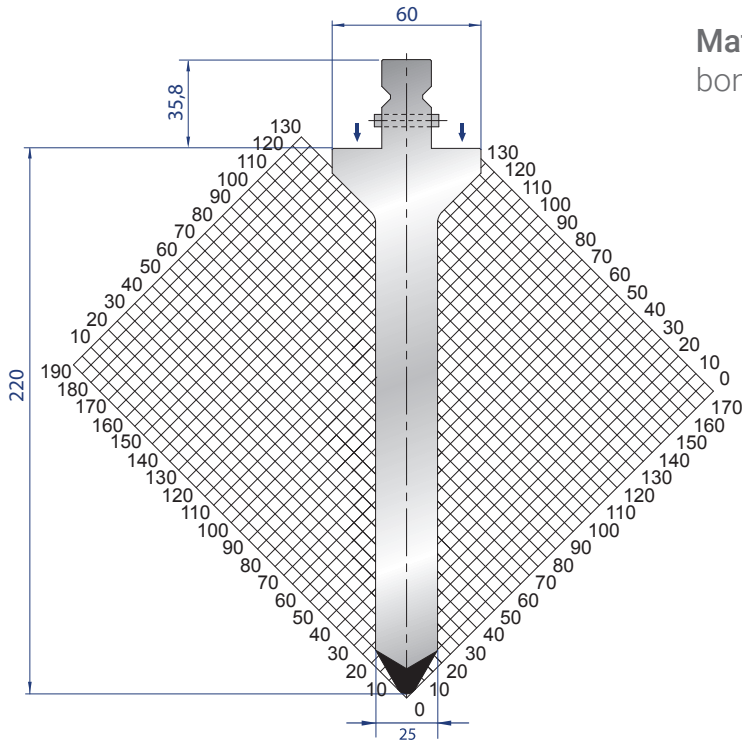


**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 220.00  
**Max T/m** = 100  
 **$\alpha$**  = 60°  
**R** = 4

25-30	
35-40 mm	2,0 kg
45-50	
100 mm	4,6 kg
SCARP. / HORN	
100 mm	5,2 kg
200 mm	10,4 kg
300 mm	15,6 kg
500 mm	26,0 kg
550 mm	28,6 kg
FRAZ. / SECT.	
1050 mm	54,6 kg
FRAZ. B / SECT.B	
1250 mm	65,0 kg
FRAZ. B / SECT.B	
2050 mm	106,6 kg
FRAZ. B / SECT.B	
2550 mm	132,6 kg
FRAZ. B / SECT.B	
3050 mm	158,6 kg
FRAZ. B / SECT.B	
4050 mm	210,6 kg
FRAZ. B / SECT.B	

(↓)  
**SPINTA LATERALE**  
SHOULDER LOAD


## 1318

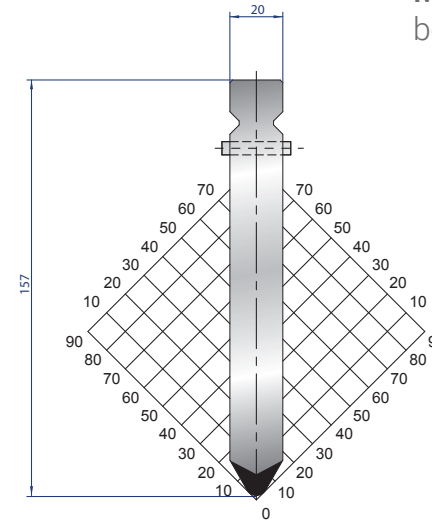

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 157.00  
**Max T/m** = 100  
 **$\alpha$**  = 60°  
**R** = 4

25-30	
35-40 mm	1,0 kg
45-50	
100 mm	2,5 kg
SCARP. / HORN	
100 mm	2,7 kg
200 mm	5,4 kg
300 mm	8,1 kg
500 mm	13,5 kg
550 mm	14,9 kg
FRAZ. / SECT.	
1050 mm	28,3 kg
FRAZ. B / SECT.B	
1250 mm	33,7 kg
FRAZ. B / SECT.B	
2050 mm	55,3 kg
FRAZ. B / SECT.B	
2550 mm	68,8 kg
FRAZ. B / SECT.B	
3050 mm	82,3 kg
FRAZ. B / SECT.B	
4050 mm	109,3 kg
FRAZ. B / SECT.B	



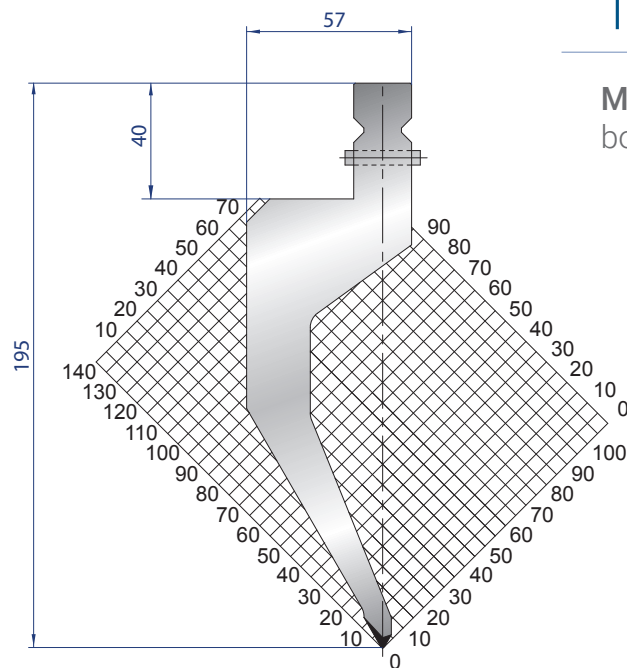

1236

**Mat** = 42CrMo4  
bonificato / tempered

**H** = 195.00


**Max T/m** = 40

**$\alpha$**  = 60°

**R** = 0.8

25-30	
35-40 mm	1,4 kg
45-50	
100 mm	3,0 kg
SCARP / HORN	
100 mm	3,5 kg
200 mm	7,0 kg
300 mm	10,5 kg
500 mm	17,5 kg
550 mm	19,2 kg
FRAZ. / SECT.	
1050 mm	36,7 kg
FRAZ. B. / SECT. B.	
1250 mm	43,7 kg
FRAZ. B. / SECT. B.	
2050 mm	71,7 kg
FRAZ. B. / SECT. B.	
2550 mm	89,2 kg
FRAZ. B. / SECT. B.	
3050 mm	106,7 kg
FRAZ. B. / SECT. B.	
4050 mm	104,7 kg
FRAZ. B. / SECT. B.	



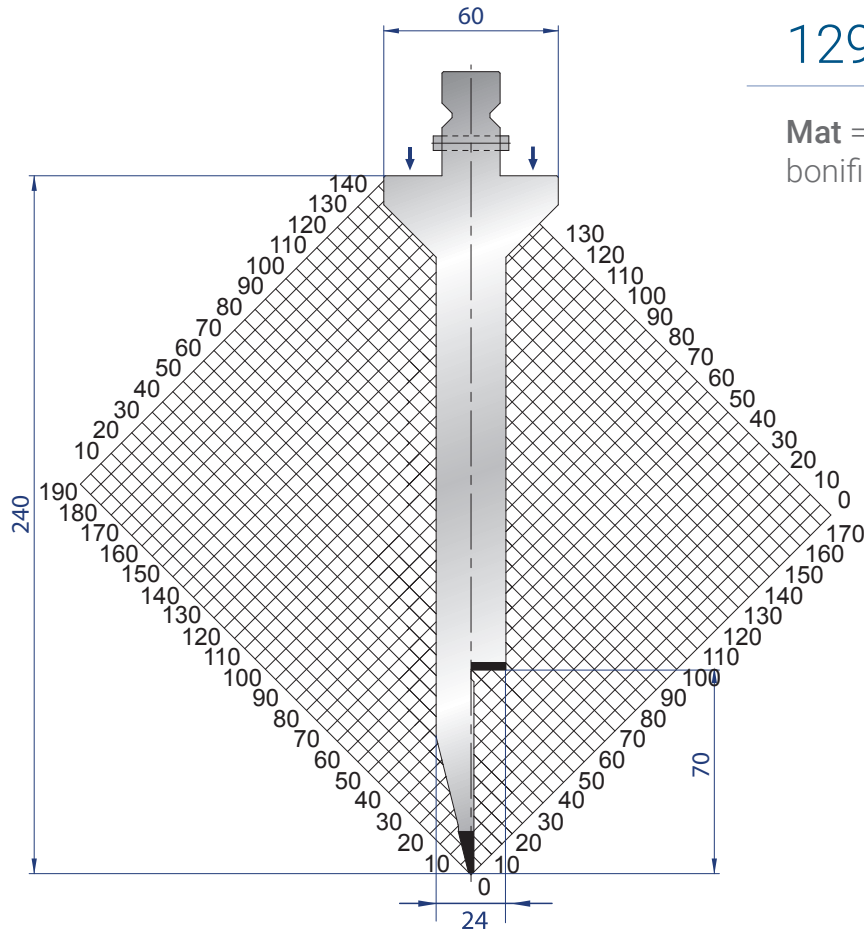


## 1295

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 240.00  
**Max T/m** = 40  
**α** = 28°  
**R** = 1

25-30	
35-40 mm	1,9 kg
45-50	
100 mm	4,0 kg
100 mm	4,8 kg
200 mm	9,5 kg
300 mm	14,3 kg
500 mm	23,8 kg
550 mm	23,8 kg
1050 mm	50,4 kg
1250 mm	60,0 kg
2050 mm	98,4 kg
2550 mm	122,4 kg
3050 mm	146,4 kg
4050 mm	194,4 kg

↓  
**SPINTA LATERALE**  
SHOULDER LOAD

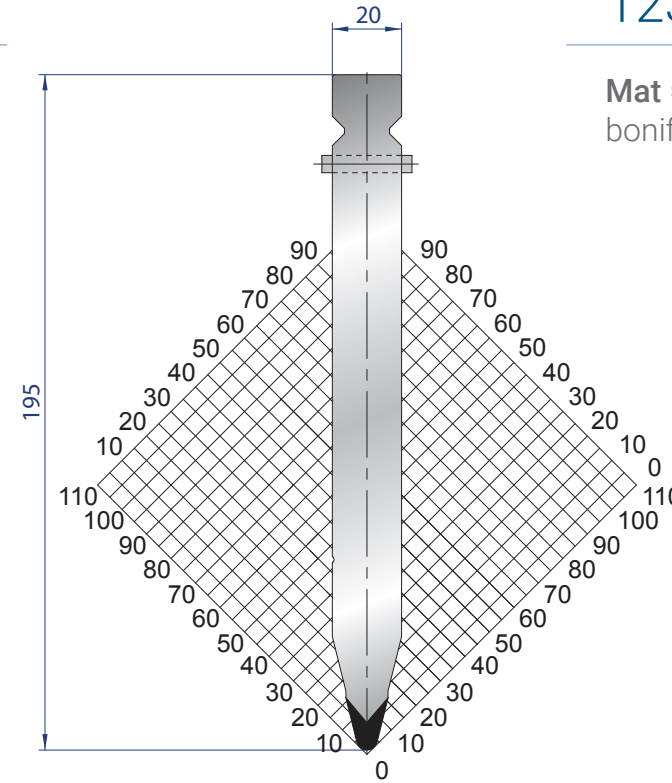


## 1237

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 195.00  
**Max T/m** = 100  
**α** = 28°  
**R** = 3

25-30	
35-40 mm	1,4 kg
45-50	
100 mm	1,1 kg
100 mm	2,5 kg
200 mm	2,8 kg
300 mm	5,6 kg
500 mm	8,4 kg
550 mm	14,0 kg
1050 mm	15,4 kg
1250 mm	29,4 kg
2050 mm	35,0 kg
2550 mm	57,4 kg
3050 mm	71,4 kg
4050 mm	85,4 kg




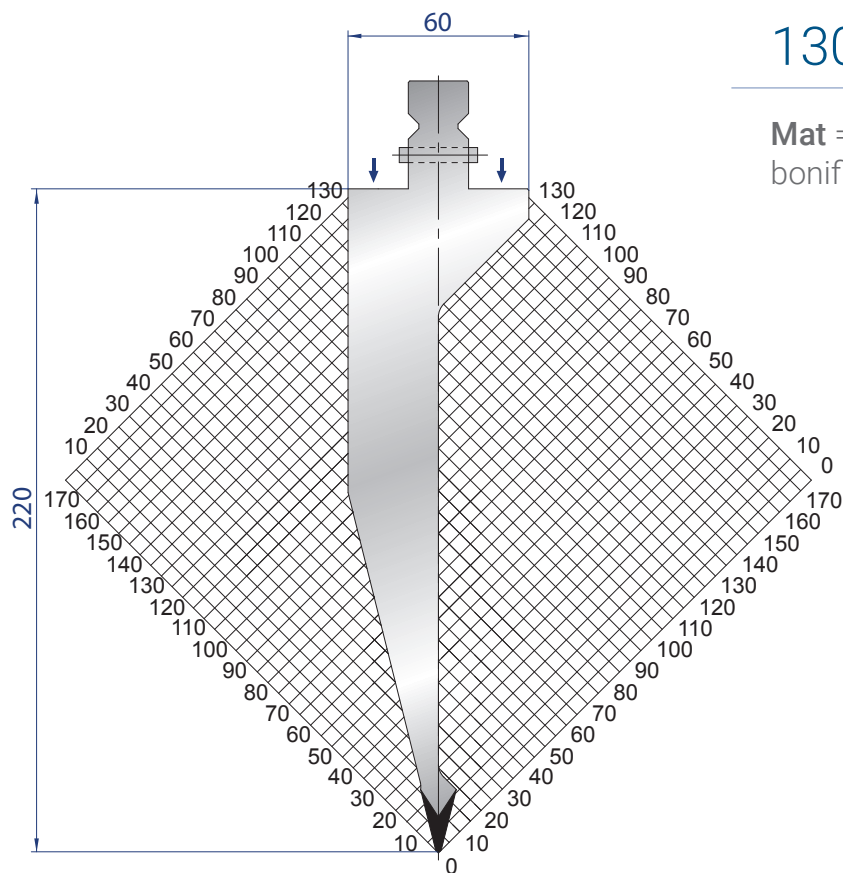

## 1302

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 220.00  
**Max T/m** = 80  
**α** = 28°  
**R** = 1

25-30	
35-40 mm	2,0 kg
45-50	
100 mm	4,5 kg
100 mm	5,0 kg
200 mm	10,0 kg
300 mm	15,0 kg
500 mm	25,0 kg
550 mm	27,5 kg
1050 mm	52,5 kg
1250 mm	62,5 kg
2050 mm	102,5 kg
2550 mm	127,5 kg
3050 mm	152,5 kg
4050 mm	202,5 kg

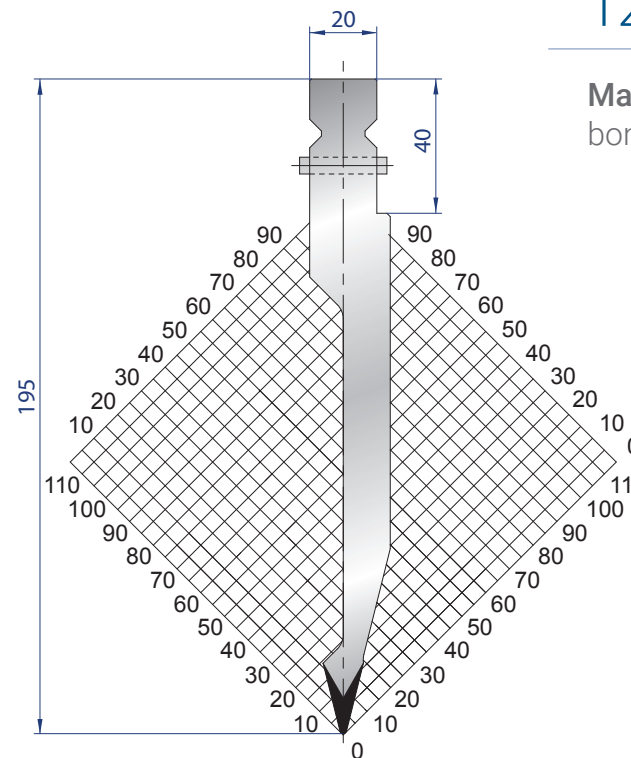

## 1238


**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 195.00  
**Max T/m** = 80  
**α** = 28°  
**R** = 1

25-30	
35-40 mm	0,9 kg
45-50	
100 mm	1,9 kg
100 mm	2,3 kg
200 mm	4,6 kg
300 mm	6,9 kg
500 mm	11,5 kg
550 mm	12,6 kg
1050 mm	24,1 kg
1250 mm	28,7 kg
2050 mm	47,1 kg
2550 mm	58,6 kg
3050 mm	70,0 kg
4050 mm	93,0 kg

↓  
**SPINTA LATERALE**  
SHOULDER LOAD

## 1308

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 140.00  
**Max T/m** = 40  
**α** = 28°  
**R** = 1

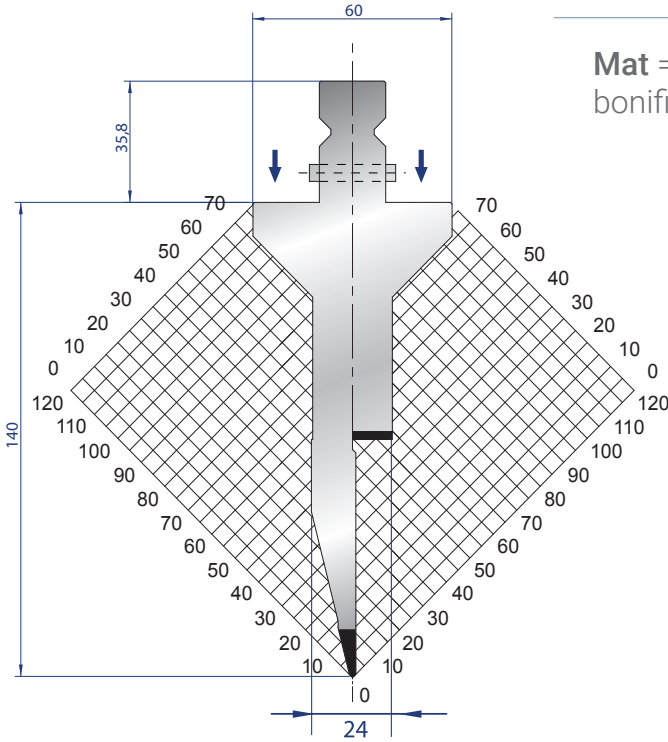


25-30		
35-40 mm		1,1 kg
45-50		
100 mm	SCARP. / HORN	2,7 kg
100 mm		2,9 kg
200 mm		5,8 kg
300 mm		8,7 kg
500 mm		14,5 kg
550 mm	FRAZ. / SECT.	15,9 kg
1050 mm	FRAZ. B / SECT. B	30,4 kg
1250 mm	FRAZ. B / SECT. B	36,2 kg
2050 mm	FRAZ. B / SECT. B	59,4 kg
2550 mm	FRAZ. B / SECT. B	73,9 kg
3050 mm	FRAZ. B / SECT. B	88,4 kg
4050 mm	FRAZ. B / SECT. B	117,4 kg

↓  
**SPINTA LATERALE**  
SHOULDER LOAD

## 1313

**Mat** = 42CrMo4  
bonificato / tempered  
**H** = 157.00  
**Max T/m** = 80  
**α** = 28°  
**R** = 1

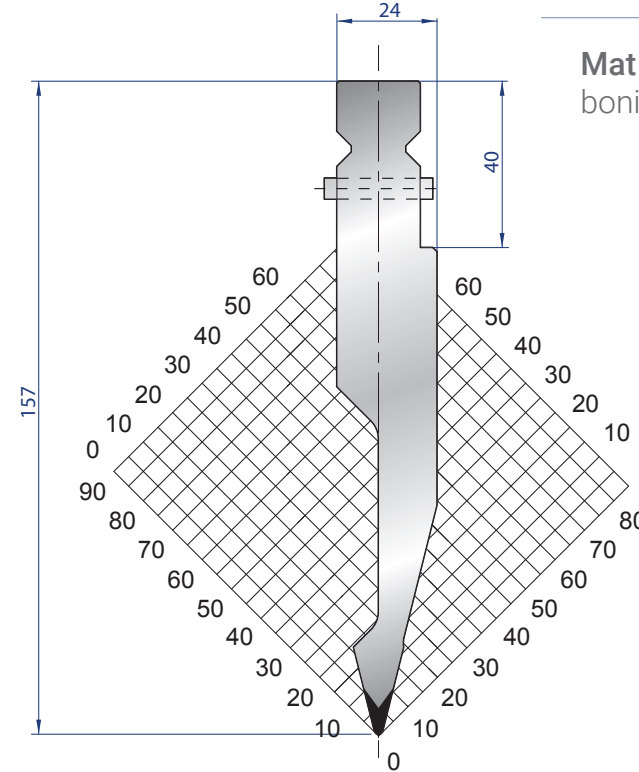


25-30		
35-40 mm		0,8 kg
45-50		
100 mm	SCARP. / HORN	1,8 kg
100 mm		2,0 kg
200 mm		4,0 kg
300 mm		6,0 kg
500 mm		10,0 kg
550 mm	FRAZ. / SECT.	11,0 kg
1050 mm	FRAZ. B / SECT. B	21,0 kg
1250 mm	FRAZ. B / SECT. B	25,0 kg
2050 mm	FRAZ. B / SECT. B	41,0 kg
2550 mm	FRAZ. B / SECT. B	51,0 kg
3050 mm	FRAZ. B / SECT. B	61,0 kg
4050 mm	FRAZ. B / SECT. B	81,0 kg




1316

**Mat** = 42CrMo4  
 bonificato / tempered  
**H** = 195.00  
**Max T/m** = 100  
 **$\alpha$**  = 26°  
**R** = 0.8

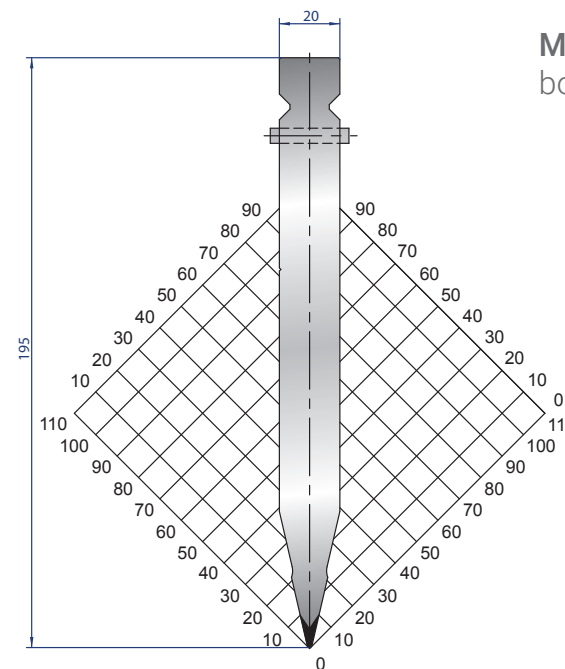

25-30	1,0 kg
35-40	
45-50	
100 mm SCARP. / HORN	2,5 kg
100 mm	2,7 kg
200 mm	5,4 kg
300 mm	8,1 kg
500 mm	13,5 kg
550 mm FRAZ. / SECT.	14,9 kg
1050 mm FRAZ. B / SECT. B	28,3 kg
1250 mm FRAZ. B / SECT. B	33,7 kg
2050 mm FRAZ. B / SECT. B	55,3 kg
2550 mm FRAZ. B / SECT. B	68,8 kg
3050 mm FRAZ. B / SECT. B	82,3 kg
4050 mm FRAZ. B / SECT. B	109,3 kg


TRUMPF  
STYLE

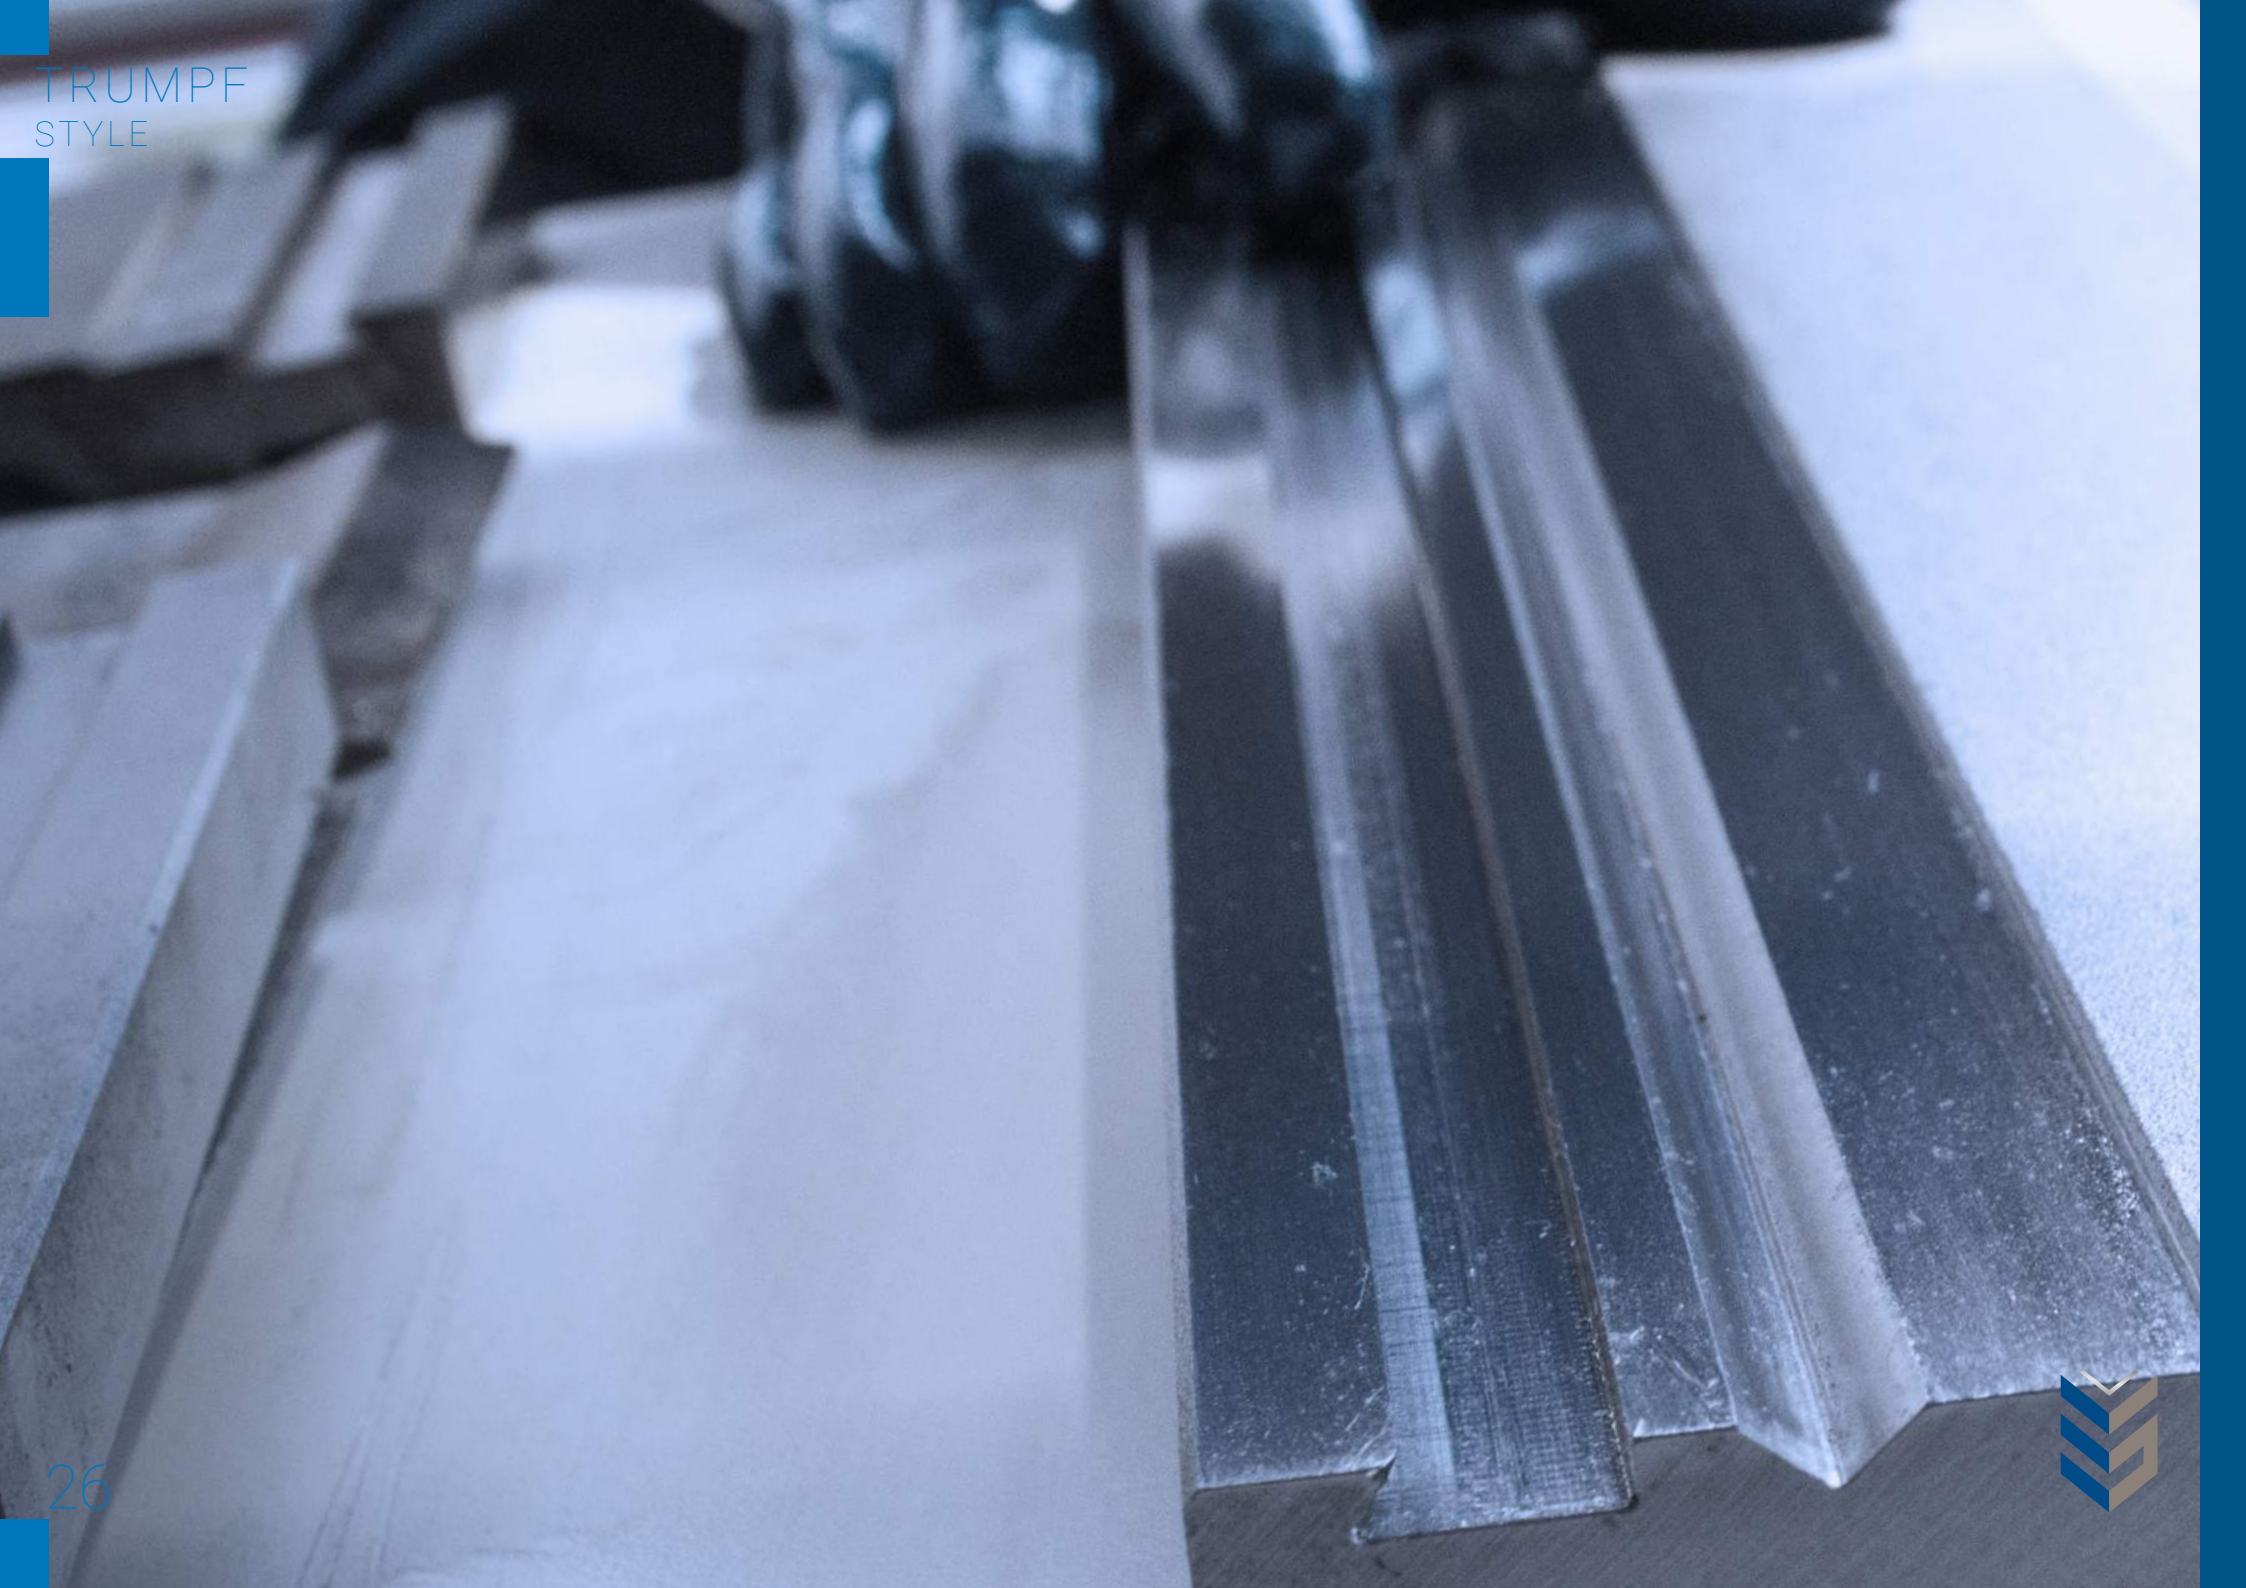




**8210**

FRESATURA PULSANTE  
MILLING FOR SAFETY BUTTON




**8211**

CODICI / CODES  
-1237 -1240  
-1316 -1318




**8218**

CODICI / CODES  
-1238 -1249  
-1250 -1251- 1313




**8212**

CODICI / CODES  
-1234 -1235  
-1317 -4191




**8213**

CODICI / CODES  
-1295-1302  
-1303-1308-4361




**8214**

CODICI / CODES  
-1233 -1314  
-1319




**8215**

CODICI / CODES  
- 1236




**8216**


CODICI / CODES  
- 1294 -1320

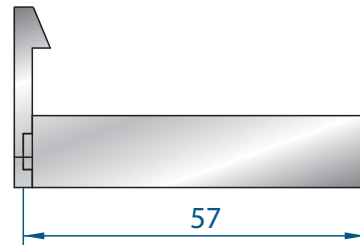

**8219**


CODICI / CODES  
- 1315

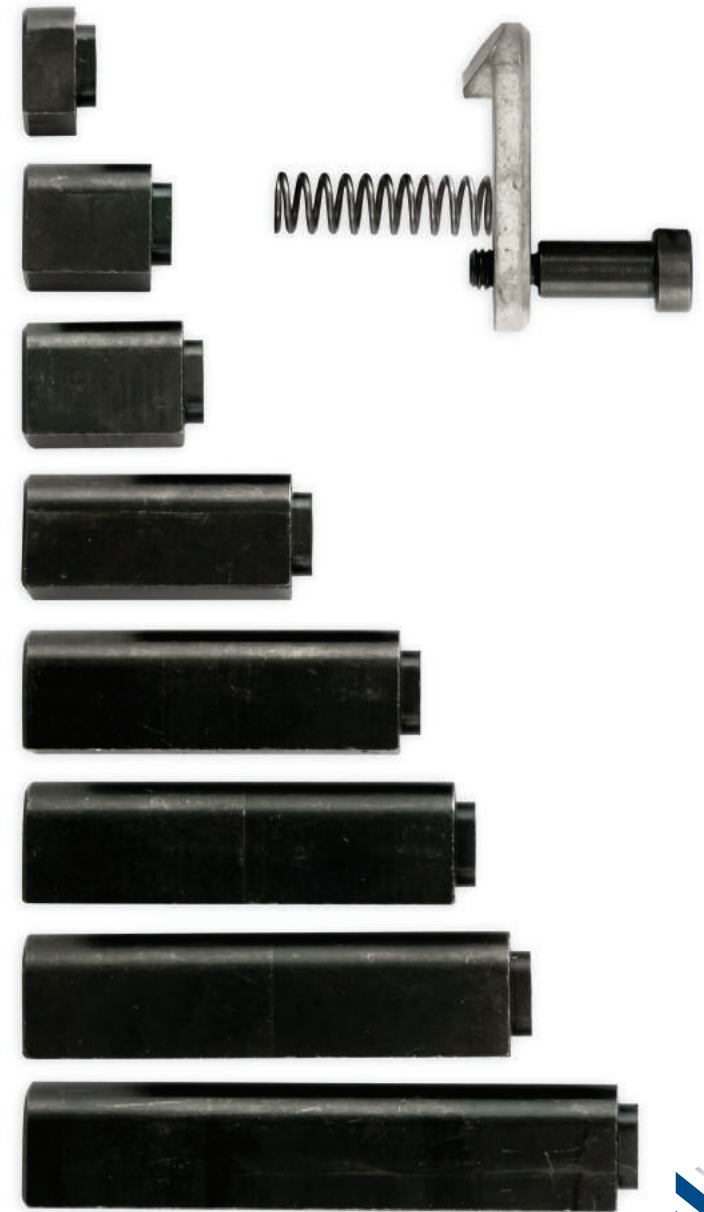

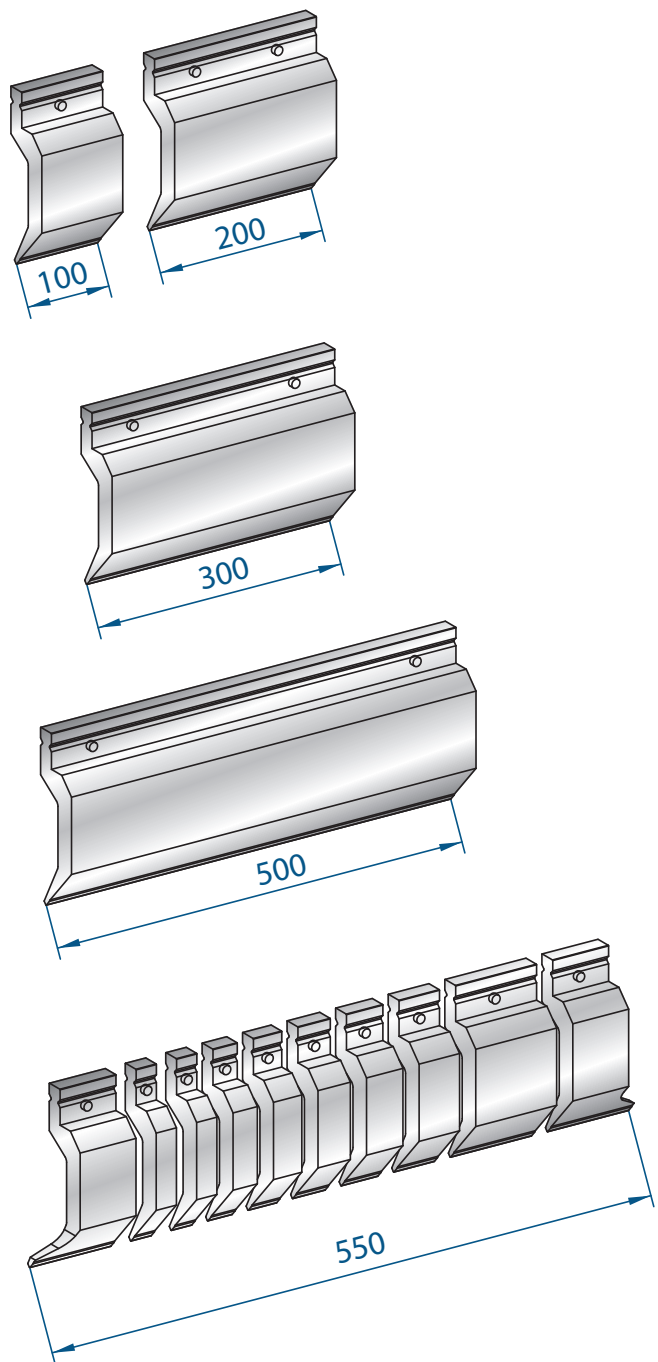



1323

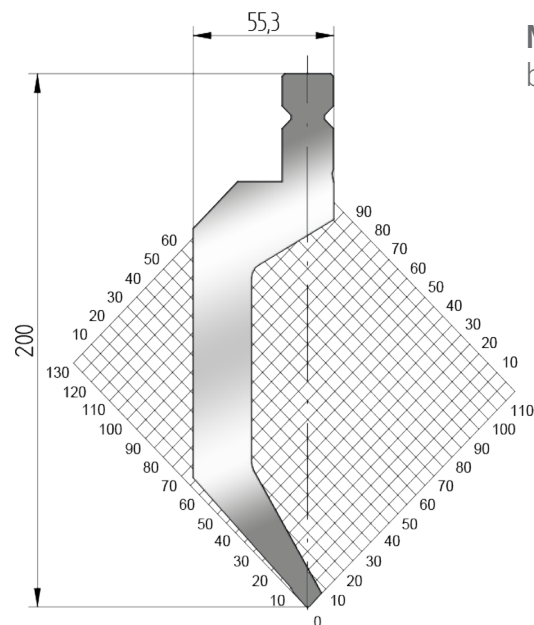

**Mat** = 42CrMo4  
bonificato / tempered

**H** = 200.00


**Max T/m** = 65

**$\alpha$**  = 86°

**R** = 1

515 mm	19,1 kg
550 mm FRAZ. / SECT.	19 kg



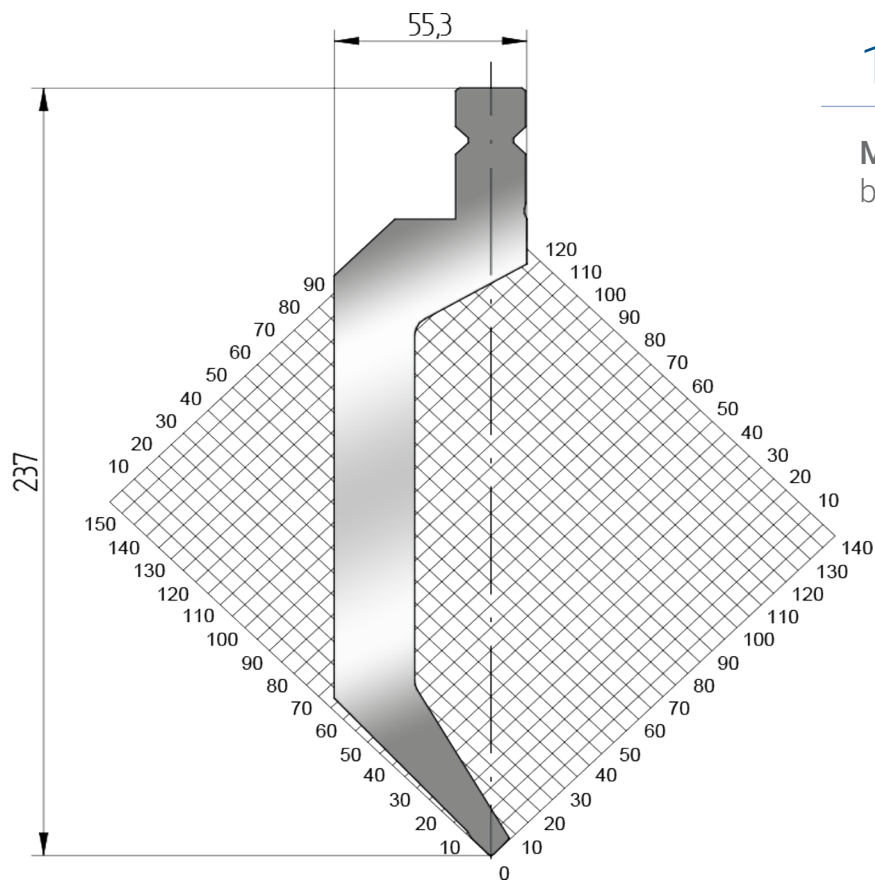

1324

Mat = 42CrMo4  
bonificato / tempered

H = 237.00


Max T/m = 86

$\alpha = 86^\circ$

R = 1

515 mm	22,5 kg
550 mm FRAZ. / SECT.	22,3 kg



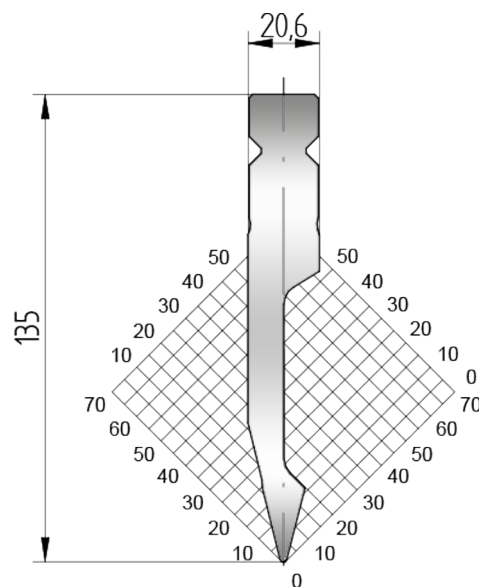


1325

**Mat** = 42CrMo4  
 bonificato / tempered  
**H** = 135.00  
**Max T/m** = 100  
 **$\alpha$**  = 28°  
**R** = 1

515 mm	7,2 kg
550 mm FRAZ. / SECT.	7,3 kg



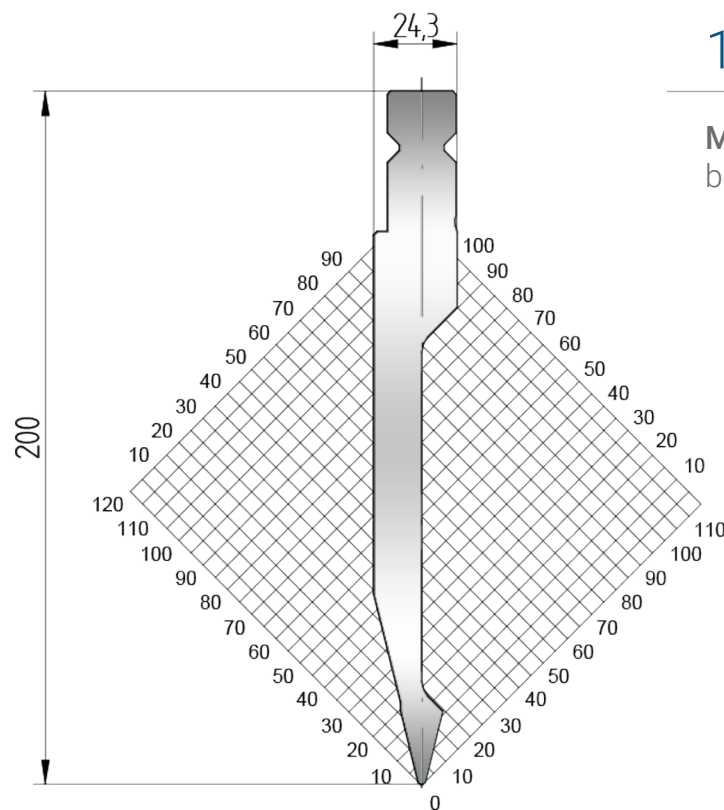


1326

**Mat** = 42CrMo4  
 bonificato / tempered  
**H** = 200.00  
**Max T/m** = 100  
 **$\alpha$**  = 28°  
**R** = 1

515 mm	12,1 kg
550 mm FRAZ. / SECT.	12,1 kg





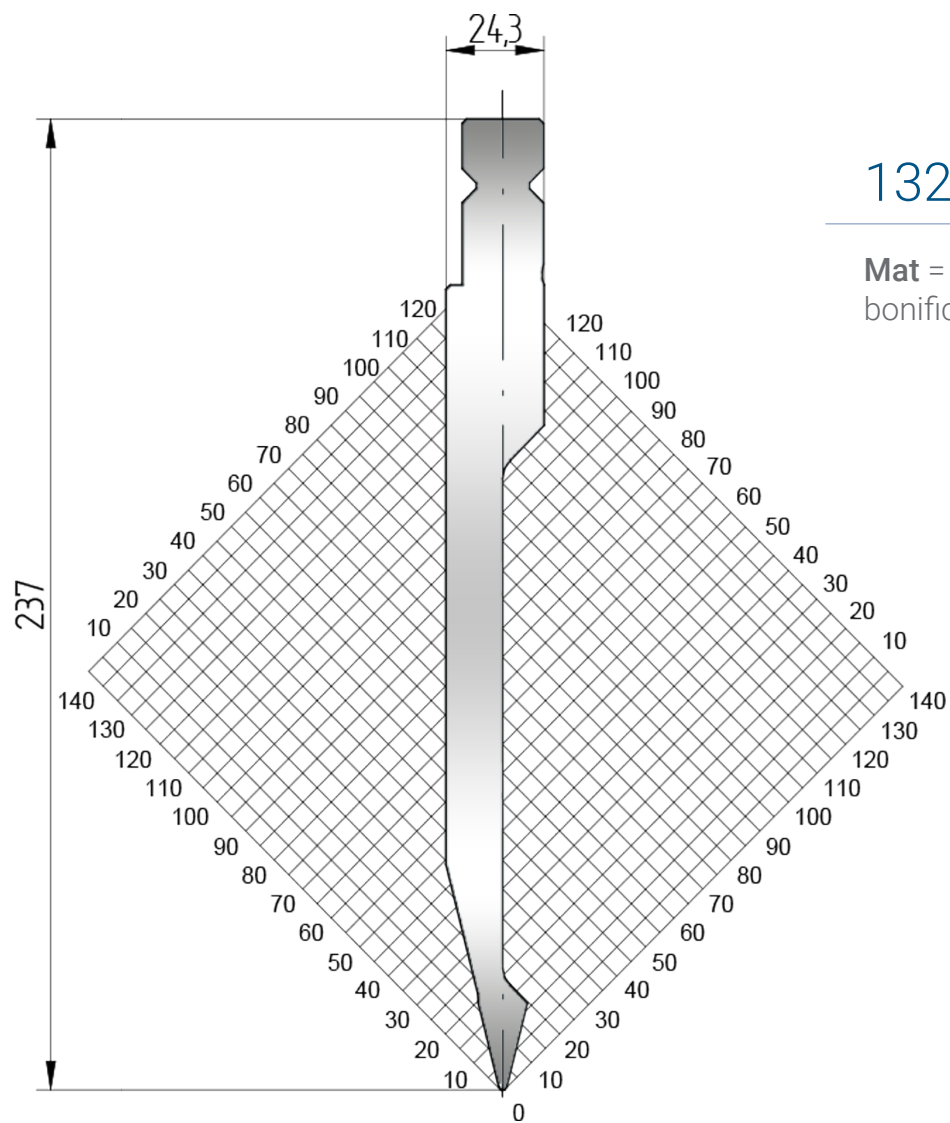

1327

**Mat** = 42CrMo4  
 bonificato / tempered  
**H** = 135.00  
**Max T/m** = 100  
 $\alpha$  = 28°  
**R** = 1

515 mm	14,7 kg
550 mm FRAZ. / SECT.	14,7 kg