


25-30	
35-40 mm	2,0 kg
45-50	
100 mm	5,2 kg
200 mm	10,4 kg
300 mm	15,6 kg
500 mm	26,0 kg
550 mm	28,6 kg
FRAZ. / SECT.	
1050 mm	54,6 kg
FRAZ. B / SECT. B	
1250 mm	65,0 kg
FRAZ. B / SECT. B	
2050 mm	106,6 kg
FRAZ. B / SECT. B	
2550 mm	132,6 kg
FRAZ. B / SECT. B	
3050 mm	158,6 kg
FRAZ. B / SECT. B	
4050 mm	210,6 kg
FRAZ. B / SECT. B	

3133

Mat = C45  
Max T/m = 100  
 $\alpha = 80^\circ$

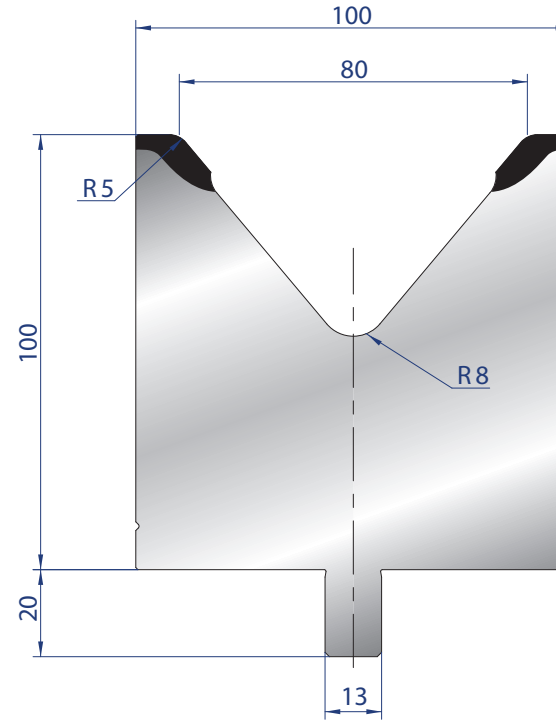


25-30	
35-40 mm	2,5 kg
45-50	
100 mm	6,4 kg
200 mm	12,8 kg
300 mm	19,2 kg
500 mm	32,0 kg
550 mm	35,2 kg
FRAZ. / SECT.	
1050 mm	67,2 kg
FRAZ. B / SECT. B	
1250 mm	80,0 kg
FRAZ. B / SECT. B	
2050 mm	131,2 kg
FRAZ. B / SECT. B	
2550 mm	163,2 kg
FRAZ. B / SECT. B	
3050 mm	195,2 kg
FRAZ. B / SECT. B	
4050 mm	259,2 kg
FRAZ. B / SECT. B	

3134

Mat = C45  
Max T/m = 100  
 $\alpha = 80^\circ$




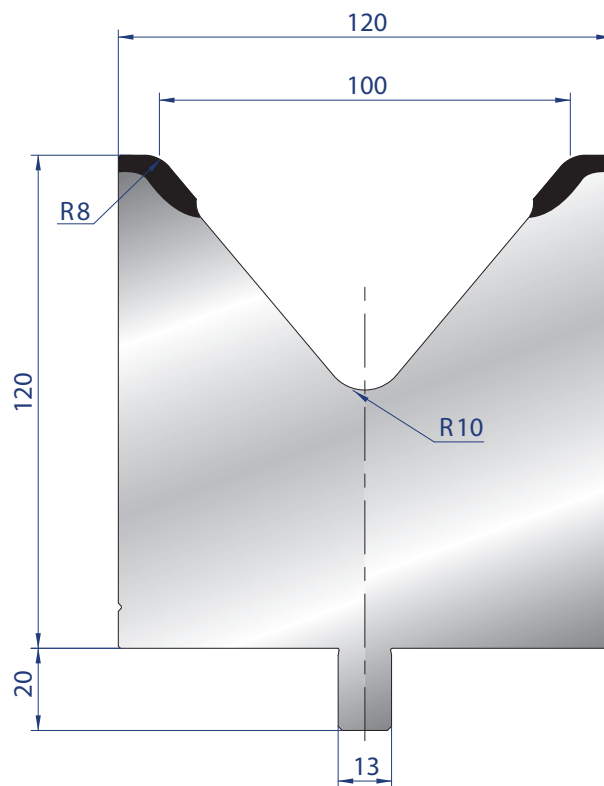

25-30	
35-40 mm	3,6 kg
45-50	
100 mm	9,0 kg
200 mm	18,0 kg
300 mm	27,0 kg
500 mm	45,0 kg
550 mm	49,5 kg
FRAZ. / SECT.	
1050 mm	44,5 kg
FRAZ. B / SECT. B	
1250 mm	112,5 kg
FRAZ. B / SECT. B	
2050 mm	184,5 kg
FRAZ. B / SECT. B	
2550 mm	229,5 kg
FRAZ. B / SECT. B	
3050 mm	274,5 kg
FRAZ. B / SECT. B	
4050 mm	364,5 kg
FRAZ. B / SECT. B	

3135


Mat = C45  
Max T/m = 100  
 $\alpha = 80^\circ$

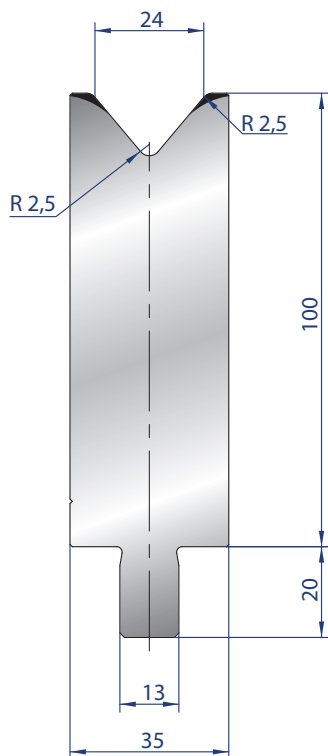

25-30	1,1 kg
35-40 mm	
45-50	
100 mm	2,8 kg
200 mm	5,6 kg
300 mm	8,4 kg
500 mm	14,0 kg
550 mm	15,4 kg
1050 mm	29,4 kg
1250 mm	35,0 kg
2050 mm	57,4 kg
2550 mm	71,4 kg
3050 mm	85,4 kg
4050 mm	113,4 kg

3231


**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 100  
**α** = 80°

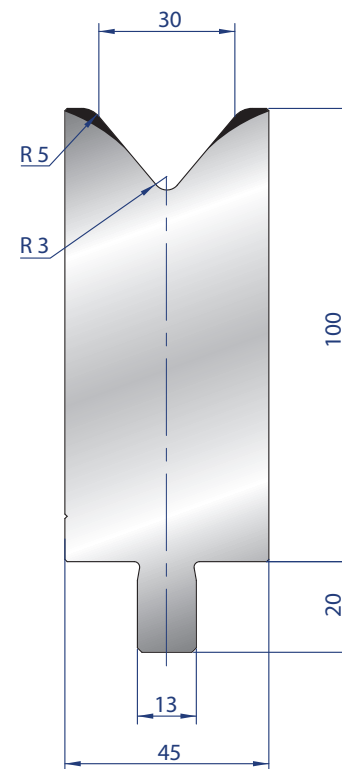

25-30	1,4 kg
35-40 mm	
45-50	
100 mm	3,5 kg
200 mm	7,0 kg
300 mm	10,5 kg
500 mm	17,5 kg
550 mm	19,3 kg
1050 mm	36,7 kg
1250 mm	43,7 kg
2050 mm	71,7 kg
2550 mm	89,2 kg
3050 mm	106,7 kg
4050 mm	141,7 kg

3232


**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 120  
**α** = 80°

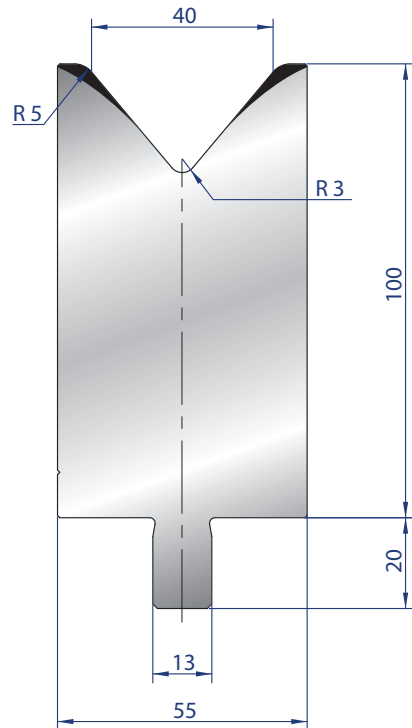

25-30	1,6 kg
35-40 mm	
45-50	
100 mm	4,1 kg
200 mm	8,2 kg
300 mm	12,3 kg
500 mm	20,6 kg
550 mm	22,7 kg
FRAZ. / SECT.	
1050 mm	43,0 kg
FRAZ. B / SECT. B	
1250 mm	51,2 kg
FRAZ. B / SECT. B	
2050 mm	84,0 kg
FRAZ. B / SECT. B	
2550 mm	104,5 kg
FRAZ. B / SECT. B	
3050 mm	125,0 kg
FRAZ. B / SECT. B	
4050 mm	166,0 kg
FRAZ. B / SECT. B	

3233

**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 150  
**α** = 80°

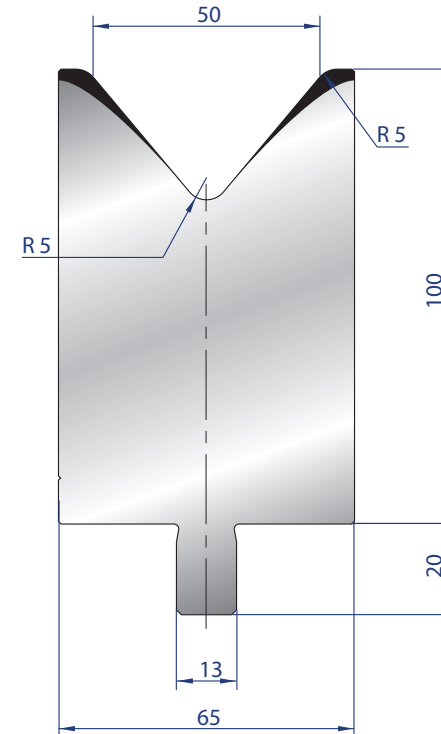


25-30	1,8 kg
35-40 mm	
45-50	
100 mm	4,6 kg
200 mm	9,2 kg
300 mm	13,8 kg
500 mm	23,0 kg
550 mm	25,3 kg
FRAZ. / SECT.	
1050 mm	48,3 kg
FRAZ. B / SECT. B	
1250 mm	57,5 kg
FRAZ. B / SECT. B	
2050 mm	94,3 kg
FRAZ. B / SECT. B	
2550 mm	117,3 kg
FRAZ. B / SECT. B	
3050 mm	140,3 kg
FRAZ. B / SECT. B	
4050 mm	186,3 kg
FRAZ. B / SECT. B	

3234

**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 150  
**α** = 80°




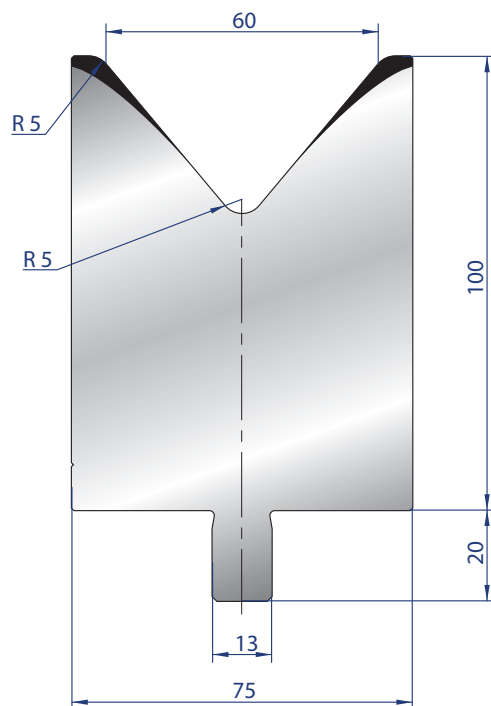

25-30	
35-40 mm	2,0 kg
45-50	
100 mm	5,2 kg
200 mm	10,4 kg
300 mm	15,6 kg
500 mm	26,0 kg
550 mm	28,6 kg
FRAZ. B / SECT. B	
1050 mm	54,6 kg
FRAZ. B / SECT. B	
1250 mm	65,0 kg
FRAZ. B / SECT. B	
2050 mm	106,6 kg
FRAZ. B / SECT. B	
2550 mm	132,6 kg
FRAZ. B / SECT. B	
3050 mm	158,6 kg
FRAZ. B / SECT. B	
4050 mm	210,6 kg
FRAZ. B / SECT. B	

3219


**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 150  
**α** = 80°

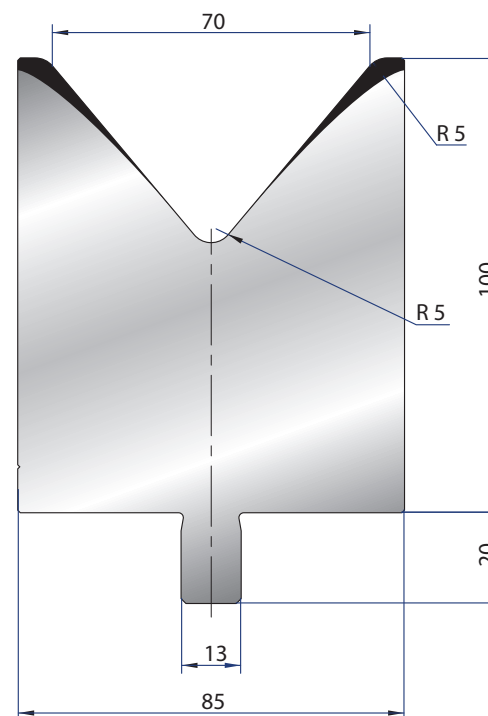

25-30	
35-40 mm	2,2 kg
45-50	
100 mm	5,6 kg
200 mm	11,2 kg
300 mm	16,8 kg
500 mm	28,0 kg
FRAZ. B / SECT. B	
1050 mm	58,8 kg
FRAZ. B / SECT. B	
1250 mm	70,0 kg
FRAZ. B / SECT. B	
2050 mm	114,8 kg
FRAZ. B / SECT. B	
2550 mm	142,8 kg
FRAZ. B / SECT. B	
3050 mm	170,8 kg
FRAZ. B / SECT. B	
4050 mm	226,8 kg
FRAZ. B / SECT. B	

3220


**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 150  
**α** = 80°

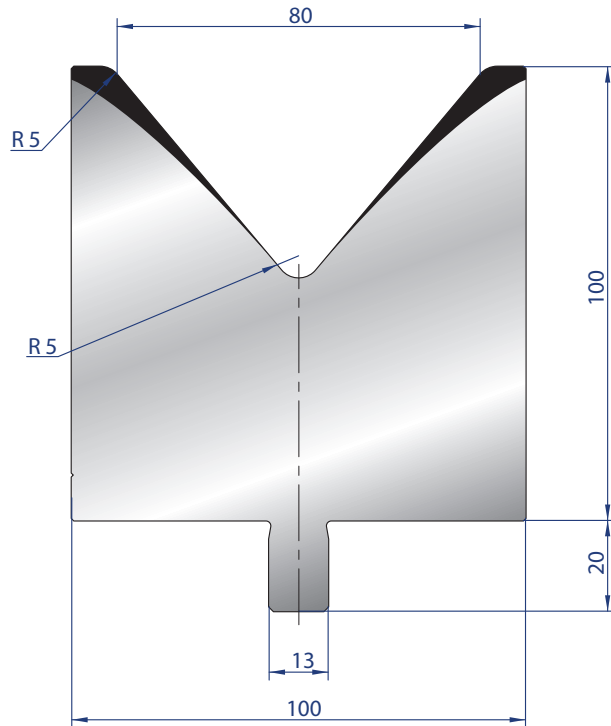

25-30	
35-40 mm	2,5 kg
45-50	
100 mm	6,4 kg
200 mm	12,8 kg
300 mm	19,2 kg
550 mm	35,2 kg
1050 mm	67,2 kg
1250 mm	80,0 kg
2050 mm	131,2 kg
2550 mm	163,2 kg
3050 mm	195,2 kg
4050 mm	259,2 kg

3221

**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 150  
**α** = 80°

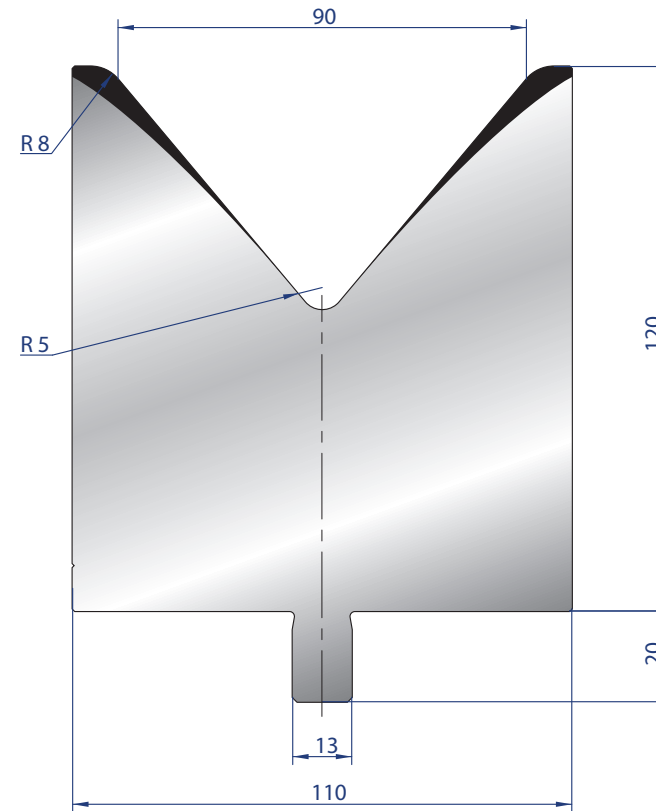


25-30	
35-40 mm	3,4 kg
45-50	
100 mm	8,5 kg
200 mm	17,0 kg
550 mm	46,7 kg
1050 mm	89,2 kg
1250 mm	106,2 kg
2050 mm	174,2 kg
2550 mm	216,7 kg
3050 mm	259,2 kg
4050 mm	344,2 kg

3222

**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 150  
**α** = 80°



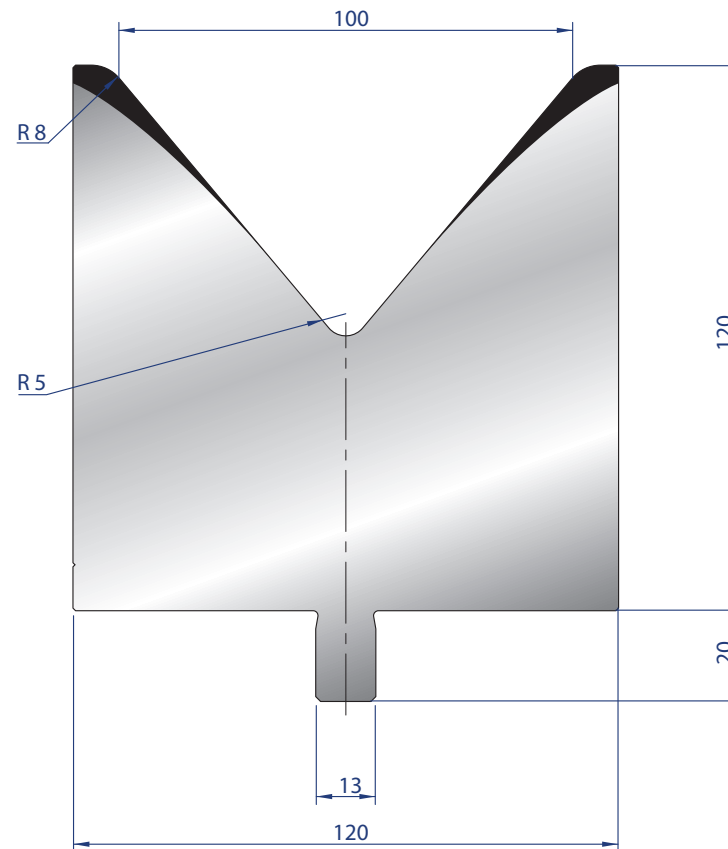

25-30	
35-40 mm	3,5 kg
45-50	
100 mm	8,9 kg
200 mm	17,8 kg
550 mm	48,9 kg
1050 mm	93,4 kg
1250 mm	111,2 kg
2050 mm	182,4 kg
2550 mm	226,9 kg
3050 mm	271,4 kg
4050 mm	360,4 kg

3223

**Mat** = 42CrMo4  
bonificato / tempered

**Max T/m** = 150

**$\alpha$**  = 80°