


25-30	
35-40 mm	0,6 kg
45-50	
100 mm	1,8 kg
200 mm	3,6 kg
300 mm	5,4 kg
500 mm	8,7 kg
550 mm	9,6 kg
FRAZ. / SECT.	
1050 mm	18,9 kg
FRAZ. B / SECT. B	
1250 mm	22,5 kg
FRAZ. B / SECT. B	
2050 mm	36,9 kg
FRAZ. B / SECT. B	
2550 mm	45,9 kg
FRAZ. B / SECT. B	
3050 mm	54,9 kg
FRAZ. B / SECT. B	
4050 mm	72,9 kg
FRAZ. B / SECT. B	

3225

**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 130  
**α** = 84°

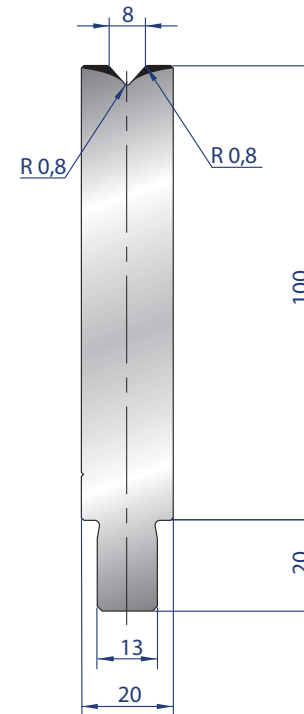


25-30	
35-40 mm	0,6 kg
45-50	
100 mm	1,8 kg
200 mm	3,6 kg
300 mm	5,4 kg
500 mm	8,7 kg
550 mm	9,6 kg
FRAZ. / SECT.	
1050 mm	18,9 kg
FRAZ. B / SECT. B	
1250 mm	22,5 kg
FRAZ. B / SECT. B	
2050 mm	36,9 kg
FRAZ. B / SECT. B	
2550 mm	45,9 kg
FRAZ. B / SECT. B	
3050 mm	54,9 kg
FRAZ. B / SECT. B	
4050 mm	72,9 kg
FRAZ. B / SECT. B	

3226

**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 100  
**α** = 84°




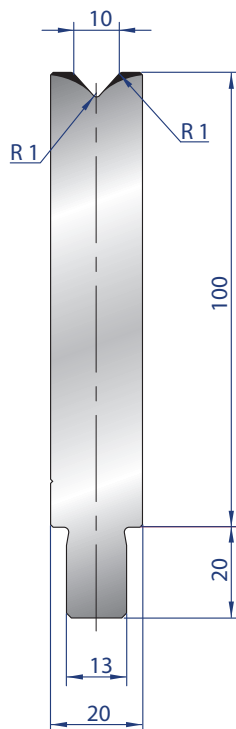

25-30	
35-40 mm	0,6 kg
45-50	
100 mm	1,8 kg
200 mm	3,6 kg
300 mm	5,4 kg
500 mm	8,7 kg
550 mm	9,6 kg
1050 mm	18,9 kg
1250 mm	22,5 kg
2050 mm	36,9 kg
2550 mm	45,9 kg
3050 mm	54,9 kg
4050 mm	72,9 kg

3227


**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 100  
**α** = 84°

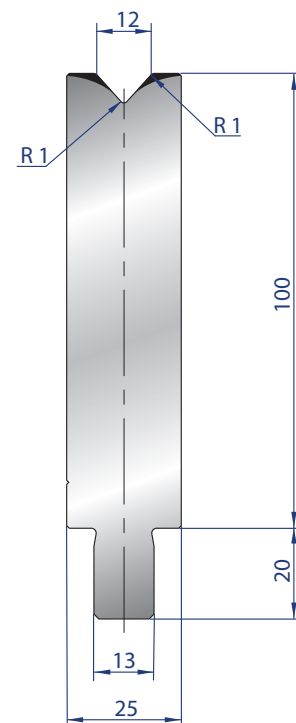

25-30	
35-40 mm	0,8 kg
45-50	
100 mm	2,0 kg
200 mm	4,1 kg
300 mm	6,2 kg
500 mm	10,2 kg
550 mm	11,3 kg
1050 mm	21,0 kg
1250 mm	25,0 kg
2050 mm	41,0 kg
2550 mm	51,0 kg
3050 mm	61,0 kg
4050 mm	81,0 kg

3228


**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 100  
**α** = 84°

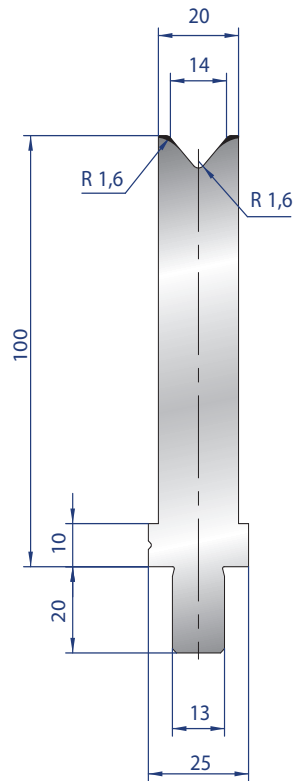

25-30	0,6 kg
35-40 mm	
45-50	
100 mm	1,8 kg
200 mm	3,5 kg
300 mm	5,3 kg
500 mm	8,8 kg
550 mm	9,7 kg
FRAZ. / SECT.	
1050 mm	17,6 kg
FRAZ. B / SECT. B	
1250 mm	21,1 kg
FRAZ. B / SECT. B	
2050 mm	35,2 kg
FRAZ. B / SECT. B	
2550 mm	44,0 kg
FRAZ. B / SECT. B	
3050 mm	52,8 kg
FRAZ. B / SECT. B	
4050 mm	70,4 kg
FRAZ. B / SECT. B	

3244


**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 90  
**α** = 84°

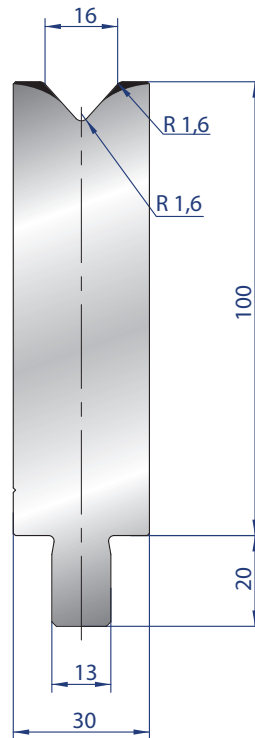

25-30	1,0 kg
35-40 mm	
45-50	
100 mm	2,5 kg
200 mm	5,0 kg
300 mm	7,5 kg
500 mm	12,5 kg
550 mm	13,8 kg
FRAZ. / SECT.	
1050 mm	26,2 kg
FRAZ. B / SECT. B	
1250 mm	31,2 kg
FRAZ. B / SECT. B	
2050 mm	51,2 kg
FRAZ. B / SECT. B	
2550 mm	63,7 kg
FRAZ. B / SECT. B	
3050 mm	76,2 kg
FRAZ. B / SECT. B	
4050 mm	101,2 kg
FRAZ. B / SECT. B	

3229

**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 100  
**α** = 84°

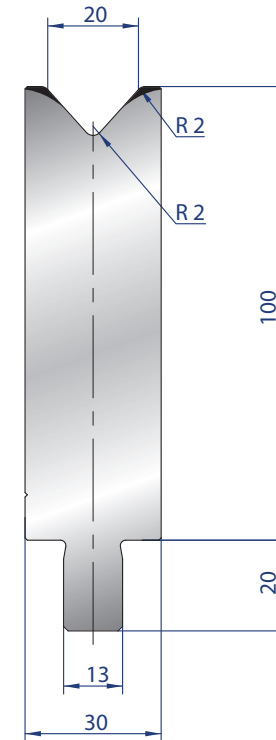

25-30	1,0 kg
35-40 mm	
45-50	
100 mm	2,5 kg
200 mm	5,0 kg
300 mm	7,5 kg
500 mm	12,5 kg
550 mm	13,8 kg
FRAZ. / SECT.	
1050 mm	26,2 kg
FRAZ. B / SECT. B	
1250 mm	31,2 kg
FRAZ. B / SECT. B	
2050 mm	51,2 kg
FRAZ. B / SECT. B	
2550 mm	63,7 kg
FRAZ. B / SECT. B	
3050 mm	76,2 kg
FRAZ. B / SECT. B	
4050 mm	101,2 kg
FRAZ. B / SECT. B	

3230

**Mat** = 42CrMo4  
bonificato / tempered  
**Max T/m** = 100  
**α** = 84°

